


# ShawContract®

## Central 6 X 12 Covebase Matte

Style Number	<b>CT11K</b>
Composition	<b>Porcelain</b>
Tile Type	<b>Covebase</b>
Body Type	<b>Glazed Porcelain</b>
Finish	<b>Matte</b>
Nominal Dimensions	<b>6" x 12"   15.24 cm x 30.48 cm</b>
Actual Dimensions	<b>6.42" x 11.75"   16.3 cm x 29.85 cm</b>
Overall Thickness	<b>0.314"   8 mm</b>
Edge Profile	<b>Cut</b>
Country Of Origin	<b>United States</b>
Installation Area	<b>Walls</b>
Retail Unit Of Measure	<b>Sold by the individual piece</b>

### Packaging

Pieces per Carton	<b>8</b>
Area per Carton	<b>3.88 ft<sup>2</sup></b>
Area per Pallet	<b>194 ft<sup>2</sup></b>
Boxes per Pallet	<b>50 boxes</b>

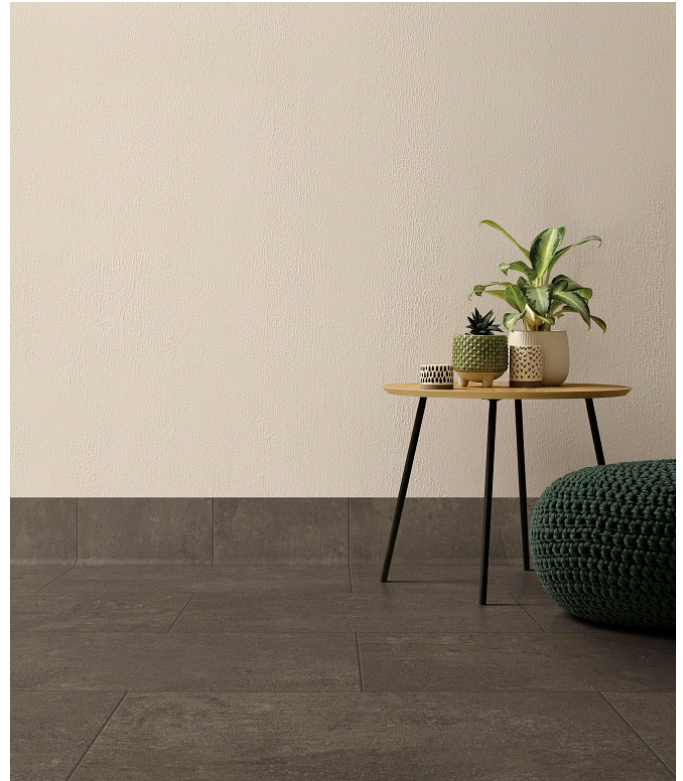


### Performance + Testing

Shade Variation	<b>V2</b>
Breaking Strength (ASTM C648)	<b>≥ 125 lbf</b>
DCOF	<b>≥ 0.42</b>
Scratch Hardness (ASTM MOHS)	<b>7</b>

### Warranties

[1 Year Commercial Limited Warranty](#)

### Available Colorways

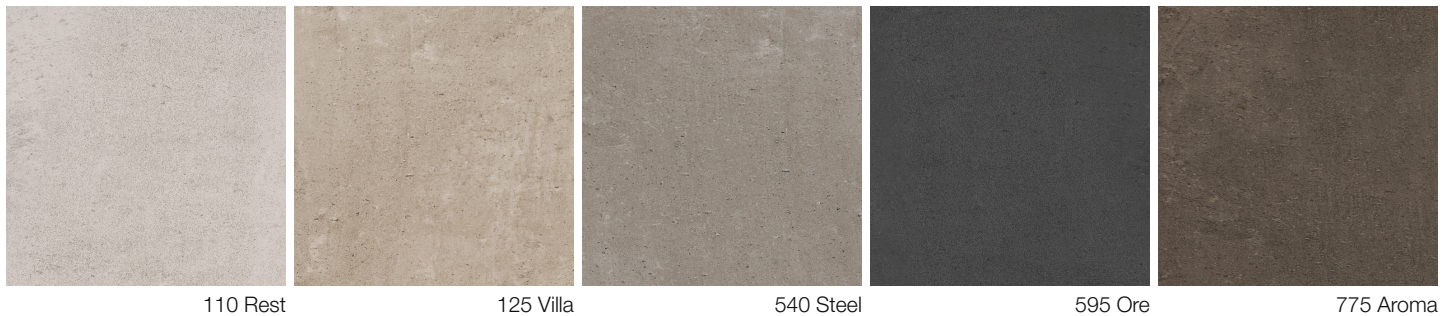

## Additional Information

---

Per ANSI A326.3, a DCOF of  $\geq 0.42$  is recommended for tiles in commercial applications. Tiles with a DCOF  $< 0.42$  are not recommended for wet or slippery areas. Contaminants like water, oil, or grease can increase slip risk—use caution when selecting products for such environments. For approved Areas of Application, please reference the chart above. For more information, visit [www.tcnatile.com](http://www.tcnatile.com).

Not for use on ramps.

Due to natural variation in ceramic and porcelain tile, final selection should be based on actual product samples.

[Ceramic Porcelain Step By Step Installation](#)  
[Maintenance Guidelines](#)

