
MODEL NUMBER:

2064.150.002 Single Control Lavatory Grid Drain. Chrome Finish.

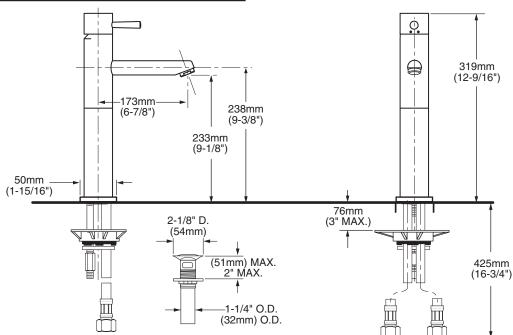

GENERAL DESCRIPTION:

Brass body. Washerless 35mm ceramic disc valve cartridge with integral hot limit safety stop. Braided flexible supply hoses with 3/8" compression connectors. 2.2 gpm/8.3L/min. maximum flow rate.

PRODUCT FEATURES:

Brass Construction: Durable. Easy to clean. Ideal for prolonged contact with water.

Ceramic Disc Valve Cartridge: Assures a lifetime of smooth handle operation and drip-free performance.

Adjustable Hot Limit Safety Stop: Limits the amount of hot water allowed to mix with cold. Reduces the risk of accidental scalding.

Low Lead: Meets NSF Standard 61/Section 9 & Prop 65 lead requirements.

Finish: Available in Polished Chrome

SUGGESTED SPECIFICATION:


Single control lavatory faucet shall feature a brass body and metal lever handle. Fitting shall be equipped with flexible supplies with 3/8" compression connectors. Shall also feature washerless ceramic disc valve cartridge with an integral hot limit safety stop. Fitting shall be American Standard Model # 2064.150.

MINIMALIST SINGLE CONTROL LAVATORY VESSEL FAUCET

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ANSI A117.1 ASME A112.18.1 CSA B 125 NSF 61/Section 9



| | | Finish |
|----------|---|--------------------|
| Product | | Polished Chrome |
| Number | Description | 002 |
| 2064.150 | Single Control Lavatory faucet with grid drain. | |

Meets the American Disabilities Act Guidelines and ANSI A117.1 Requirements for the physically challenged.