

American Standard



BARRIER FREE

PRINCETON™ RECESS BATH W/ LUXURY LEDGE AND INTEGRAL OVERFLOW

AMERICAST® BRAND ENGINEERED MATERIAL

PRINCETON™ RECESS BATH W/ LUXURY LEDGE AND INTEGRAL OVERFLOW

Americast® brand engineered material

- ☐ **2394.202 ICH** (Chrome Trim) Left Hand Outlet
- ☐ **2394.202 ICHTC** Same as above with Tub Cover
- ☐ **2395.202 ICH** (Chrome Trim) Right Hand Outlet
- ☐ **2395.202 ICHTC** Same as above with Tub Cover
- ☐ **2394.202 IPB** (Polished Brass Trim)
Left Hand Outlet
- ☐ **2394.202 IPBTC** Same as above with Tub Cover
- ☐ **2395.202 IPB** (Polished Brass Trim)
Right Hand Outlet
- ☐ **2395.202 IPBTC** Same as above with Tub Cover

- Lift and turn drain stopper assembly included with bath
- Escutcheon included and installed on bath
- Acid resistant porcelain finish
- Recess bath with integral apron and tiling flange
- Integral lumbar support
- Extra wide ledge for placement of toiletries
- Beveled headrest
- Full slip-resistant coverage
- End drain outlet

Nominal Dimensions:

1524 x 864 x 356mm
(60" x 34" x 14")

Bathing Well Dimensions:

1423 x 635 x 337mm
(56" x 25" x 13-1/4")

Compliance Certifications -

Meets or Exceeds the Following Specifications:


- ASME A112.19.4 for Americast Plumbing Fixtures
- ASTM F-462 for Slip-resistant Bathing Facilities
- ANSI Z124.1 Ignition Test
- ASTM E162 for Flammability
- NFPA 258 for Smoke Density

Americast® brand engineered material is a composition of porcelain bonded to enameling grade metal, bonded to a patented structural composite.



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES
AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND
USEABLE BUILDING FACILITIES-CHECK LOCAL CODES.
INSTALL WITH SEAT AT HEAD END.

SEE REVERSE FOR ROUGHING-IN DIMENSIONS
AND PRODUCT SPECIFICATIONS

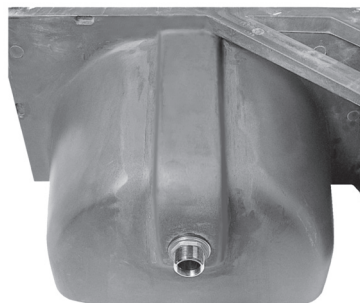

Photograph details integral overflow and drain assembly. Drain assembly included with bath.

To Be Specified:

- ☐ Color:
- ☐ Bath Faucet*:
- ☐ Faucet Finish:


*See faucet section for additional models available

American Standard



BARRIER FREE

PRINCETON™ RECESS BATH W/ LUXURY LEDGE AND INTEGRAL OVERFLOW

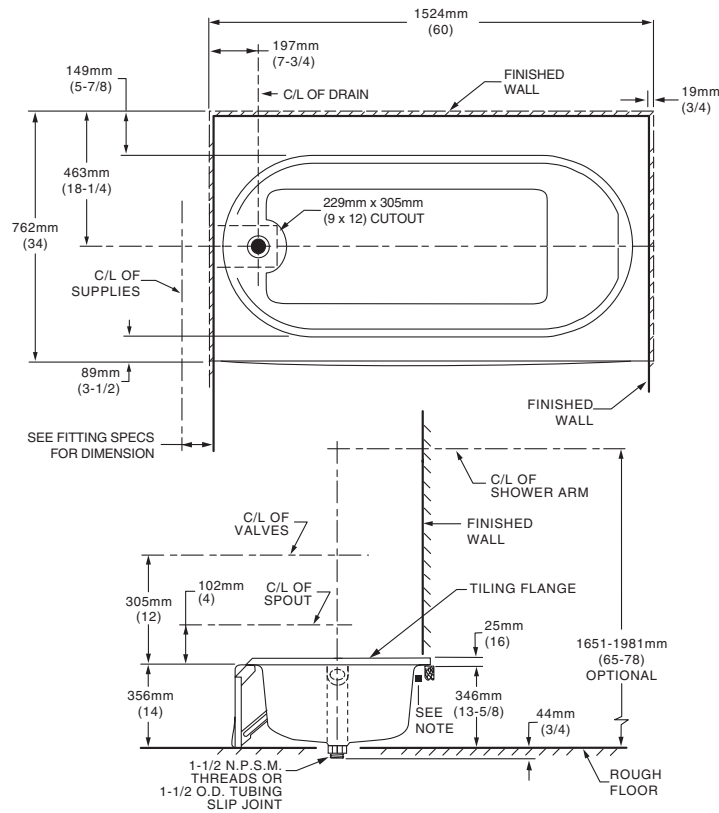


GENERAL SPECS FOR 2394/2395ICH, IPB BATHING POOL


INSTALLED SIZE	60 x 34 x 14 In. (1524 x 864 x 356mm)
WEIGHT	119 Lbs. (54 Kg.)
WEIGHT w/WATER	469 Lbs. (213 Kg.)
GAL. TO OVERFLOW	42 Gal. (159 L)
BATHING WELL AT SUMP	42 x 19 In. (1067 x 483mm)
BATHING WELL AT RIM	56 x 25 In. (1423 x 635mm)
WATER DEPTH TO OVERFLOW	9-1/2 In. (241mm)
FLOOR LOADING (PROJECTED AREA)	33 Lbs./Sq.Ft. (159 Kgs./Sq.m)
PTS.	6.7
CUBE (FT ³)	20.3

Below is shown typical cross sections of the tub rim showing typical wall constructions.

WOOD STUDS



STEEL STUDS



51 x 102mm (2 x 4) WOOD STRINGER FULL LENGTH

NOTES:

LEFT HAND OUTLET SHOWN, RIGHT HAND REVERSE DIMENSIONS. (2395.202.ICH).

DRAIN AND OVERFLOW ESCUTCHEON INCLUDED WITH BATH. REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH BATH FOR DRAIN INSTALLATION

BATH FAUCET NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH FITTING.

CONCEALED PIPING NOT FURNISHED.

PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORTS.

■ REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH BATH.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.4 These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet.