

SAVONA™ BIDET

- 5089.024** For deck-mounted fitting (illustrated)
 - Vitreous china
 - Flushing rim and vertical cleansing spray
 - Integral soap/sponge deck
 - Design-matched to Savona toilets
 - Integral overflow
 - Two bolt caps

Shown with 8391.000 Amarelis Bidet fitting with Lexington Handles 0000.902 (not included)

- 5089.052** For over-the-rim fitting
 - Vitreous china
 - Punched for single hole, over-the-rim fitting, less flushing rim and spray
 - Integral soap/sponge deck
 - Design-matched to Savona toilets
 - Integral overflow
 - Two bolt caps

Nominal Dimensions:

660 x 387 x 394mm
(26" x 15-1/4" x 15-1/2")

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- ASME A112.19.2M for Vitreous China Fixtures



SEE REVERSE FOR ROUGHING-IN DIMENSIONS


To Be Specified:

- Color:
- Bidet Fitting*:
- Fitting Finish:
- Trap:
- Supplies with Stops:

* See faucet section for additional models available

5089.024

For Deck-Mounted Fitting Variation

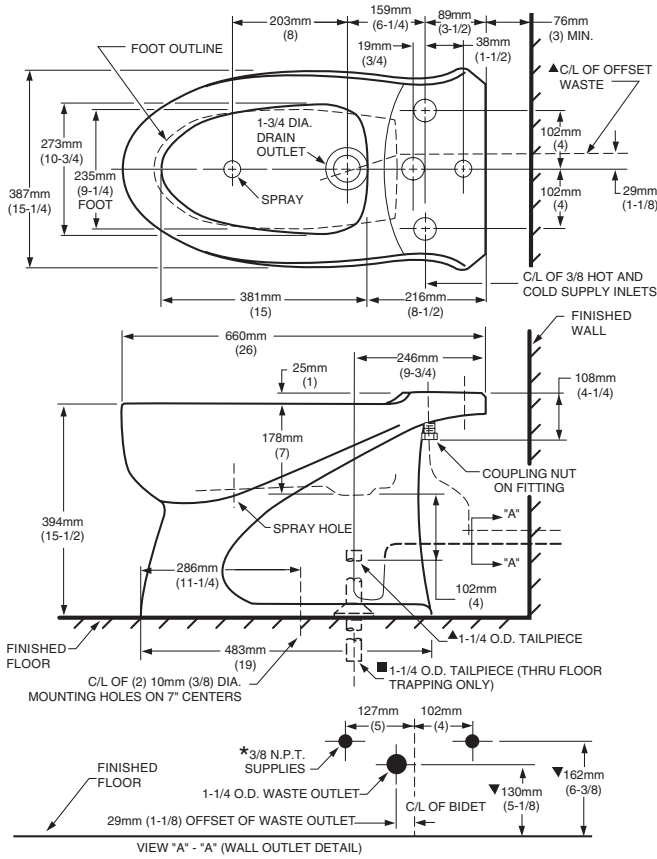

NOTES:

* 3/8 N.P.T. x 3/8 O.D. COMP. SUPPLIES, LESS VERTICAL RISERS (SUPPLIED BY OTHERS).

THIS INSTALLATION REQUIRES A TRUE 1-1/4" BODIED "P" TRAP, A UNIVERSAL 1-1/4--1-1/2 IS NOT APPLICABLE.


- ▲ WALL OUTLET INSTALLATION. DRAIN TAILPIECE MUST BE CUT TO 1-5/8 LG.
- ▼ DIMENSIONS SHOWN FOR LOCATION OF "P" TRAP ARE SUGGESTED.
- THRU FLOOR OUTLET INSTALLATION.

"P" TRAP AND FITTINGS NOT FURNISHED WITH BIDET AND MUST BE ORDERED SEPARATELY. BIDET FITTING HAS TRANSFER VALVE FEATURE.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet.

5089.052

For Over-the-Rim Fitting Variation

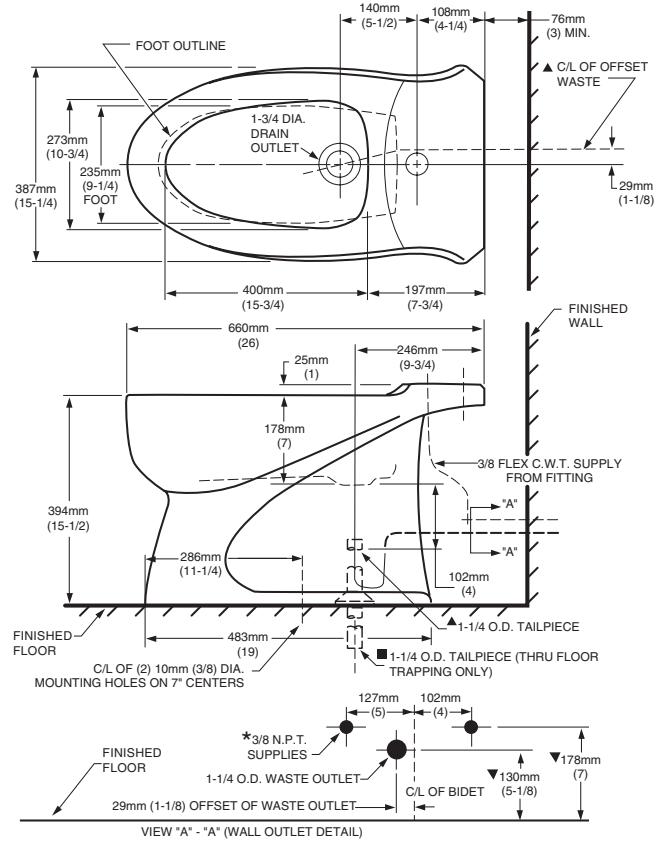

NOTES:

* 3/8 N.P.T. x 3/8 O.D. COMP. SUPPLIES, LESS VERTICAL RISERS (SUPPLIED BY OTHERS).

THIS INSTALLATION REQUIRES A TRUE 1-1/4" BODIED "P" TRAP, A UNIVERSAL 1-1/4--1-1/2 IS NOT APPLICABLE.

- ▲ WALL OUTLET INSTALLATION. DRAIN TAILPIECE MUST BE CUT TO 1-5/8 LG.
- ▼ DIMENSIONS SHOWN FOR LOCATION OF "P" TRAP ARE SUGGESTED.
- THRU FLOOR OUTLET INSTALLATION.

"P" TRAP AND FITTINGS NOT FURNISHED WITH BIDET AND MUST BE ORDERED SEPARATELY. BIDET FITTING HAS TRANSFER VALVE FEATURE.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet.