

*American Standard*

 **BARRIER FREE**

# YORKVILLE™ 16-1/8" ELONGATED PRESSURE-ASSISTED TOILET

VITREOUS CHINA

## YORKVILLE™ 16-1/8" ELONGATED PRESSURE-ASSISTED TOILET

- 2325.101**
  - Vitreous china
  - Low-consumption (6.0 Lpf/1.6 gpf)
  - **Floor-mounted, back-outlet toilet**
  - Elongated 16-1/8" high bowl
  - Pressure-assisted siphon jet flush action
  - Side-mounted chrome trip lever
  - Close-coupled flushometer tank\*
  - Speed Connect™ tank/bowl coupling system
  - 4 bolt caps
  - Fully glazed 2" ballpass trapway
  - 10" x 12" water surface area
  - 100% factory flush tested
- 3125.016** Elongated 16-1/8" high bowl with four bolt caps and two floor screws
- 4099.100** Flushometer tank complete with coupling components

### Component parts:

- 735084-400** Tank cover (specify color)

### Nominal Dimensions:

819 x 495 x 803mm  
(32-1/4" x 19-1/2" x 31-5/8")

### Alternate Configurations:

- 4099.700** Tank and tank cover only with tank cover locking device
- 4099.800** Tank and tank cover only with right hand trip lever

Fixture only, seat and supply by others

Recommended working pressure range 20 psi - 80psi

### Compliance Certifications -

#### Meets or Exceeds the Following Specifications:

- ASME A112.19.2 for Vitreous China Fixtures


#### To Be Specified:

- Color:
- Seat: American Standard #5324.019 Elongated "Rise and Shine" (with easy to clean lift-off hinge system) solid plastic closed front seat with cover.
- Seat: American Standard #5325.024 Elongated "Rise and Shine" (with easy to clean lift-off hinge system) solid plastic open front seat with cover.
- Alternate Seat:
- Supply with Stop:

\* Flushmate III tank system by Flushmate® Div. of Sloan Valve Co



Replaces 2325.100

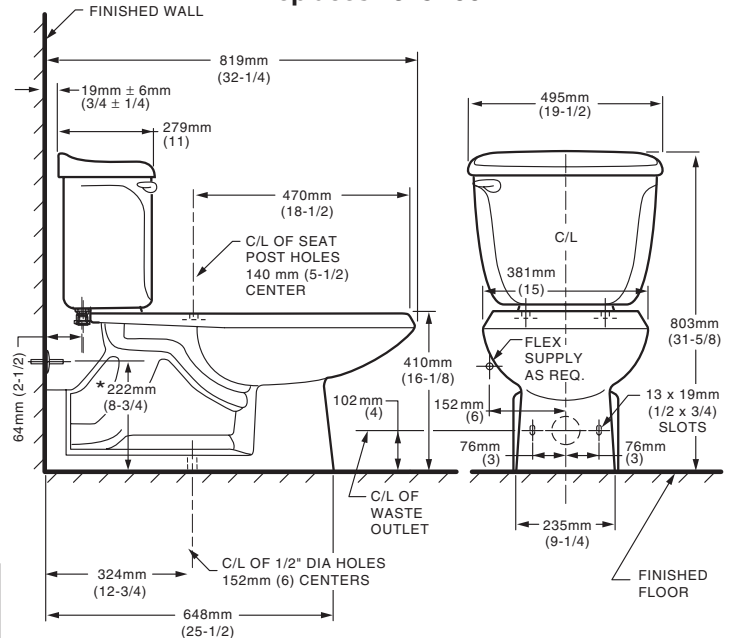

**NOTES:**  
**WASTE OUTLET SEAL RING MUST BE NEOPRENE OR GRAPHITE-FELT (WAX RING NOT RECOMMENDED). SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.**  
\* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED. FOR ADDITIONAL INFORMATION REFER TO INSTALLATION INSTRUCTIONS SUPPLIED.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.



**MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USABLE BUILDING FACILITIES-CHECK LOCAL CODES.**

M43