

American Standard



BARRIER FREE

MADERA™ 17"H ELONGATED FLUSH VALVE TOILET

VITREOUS CHINA

MADERA™ 17"H ELONGATED 10" ROUGH

- Vitreous china
- Low-consumption (6.0 Lpf/1.6 gpf)
- 10" roughing-in
- 17" rim height
- Elongated bowl
- Direct-fed siphon jet action
- Fully glazed 2" ballpass trapway
- 11" x 13" water surface area
- 1-1/2" top spud
- 2 bolt caps
- 100% factory flush tested

☐ **3043.102** Top spud

☐ **3043.156** Top spud with slotted rim for bedpan holding (white only)

Nominal Dimensions:

765 x 381 x 438mm (30-1/8" x 15" x 17-1/4")

Recommended working pressure--between
25 psi at valve when flushing and 80 psi
static

Fixture only, less seat and bolt caps

Compliance Certifications -

Meets or Exceeds the Following Specifications:


- ASME A112.19.2M (and 19.6M) for Vitreous China Fixtures - includes Flush Performance, Ball Pass Diameter, Trap Seal Depth and all Dimensions

To Be Specified

- ☐ Color: ☐ White ☐ Bone ☐ Silver ☐ Black
- ☐ Shell
- ☐ Seat: Olsonite #95 open front seat less cover
- ☐ Seat: Church #9500C open front seat less cover
- ☐ Alternate Seat:
- ☐ Flush Valve: Sloan Royal #111
- ☐ Alternate Flush Valve:



● When installed so top of seat is 432 to 483mm (17" to 19") from the finished floor.
MEETS THE AMERICAN DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USEABLE BUILDING FACILITIES- CHECK LOCAL CODES.

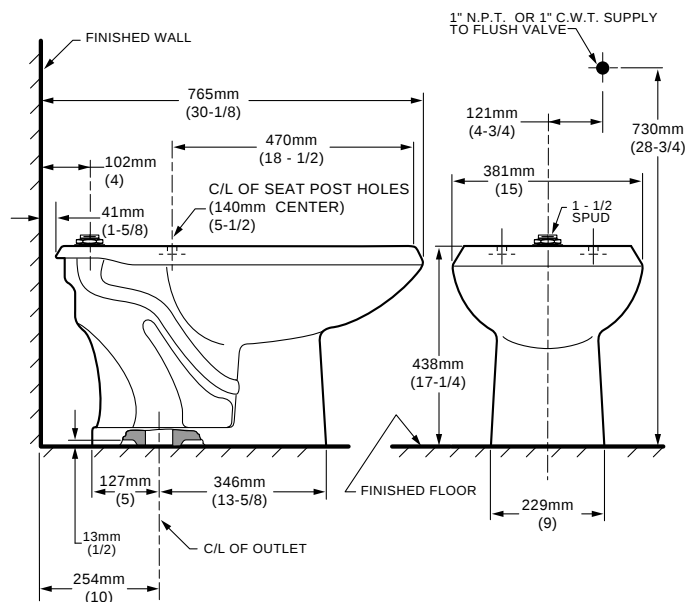

NOTES:

PRODUCT 3043.102 SHOWN, 3043.156 SAME AS EXCEPT WITH SLOTTED RIM FOR BED PAN HOLDING.
THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 254MM (10") FROM FINISHED WALL TO C/L OF OUTLET.
TO COMPLY WITH AREA CODE GOVERNING THE HEIGHT OF VACUUM BREAKER ON FLUSH VALVE, THE PLUMBER MUST VERIFY DIMENSIONS SHOWN FOR SUPPLY ROUGH-IN.
FLUSH VALVE NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2.
These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

SPS 3043

COM/INS-005