


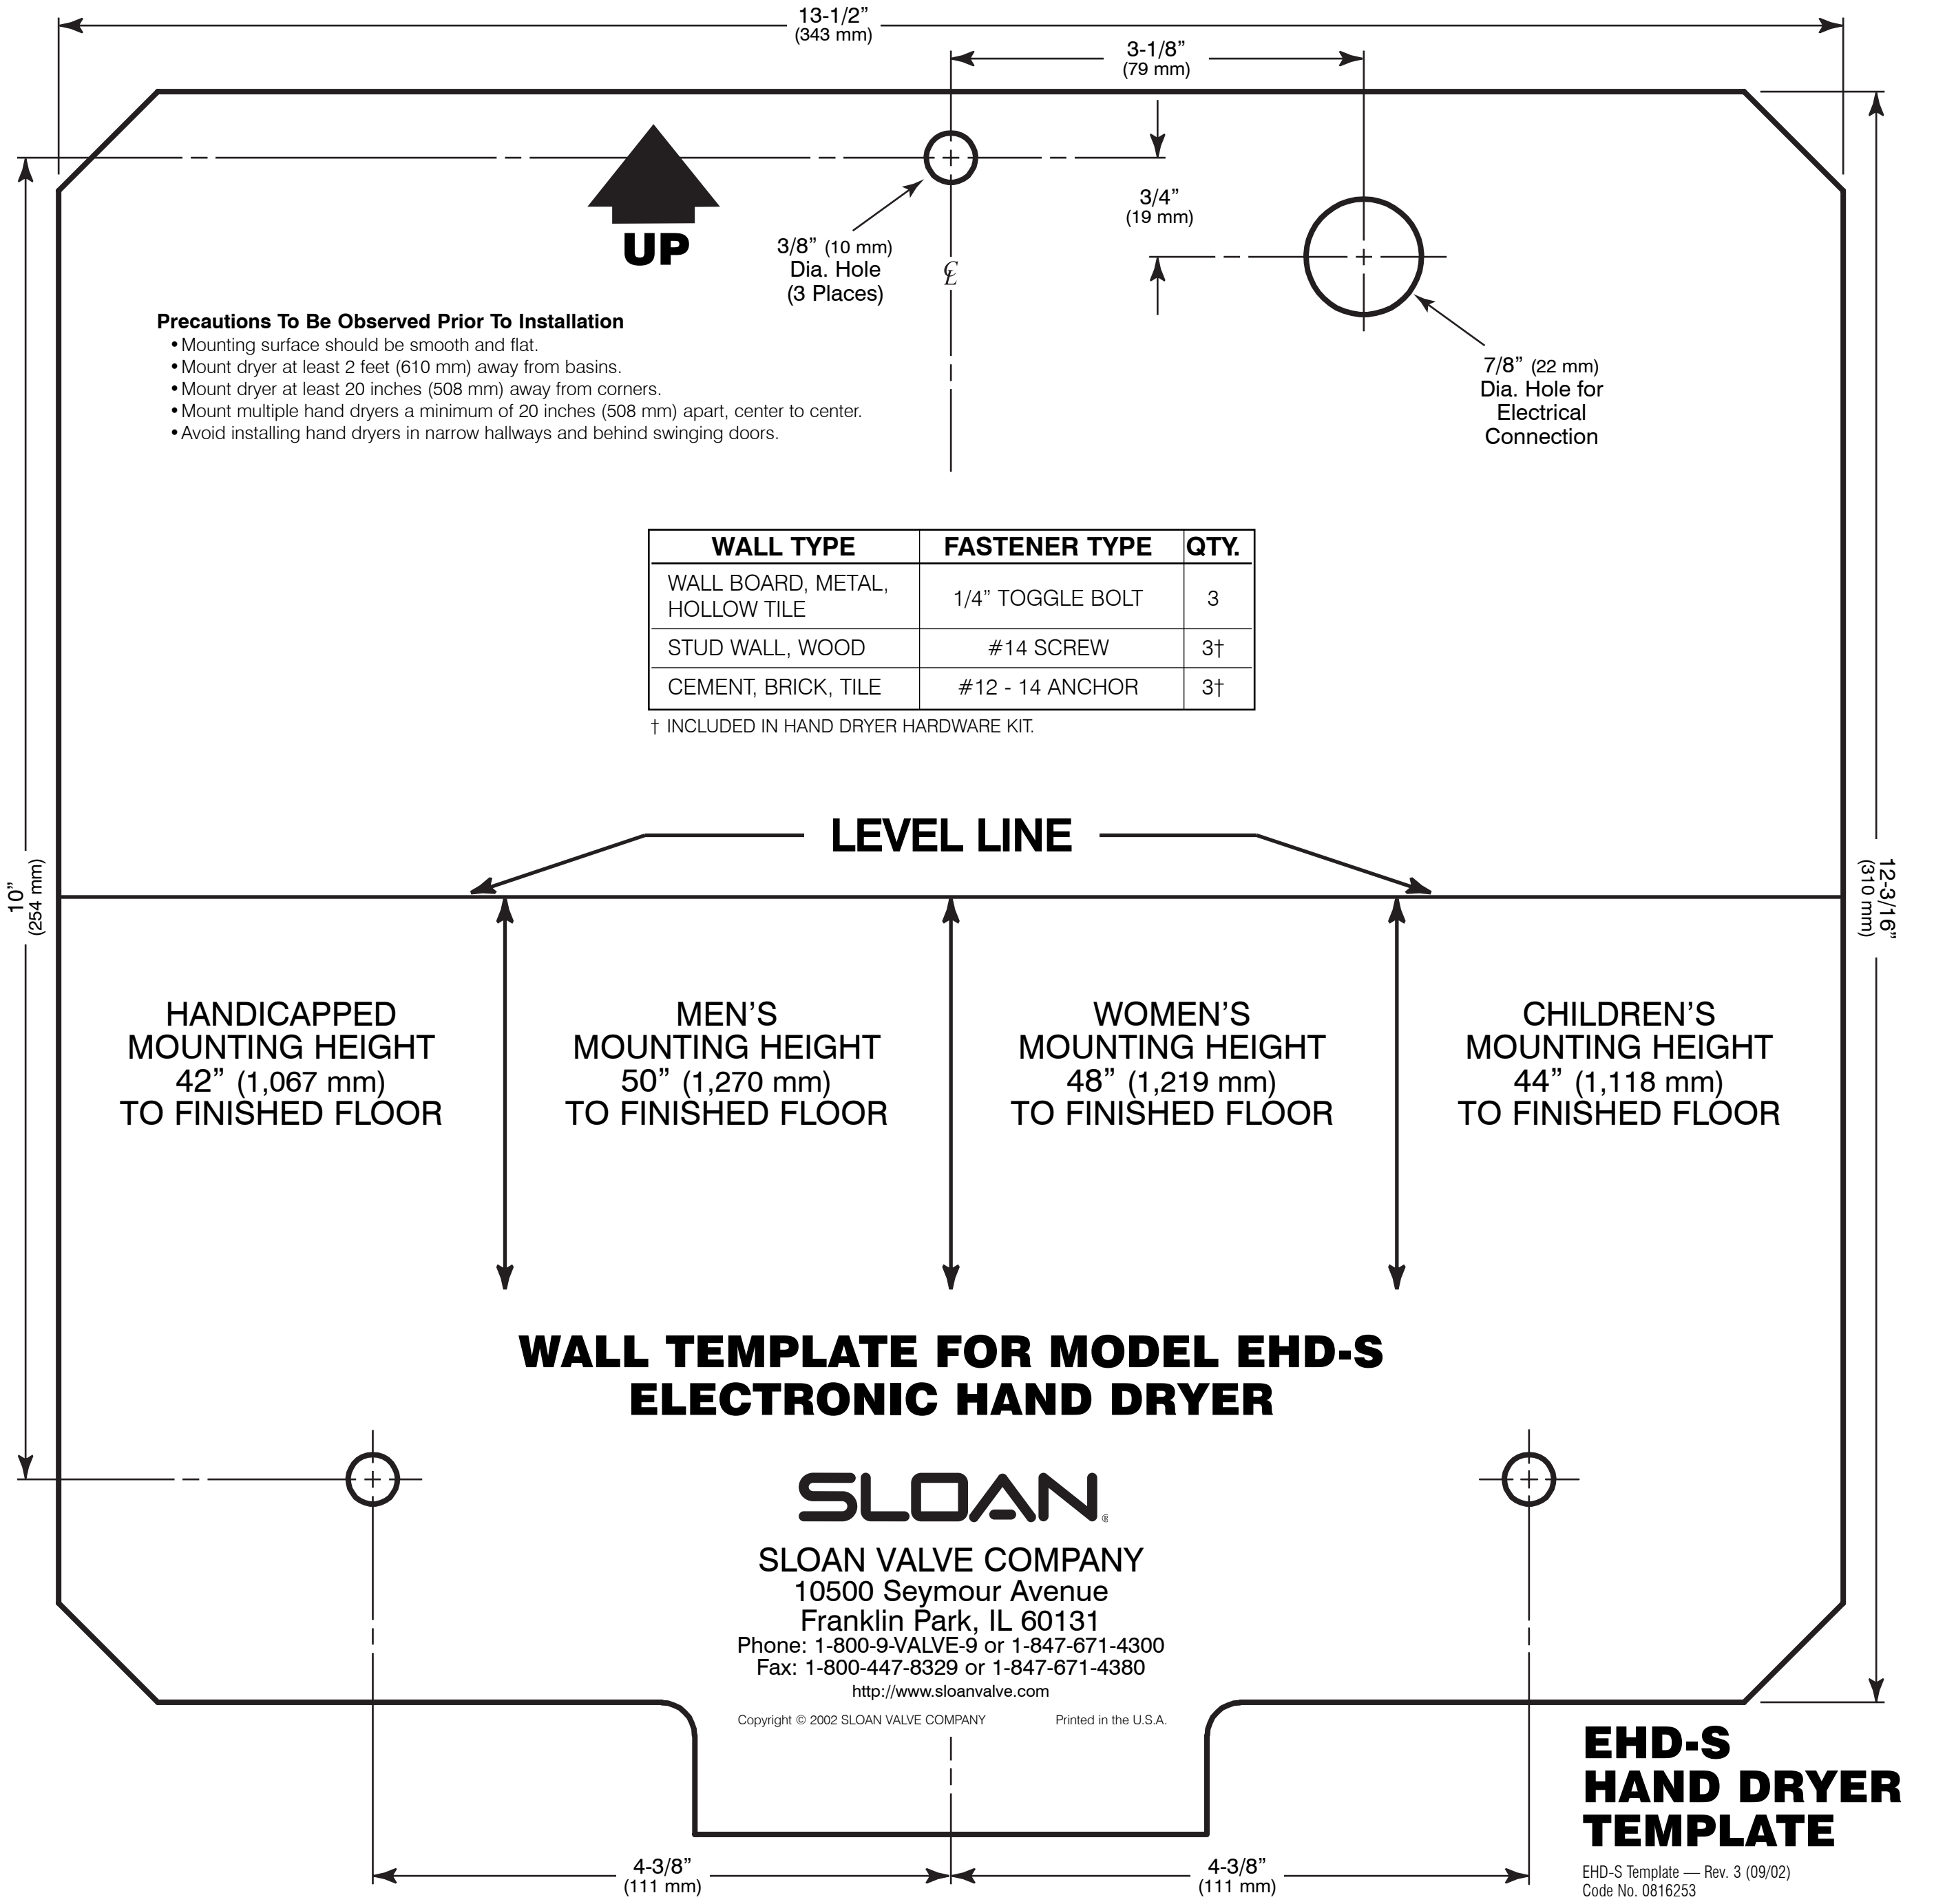

Precautions To Be Observed Prior To Installation

- Mounting surface should be smooth and flat.
- Mount dryer at least 2 feet (610 mm) away from basins.
- Mount dryer at least 20 inches (508 mm) away from corners.
- Mount multiple hand dryers a minimum of 20 inches (508 mm) apart, center to center.
- Avoid installing hand dryers in narrow hallways and behind swinging doors.

WALL TYPE	FASTENER TYPE	QTY.
WALL BOARD, METAL, HOLLOW TILE	1/4" TOGGLE BOLT	3
STUD WALL, WOOD	#14 SCREW	3†
CEMENT, BRICK, TILE	#12 - 14 ANCHOR	3†

† INCLUDED IN HAND DRYER HARDWARE KIT.

LEVEL LINE

HANDICAPPED
MOUNTING HEIGHT
42" (1,067 mm)
TO FINISHED FLOOR

MEN'S
MOUNTING HEIGHT
50" (1,270 mm)
TO FINISHED FLOOR

WOMEN'S
MOUNTING HEIGHT
48" (1,219 mm)
TO FINISHED FLOOR

CHILDREN'S
MOUNTING HEIGHT
44" (1,118 mm)
TO FINISHED FLOOR

**WALL TEMPLATE FOR MODEL EHD-S
ELECTRONIC HAND DRYER**

SLOAN®

SLOAN VALVE COMPANY
10500 Seymour Avenue
Franklin Park, IL 60131

Phone: 1-800-9-VALVE-9 or 1-847-671-4300
Fax: 1-800-447-8329 or 1-847-671-4380

<http://www.sloanvalve.com>

Copyright © 2002 SLOAN VALVE COMPANY

Printed in the U.S.A.

**EHD-S
HAND DRYER
TEMPLATE**

EHD-S Template — Rev. 3 (09/02)
Code No. 0816253