


**LAVATORY FAUCET  
K-14616-4**

**ADA**

**Features**

- Brass construction
- Single-hole mounting
- One-piece, self-contained ceramic disc valve allows both volume and temperature control
- Temperature memory allows faucet to be turned on and off at any temperature setting
- 2 gallons (7.5 L) per minute
- Lower flow aerator options are available (refer to the Kohler Price Book)
- Pop-up drain with lift rod and tailpiece
- Lever handle
- Optional escutcheon plate available
- 4-3/8" (11.1 cm) spout

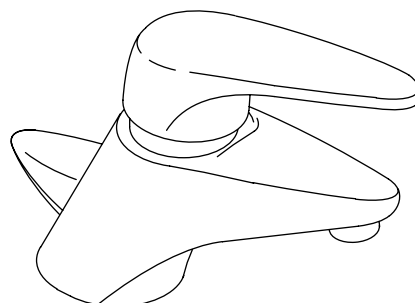

**Codes/Standards Applicable**


Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- IAPMO/UPC
- Energy Policy Act of 1992 (EPACT)
- ADA

**Colors/Finishes**

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

**Specified Model**

| Model                       | Description  | Colors/Finishes   |                                     |
|-----------------------------|--|---|-------------------------------------|
| K-14616-4                   | Lavatory faucet with single control and drain                          | <input type="checkbox"/> CP   | <input type="checkbox"/> Other ____ |
| <b>Optional Accessories</b> |  |  |                                     |
| K-14531                     | 6" (15.2 cm) escutcheon plate for 4" (10.2 cm) centerset installations | <input type="checkbox"/> CP   | <input type="checkbox"/> Other ____ |


**Product Specification**

Single-control lavatory faucet shall be of brass construction. Valve shall be a one-piece, self-contained ceramic disc valve, allowing both volume and temperature control. Valve shall feature temperature memory, allowing the faucet to be turned on and off at any temperature setting. Faucet shall include single-hole mounting, 4-3/8" (11.1 cm) spout, pop-up drain with lift rod and tailpiece, and lever handle. Faucet shall be rated at 2 gallons (7.5 L) per minute. Faucet shall have lower flow aerator options. Faucet shall be Kohler Model K-14616-4-\_\_\_\_\_.

# CABRIOLE™

## Installation Notes

Install this product according to the installation guide.

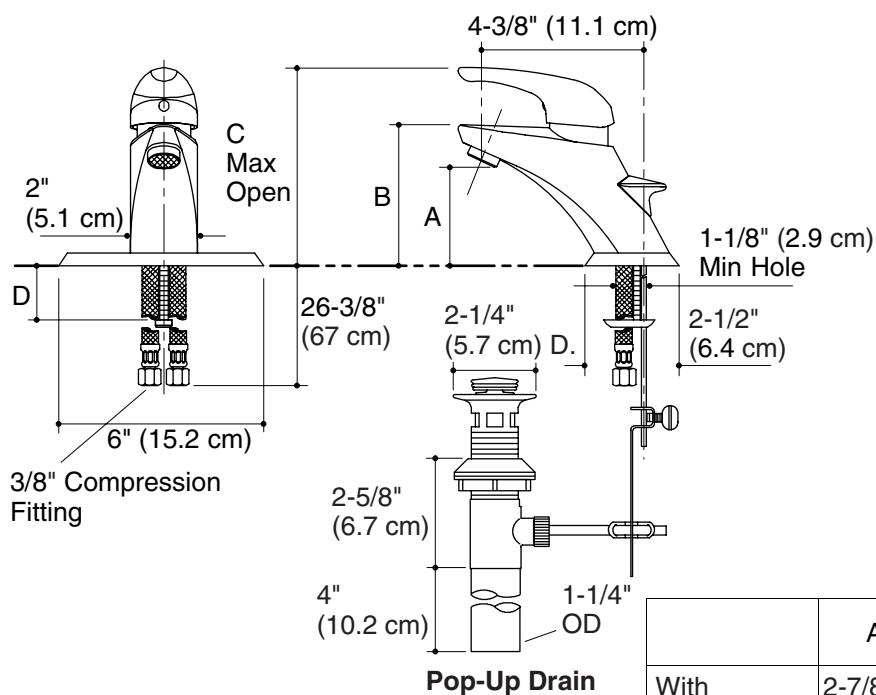

|  | A               | B                | C                | D                   |
|--|-----------------|------------------|------------------|---------------------|
| With Escutcheon  | 2-7/8" (7.3 cm) | 4-1/8" (10.5 cm) | 6-3/4" (17.1 cm) | 1-5/8" (4.1 cm) Max |
| Without Escutcheon   | 2-1/2" (6.4 cm) | 3-3/4" (9.5 cm)  | 6-3/8" (16.2 cm) | 2" (5.1 cm) Max     |
| Escutcheon to be used with 4" (10.2 cm) hole centers only. |                 |                  |                  |                     |

## Product Diagram