

FOUNTAINHEAD_{TM}

Features


- Brass construction
- One-piece, self-contained ceramic disc joystick valve actuation allows both volume and temperature control
- Single-hole mounting
- 2.2 gpm (8.3 lpm) flow rate
- Flexible connections for easy installation
- Single-control
- ADA compliant lever handle
- · Includes installation hardware

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ASME A112.18.1/CSA B125.1
- NSF 61
- Energy Policy Act of 1992
- IAPMO/cUPC

WALL-MOUNT LAVATORY FAUCET K-2443



Colors/Finishes

· CP: Polished Chrome

Accessories:

F34: Blanche MapleF35: Truffle Ash

Specified Model

Model	Description			Colors/Finishes
K-2443-4	Wall-mount lavatory faucet with lever handle			□СР
Required	Accessories			
K-2432	Fountainhead wall storage with faucet hole OR		□ F34	□ F35
K-2434	Fountainhead wall storage with faucet hole and media insert OR		□ F34	□ F35
K-2440	Fountainhead shelf		□ F34	□ F35
Recomme	ended Accessories			'
Recomme K-2435	ended Accessories Fountainhead™ 21" (53.3 cm) vanity		□ F34	□ F35
			□ F34 □ F34	□ F35
K-2435	Fountainhead™ 21" (53.3 cm) vanity			
K-2435 K-2436	Fountainhead™ 21" (53.3 cm) vanity Fountainhead™ 69" (175.3 cm) vanity	□ CP	□ F34	□ F35
K-2435 K-2436 K-2437	Fountainhead™ 21" (53.3 cm) vanity Fountainhead™ 69" (175.3 cm) vanity Fountainhead™ 60" (152.4 cm) double vanity	□ CP	□ F34	□ F35

Product Specification


Single-control lavatory faucet shall be of brass construction. Faucet shall feature a one-piece, self-contained ceramic disc joystick valve actuation which allows for both volume and temperature control. Faucet shall feature single-hole mounting installation and flow rate of 2.2 gallons (8.3 liters) per minute. Faucet shall include flexible connections for easy installation, mounting hardware, and ADA compliant lever handle. Lavatory faucet shall be Kohler Model K-2443-4-_____.

USA: 1-800-4-KOHLER Canada: 1-800-964-5590 kohler.com

FOUNTAINHEAD_{TM}

Installation Notes

Install this product according to the installation guide.

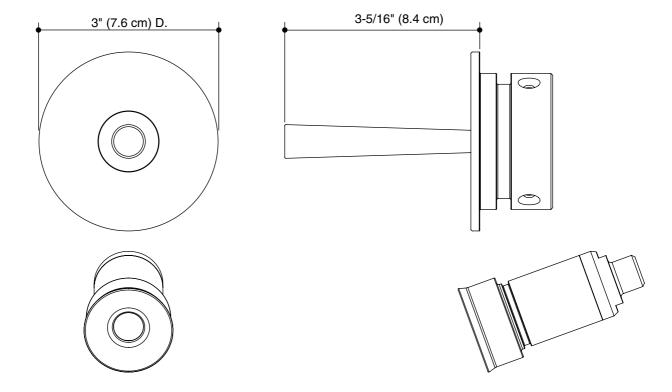

Product Diagram

