


BATH WHIRLPOOL K-1257-CB

Features

- Acrylic
- 1.25 hp pump with air switch and grounding-type plug-in cord
- 6 individually adjustable multi-directional hydro-massage jets
- Optional K-1283 front apron
- Optional K-1491 removable bath pillow
- Optional K-9696 whirlpool trim kit in various finishes
- Optional K-1717 20-minute ProFlex® timer kit
- 72" (182.9 cm) x 36" (91.4 cm) x 20" (50.8 cm)

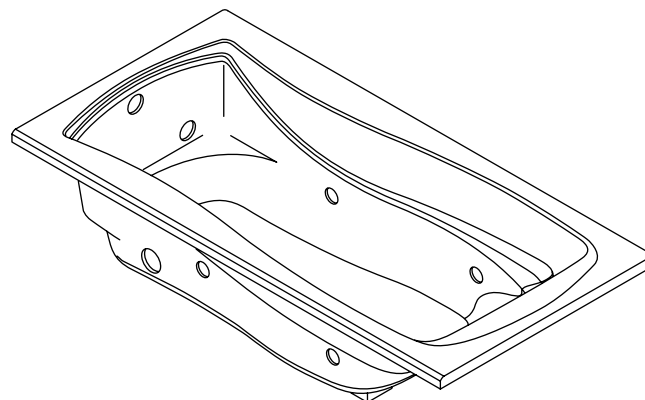

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- ASME A112.19.7M
- IAPMO/UPC
- Underwriters Laboratories (UL)

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories:

- 0: White
- CP: Polished Chrome
- PB: Polished Brass
- NA: None applicable
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes
K-1257-CB	Bath whirlpool, drop-in rim style, custom pump	<input type="checkbox"/> 0 <input type="checkbox"/> Other_____

Recommended Accessories

K-7166-AF	Drain	<input type="checkbox"/> CP <input type="checkbox"/> PB <input type="checkbox"/> Other_____
-----------	-------	---

Optional Accessories

K-1283	Apron (removable)	<input type="checkbox"/> 0			<input type="checkbox"/> Other_____	
K-1491	Pillow	<input type="checkbox"/> 0			<input type="checkbox"/> Other_____	
K-1717	20-minute ProFlex® timer kit					<input type="checkbox"/> NA
K-9696	Jet trim kit		<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____	

Product Specification

The acrylic bath whirlpool shall be 72" (182.9 cm) in length, 36" (91.4 cm) in width, and 20" (50.8 cm) in height. The bath whirlpool shall have 6 individually adjustable multi-directional hydro-massage jets, a 1.25 hp pump with air switch, and grounding-type plug-in cord. The bath whirlpool shall have an optional K-1283 removable front apron, an optional K-1491 removable bath pillow, an optional K-1717 20-minute ProFlex® timer kit, and an optional K-9696 jet trim kit. The bath whirlpool shall be Kohler Model K-1257-CB-_____.

MARIPOSA®

Technical Information

Fixture*:				
Basin area:				
Bathing well	50" (127 cm) x 24" (61 cm)			
Top area	65" (165.1 cm) x 27" (68.6 cm)			
To overflow:				
Water depth	14" (35.6 cm)			
Capacity	72 gal (272.5 L)			
Weight	110 lbs (49.9 kg)			
Drop-in cut-out	70" (177.8 cm) x 34" (86.4 cm)			
* Approximate measurements for comparison only.				
Pump:	Hp	V	Hz	A
1-speed	1.25	120	60	7.5

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):

Pump/control 120 V, 15 A, 60 Hz


Locate the outlet behind the whirlpool and within 24" (61 cm) of the pump.

Installation Notes

Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 41 lbs/square foot (200 kg/square meter) loading.

The apron must be installed before the finished floor and wall materials are installed.

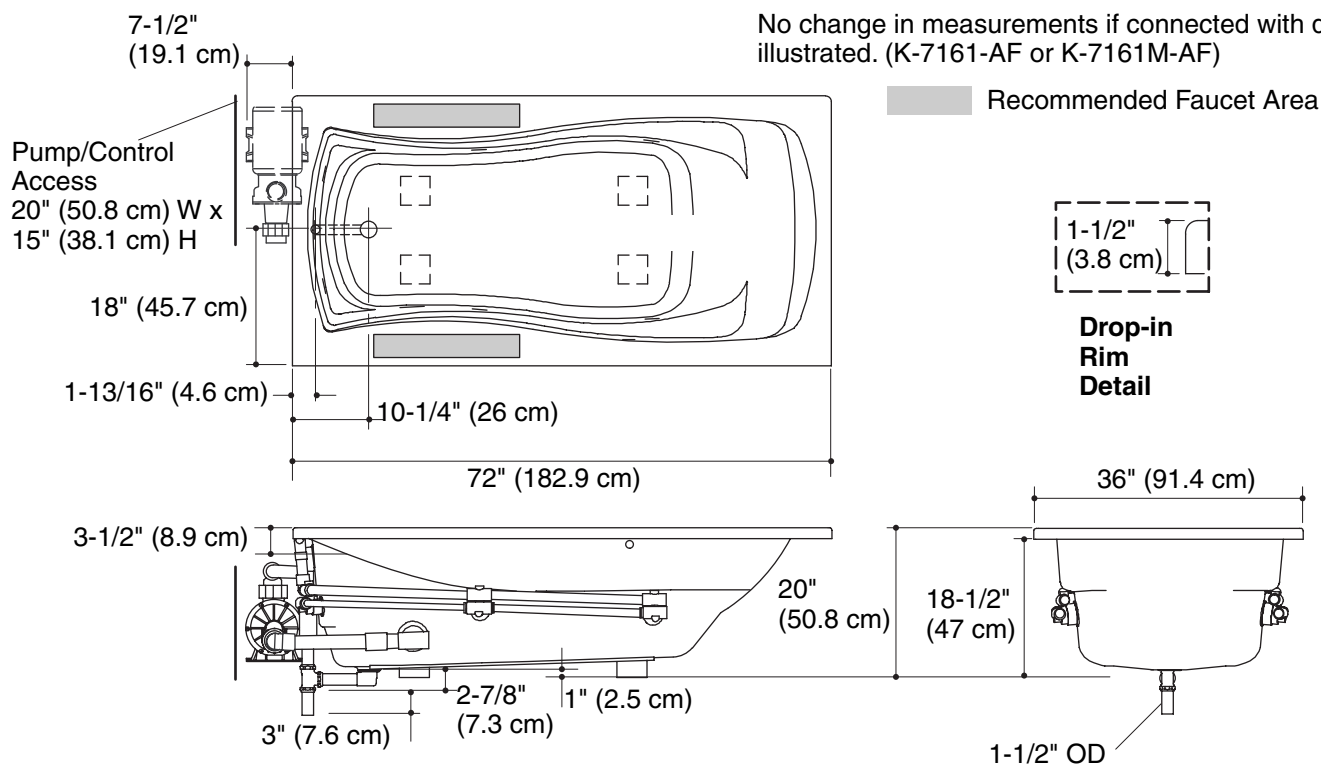

Product Diagram