


Features

- Acrylic grab bars
- 3-wall alcove
- 5 individually adjustable ProFlex® hydro-massage jets
- 1.25 hp pump with air switch and grounding-type plug-in cord
- Center drain outlet
- Integral soap ledges
- Stylish round apron front
- Optional K-9695 metal finish 5 jet trim kit
- Optional K-1717 ProFlex® 20-minute timer kit
- Fiberglass (FRP)
- Molded-in floor texture
- Spacious oval bathing well
- Tile-look walls
- 60" (152.4 cm) x 42-1/2" (108 cm) x 76" (193 cm)

FRP BATH AND SHOWER WHIRLPOOL MODULE K-1635 ALSO K-1635-CK

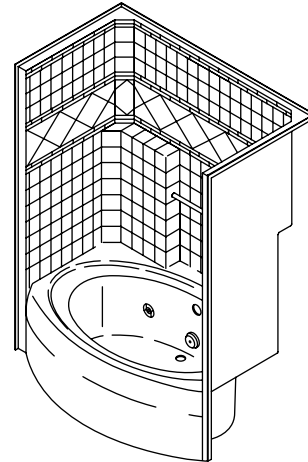

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.7M
- ANSI Z124.1.2
- IAPMO/UPC
- Underwriters Laboratories (UL)

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- NA: None applicable
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-1635	Bath and shower whirlpool module, right-hand pump	☐ 0	☐ Other_____
K-1635-CK	Bath and shower whirlpool module, left-hand pump	☐ 0	☐ Other_____

Recommended Accessories				
K-7161-AF	Pop-up drain	☐ CP	☐ PB	☐ Other_____

Optional Accessories			
K-1491	Pillow	☐ 0	☐ Other_____

Product Specification

The bath and shower whirlpool module shall be 60" (152.4 cm) in length, 42-1/2" (108 cm) in width, and 76" (193 cm) in height. The bath and shower whirlpool module shall be made of fiberglass (FRP), with right-hand or left-hand pump. The bath and shower whirlpool module shall have 5 individually adjustable ProFlex® hydro-massage jets, a 1.25 hp pump with air switch and grounding-type plug-in cord, spacious oval bathing well, stylish round apron front, tile-look walls, molded-in floor texture, center drain outlet, acrylic grab bar, and integral soap ledges. The bath and shower whirlpool module shall have an optional K-1491 removable pillow, an optional K-1717 20-minute timer kit, an optional K-1601 Footstop, and an optional K-9695 jet trim kit. The bath and shower whirlpool module shall be Kohler Model K-1635-_____-_____.

TERRACINA®

Optional Accessories

K-1601	Footstop	☐ 0	☐ Other_____
K-1717	20-minute timer kit		☐ NA
K-9695	Jet trim kit (metal finishes)	☐ CP ☐ PB	☐ Other_____

Technical Information

Fixture*:	
Basin area:	
Bathing well	43" (109.2 cm) x 28" (71.1 cm)
Top area	52" (132.1 cm) x 32" (81.3 cm)
To overflow:	
Water depth	13" (33 cm)
Capacity	55 gal (208.2 L)
Weight	225 lbs (102.1 kg)
* Approximate measurements for comparison only.	

Pump:	Hp	V	Hz	A
1-speed	1.25	120	60	7.5

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):

Pump/control 120 V, 15 A, 60 Hz

Locate the outlet behind the whirlpool and within 24" (61 cm) of the pump.

Installation Notes

Install this product according to the installation guide.


Position the valving and shower fittings where they will complement the tile-wall appearance of the module.

Fixture not drilled for supply fittings.

Shimming is required to level fixture.

Floor support under whirlpool must provide for a minimum of 40 lbs/square foot (196 kg/square meter) loading.

No change in measurements if connected with drain illustrated. (K-7161-AF)

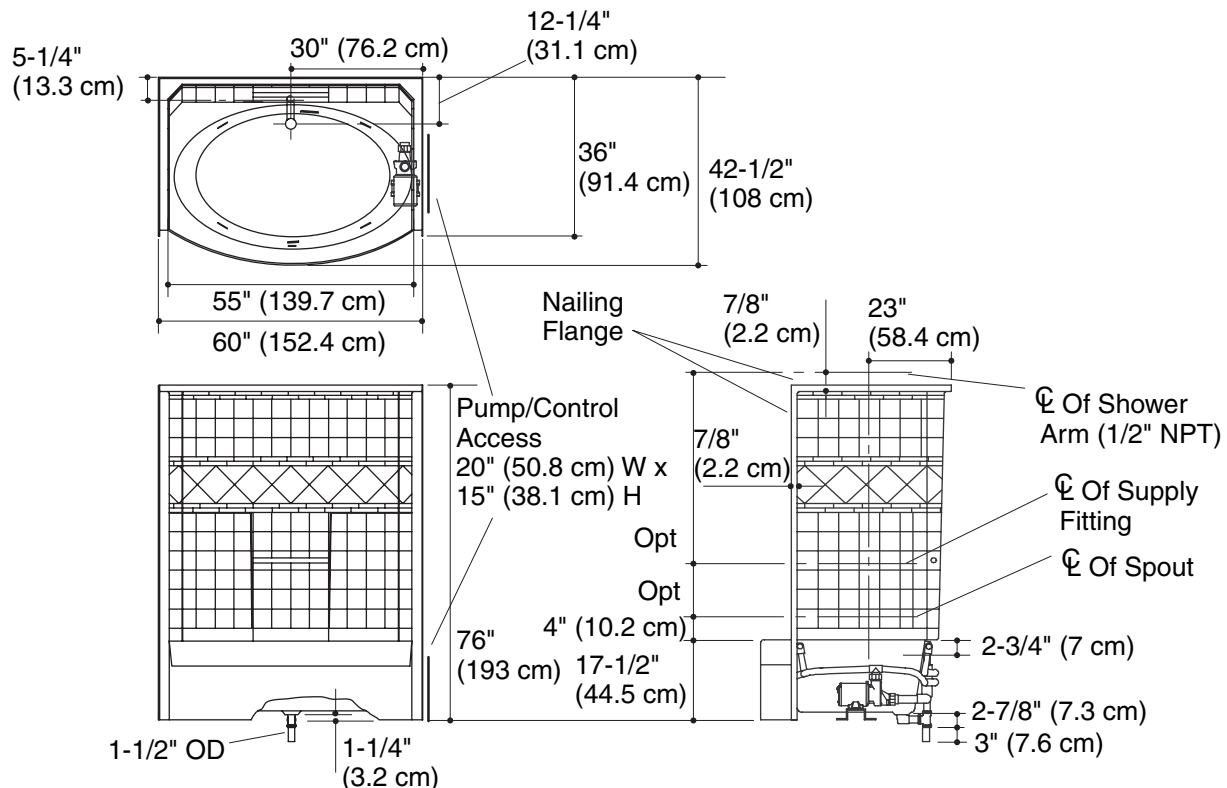

Product Diagram

TERRACINA® FRP BATH AND SHOWER WHIRLPOOL MODULE

Page 2 of 2
1014747-4-B

THE BOLD LOOK
OF **KOHLER**®