

KOHLER®

Roughing-In

K-1209-CB

HOURGLASS® 32

ACRYLIC CUSTOM BATH WHIRLPOOL

Product Information

Applicable product:				
Bath whirlpool, drop-in, custom pump			K-1209-CB	
Recommended accessories:				
Drain			K-7161-AF	
Fixture*:				
Basin area:				
Bathing well	47" (119.4 cm) x 20" (50.8 cm)			
Top area	53" (134.6 cm) x 23" (58.4 cm)			
To overflow:				
Water depth	14-1/2" (36.8 cm)			
Capacity	64 gal (242.3 L)			
Weight	100 lbs (45.4 kg)			
Drop-in cut-out	58-1/2" (148.6 cm) x 30-1/2" (77.5 cm)			
* Approximate measurements for comparison only.				
Pump:	Hp	V	Hz	A
1-speed	1.25	120	60	7.5

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):

Pump/control 120 V, 15 A, 60 Hz

Locate the outlet behind the whirlpool and within 24" (61 cm) of the pump.

Installation Notes

Install this product according to the installation guide.


Floor support under whirlpool must provide for a minimum of 49 lbs/square foot (241 kg/square meter) loading.

If installing a rim-mount faucet, make sure there is no interference with the drain overflow and circulating system before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

The apron must be installed before the finished floor and wall materials are installed.

Pump must be relocated to custom position at the time of installation. Provide adequate clearance.

This fixture conforms to ANSI Standard Z124.1.2. All dimensions are nominal.

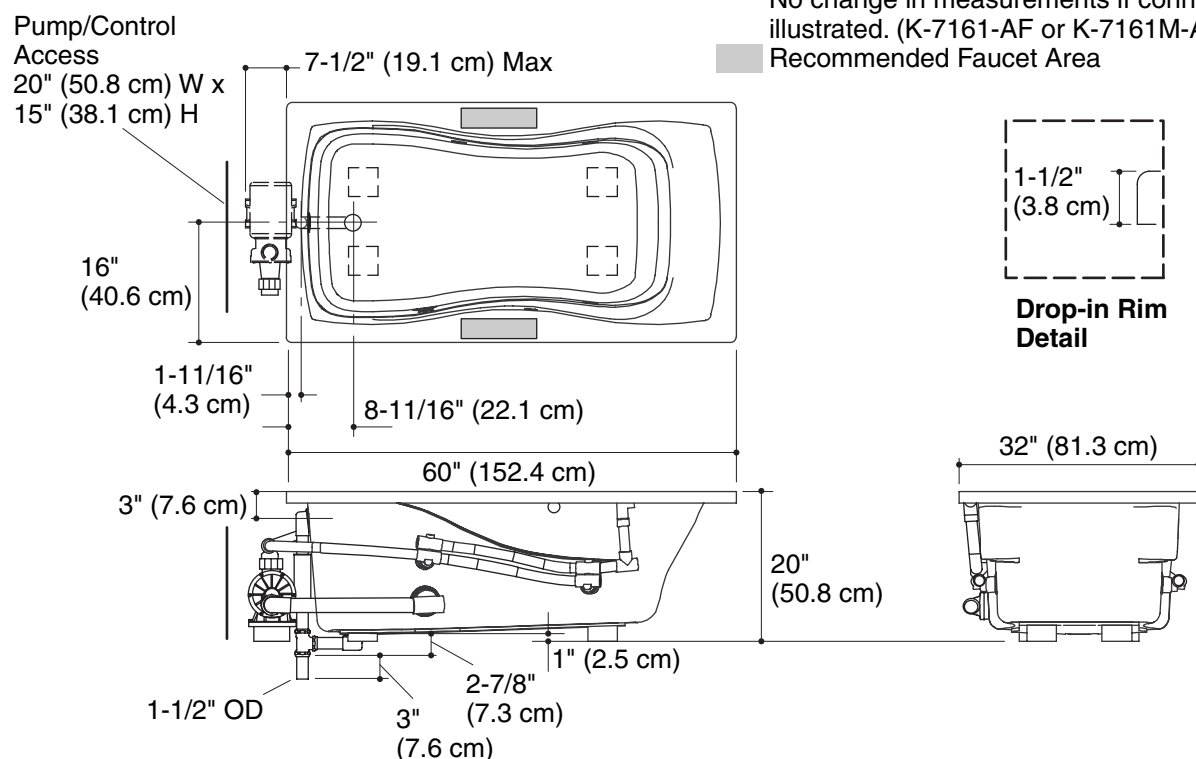

No change in measurements if connected with drain illustrated. (K-7161-AF or K-7161M-AF)

Recommended Faucet Area