

ACRYLIC BATH WHIRLPOOL K-1106-CN

ADA


Features

- Acrylic
- 1.25 hp pump with air switch and grounding-type plug-in cord
- 6 individually adjustable multi-directional hydro-massage jets
- Molded lumbar supports and armrests
- Drop-in rim style
- 60" (152.4 cm) x 32" (81.3 cm) x 18-1/8" (46 cm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ASME A112.19.7M
- ANSI Z124.1.2
- IAPMO/UPC
- Underwriters Laboratories (UL)

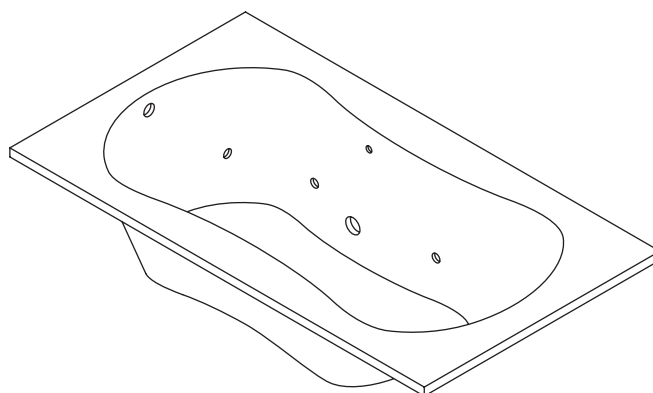

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories:

- 0: White
- CP: Polished Chrome
- PB: Polished Brass
- NA: None applicable

Specified Model

Model	Description	Colors/Finishes		
K-1106-CN	Bath whirlpool, drop-in rim style, custom pump	☐ 0	☐ Other_____	
Recommended Accessories				
K-11677	Drain	☐ CP	☐ PB	
Optional Accessories				
K-1284	Removable apron	☐ 0	☐ Other_____	
K-1717	20-minute timer kit			☐ NA

Product Specification

The acrylic bath whirlpool shall be 60" (152.4 cm) in length, 32" (81.3 cm) in width, and 18-1/8" (46 cm) in height. The bath whirlpool shall be drop-in rim style. The bath whirlpool shall have 6 individually adjustable multi-directional hydro-massage jets, a 1.25 hp pump with air switch and grounding-type plug-in cord. The bath whirlpool shall have molded lumbar supports and armrests. The bath whirlpool shall be Kohler Model K-1106-CN-_____.

PROFLEX® 6032

Technical Information

Fixture*:	
Basin area:	
Bathing well	46" (116.8 cm) x 20" (50.8 cm)
Top area	55" (139.7 cm) x 22" (55.9 cm)
To overflow:	
Water depth	12-1/2" (31.8 cm)
Capacity	49 gal (185.5 L)
Weight	49 lbs (22.2 kg)
Drop-in cut-out	58-1/2" (148.6 cm) x 30-1/2" (77.5 cm)
* Approximate measurements for comparison only.	

Pump:	Hp	V	Hz	A
1-speed	1.25	120	60	7.5

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):

Pump/control 120 V, 15 A, 60 Hz


Locate the outlet behind the whirlpool and within 24" (61 cm) of the pump.

Installation Notes


Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 36 lbs/square foot (178 kg/square meter) loading.

The apron must be installed before the finished floor and wall materials are installed.

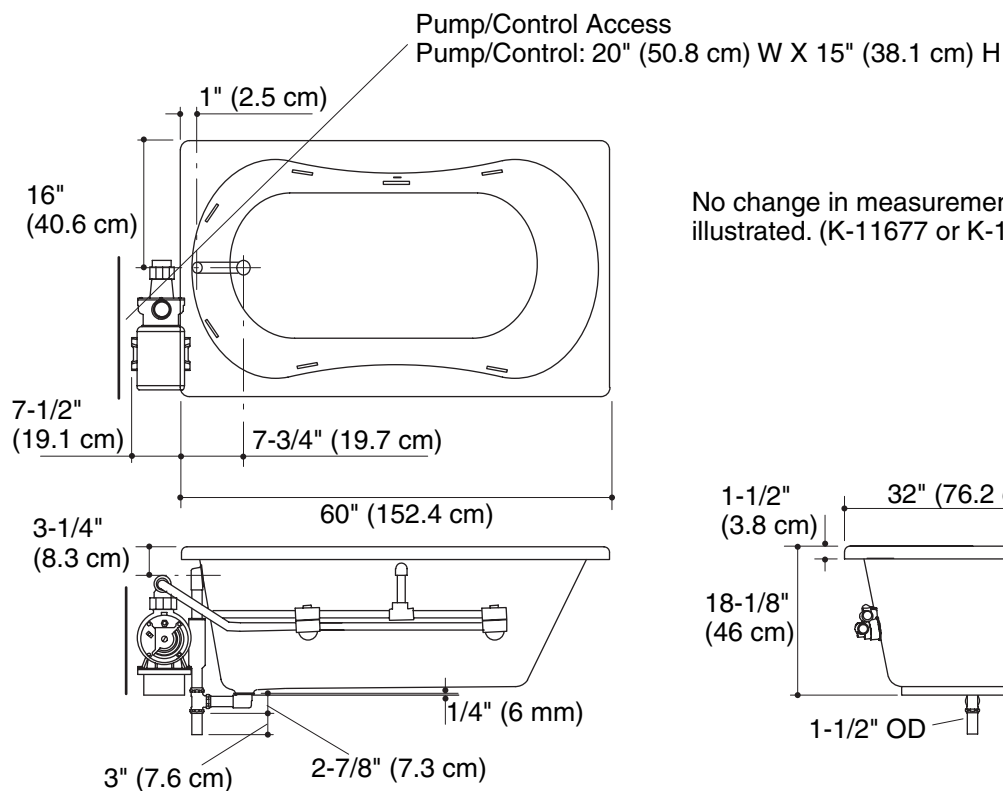

No change in measurements if connected with drain illustrated. (K-11677 or K-11677M)

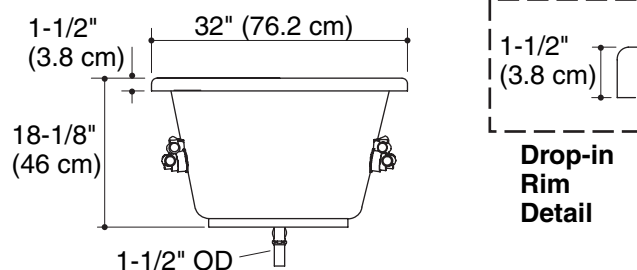

Product Diagram