

KOHLER®

Roughing-In

K-1106-CN PROFLEX® 6032 ACRYLIC BATH WHIRLPOOL

Product Information

Applicable product:	
Bath whirlpool, drop-in rim style, custom pump	K-1106-CN pump
Product will comply with the Americans with Disabilities Act when installed per the requirements of the Accessibility Guidelines, Section 607 Bathtubs, of the Act.	
Recommended accessories:	
Drain	K-11677
Fixture*:	
Basin area:	
Bathing well	46" (116.8 cm) x 20" (50.8 cm)
Top area	55" (139.7 cm) x 22" (55.9 cm)
To overflow:	
Water depth	12-1/2" (31.8 cm)
Capacity	49 gal (185.5 L)
Weight	49 lbs (22.2 kg)
Drop-in cut-out	58-1/2" (148.6 cm) x 30-1/2" (77.5 cm)
* Approximate measurements for comparison only.	

Pump:	Hp	V	Hz	A
1-speed	1.25	120	60	7.5

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):	
Pump/control	120 V, 15 A, 60 Hz
Locate the outlet behind the whirlpool and within 24" (61 cm) of the pump.	


Installation Notes

Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 36 lbs/square foot (178 kg/square meter) loading.

The apron must be installed before the finished floor and wall materials are installed.

This fixture conforms to ANSI Standard Z124.1.2. All dimensions are nominal.

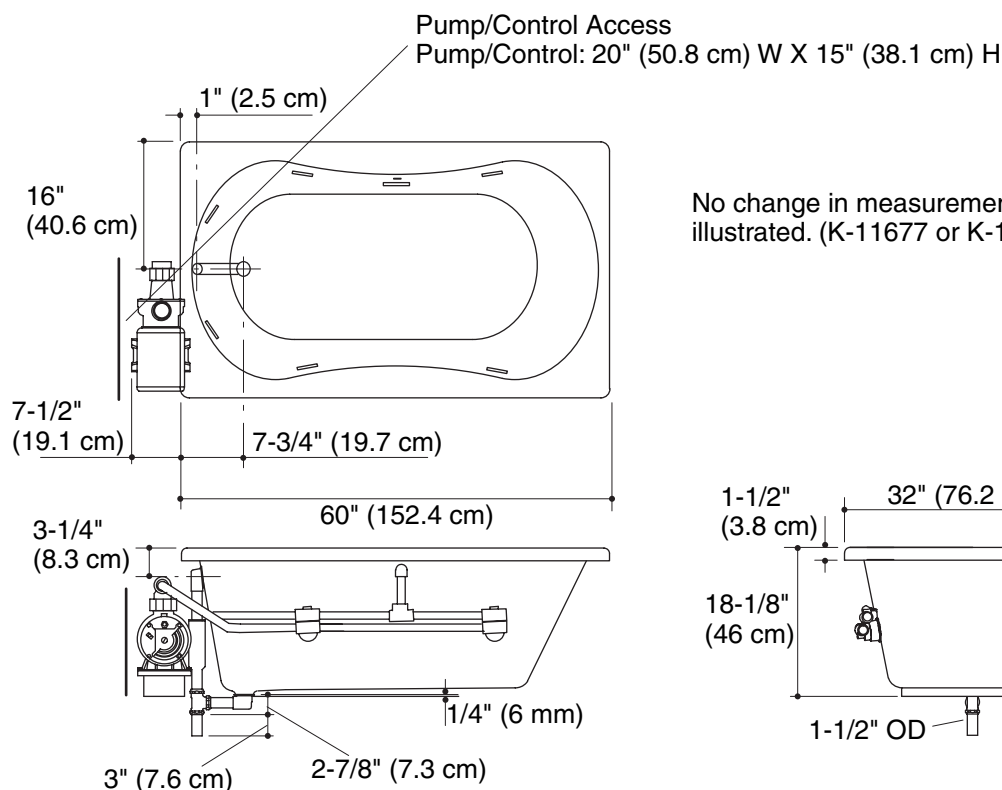

No change in measurements if connected with drain illustrated. (K-11677 or K-11677M)

