

Features


- Acrylic
- Available with drop-in rim or tile flange
- Tile flange models available with left or right outlet
- 6 individually adjustable multi-directional hydro-massage jets
- 1.25 hp pump with air switch and grounding-type plug-in cord
- In-line heater
- Molded lumbar supports and armrests
- 60" (152.4 cm) x 32" (76.2 cm) x 18-1/8" (46 cm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.7M
- ANSI Z124.1
- IAPMO/UPC
- Underwriter's Laboratories (UL)

BATH WHIRLPOOL WITH HEATER K-1106-H

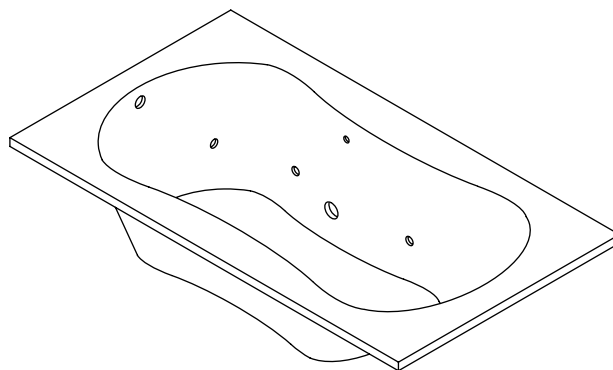

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories:

- CP: Polished Chrome
- 0: White
- Other: Refer to Price Book for additional colors/finishes
- NA: None applicable

Specified Model

Model	Description	Colors/Finishes	
K-1106-H	Whirlpool, drop-in style rim, with heater	☐ 0 White	☐ Other _____
K-1106-LH	Whirlpool with left outlet, tile flange, and heater	☐ 0 White	☐ Other _____
K-1106-RH	Whirlpool with right outlet, tile flange, and heater	☐ 0 White	☐ Other _____

Recommended Accessory		
K-11677	Drain	☐ CP

Optional Accessories			
K-1284	Removable apron	☐ 0 White	☐ Other _____
K-1639	Timer kit		☐ NA

Product Specification:

The bath whirlpool shall be 60" (152.4 cm) in length, 32" (76.2 cm) in width, and 18-1/8" (46 cm) in height. Bath whirlpool shall be made of acrylic. Bath whirlpool shall be available as drop-in rim style or with tile flange with left or right outlet. Bath whirlpool shall have 6 individually adjustable multi-directional hydro-massage jets, 1.25 hp pump with air switch and cord with plug, and an in-line heater with cord and plug. Bath whirlpool shall have molded lumbar supports and armrests. Bath whirlpool shall be UL listed. Bath whirlpool shall have optional K-1639 timer kit. Bath whirlpool shall be Kohler Model K-1106-H-_____-_____-_____.

PROFLEX™ 6032

Technical Information

Fixture*:	basin area	top area	weight
Bathing well	46" (116.8 cm) x 20" (50.8 cm)	55" (139.7 cm) x 22" (55.9 cm)	54 lbs (24 kg)
	water depth	capacity	
To overflow	12-1/2" (31.8 cm)	49 gal (185 L)	

* Approximate measurements for comparison only.

Pump:	Hp	V	Hz	A
1-speed	1.25	120	60	7.5

Heater:	kW	V	Hz	A
	1.5	120	60	12.5

Required Electrical Service


Two dedicated circuits required, each protected with a Class A Ground-Fault Circuit-Interrupter (GFCI):	
Pump/control	120 V, 15 A, 60 Hz
Locate the outlet behind the whirlpool and within 24" (61 cm) of the pump.	

Installation Notes

Floor support under whirlpool must provide for a minimum of 1000 lbs (454 kg) loading.

The apron must be installed before the finished floor and wall materials.

No change in measurements if connected with drain illustrated. (K-11677 or K-11677M)

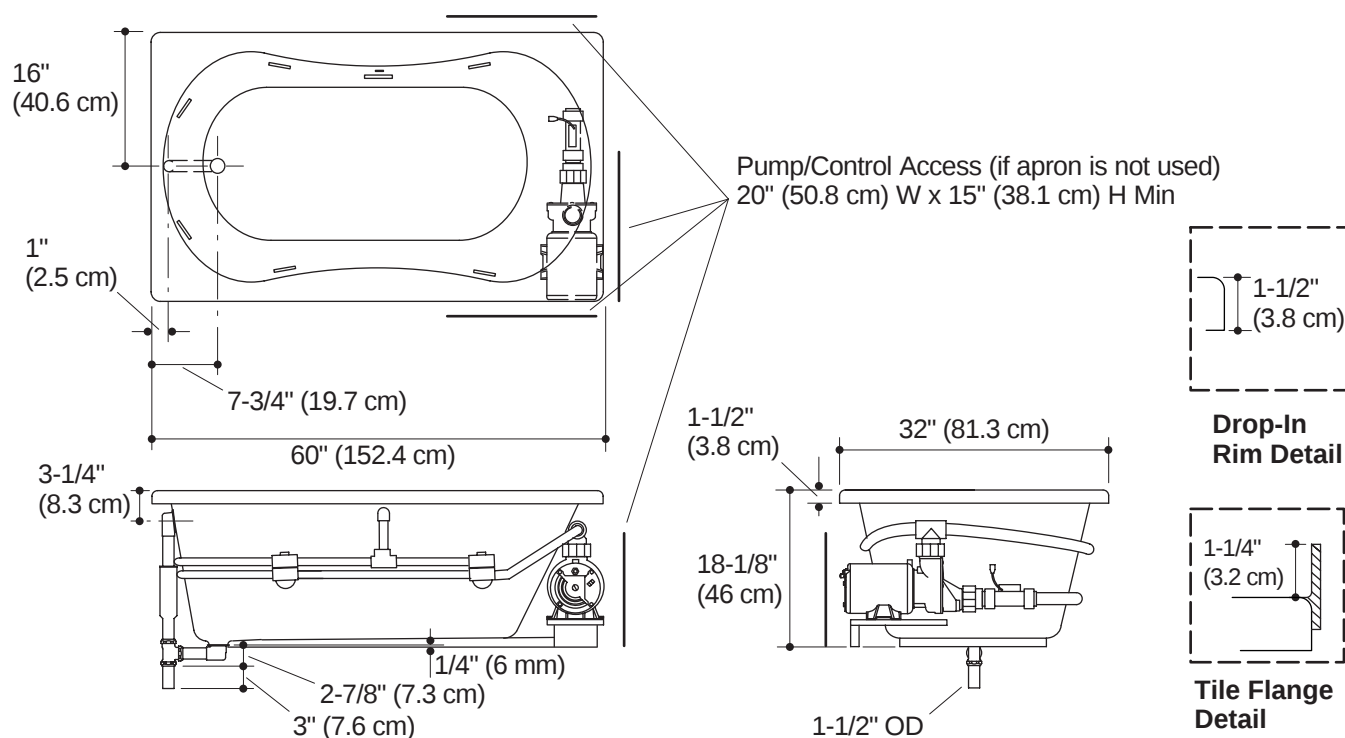

Product Diagram