

Features


- Acrylic
- 1.5 hp variable-speed pump with 1.5 kW heater and back-lit user keypad
- 8 Flexjets™
- Less all trim
- 72" (182.9 cm) x 42" (106.7 cm) x 22" (55.9 cm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.7M
- ANSI Z124.1.2
- IAPMO/UPC
- Underwriters Laboratories (UL)

6' BATH WHIRLPOOL K-1418-H2

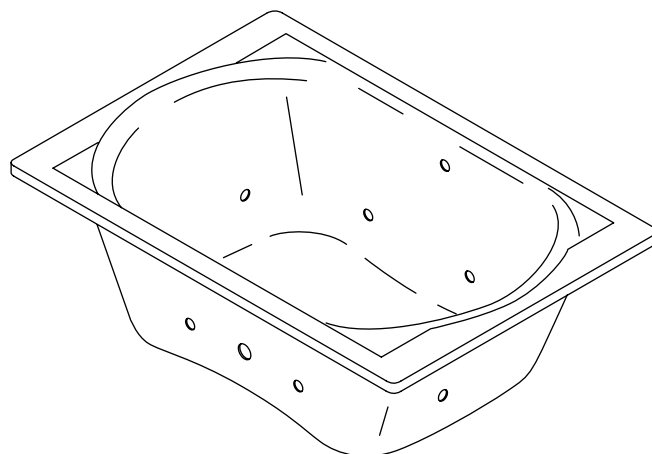

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- NA: None applicable
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes		
K-1418-H2	Bath whirlpool	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
Required Accessories				
K-9698	Jet trim kit	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
Recommended Accessories				
K-7161-AF	Pop-up drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
Optional Accessories				
K-1491	Pillow	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
K-1601	Footstop	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
K-1703	Remote control			<input type="checkbox"/> NA

Product Specification

The acrylic bath whirlpool shall be 72" (182.9 cm) in length, 42" (106.7 cm) in width, and 22" (55.9 cm) in height. The bath whirlpool shall have 8 Flexjets™, a 1.5 hp variable-speed pump, a 1.5 kW heater, and a back-lit user keypad. The bath whirlpool shall be less all trim. The bath whirlpool shall be Kohler Model K-1418-H2-_____.

MEMOIRS®

Technical Information

Fixture*:	
Basin area:	
Bathing well	48" (121.9 cm) x 27" (68.6 cm)
Top area	60" (152.4 cm) x 30" (76.2 cm)
To overflow:	
Water depth	16" (40.6 cm)
Capacity	94 gal (355.8 L)
Weight	140 lbs (63.5 kg)
Drop-in cut-out	70-1/2" (179.1 cm) x 40-1/2" (102.9 cm)
* Approximate measurements for comparison only.	

Pump:	Hp	kW	V	Hz	A
Variable-speed	1.5	1.5	240	50/60	11

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Earth-Leakage Circuit-Breaker (ELCB):

Pump/control 220/240 V, 20 A, 50/60 Hz

Installation Notes

Install this product according to the installation guide.


Floor support under whirlpool must provide for a minimum of 43 lbs/square foot (209 kg/square meter) loading.

Hot water supply should be 70% of capacity or greater. Installations will vary.

If installing a rim-mount faucet, make sure there is no interference with drain overflow and circulating system before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

This whirlpool is designed for drop-in installation only. It is not suited for use in a three-wall alcove with an overhead shower.

No change in measurements if connected with drain illustrated. (K-7161-AF or K-7161M-AF)

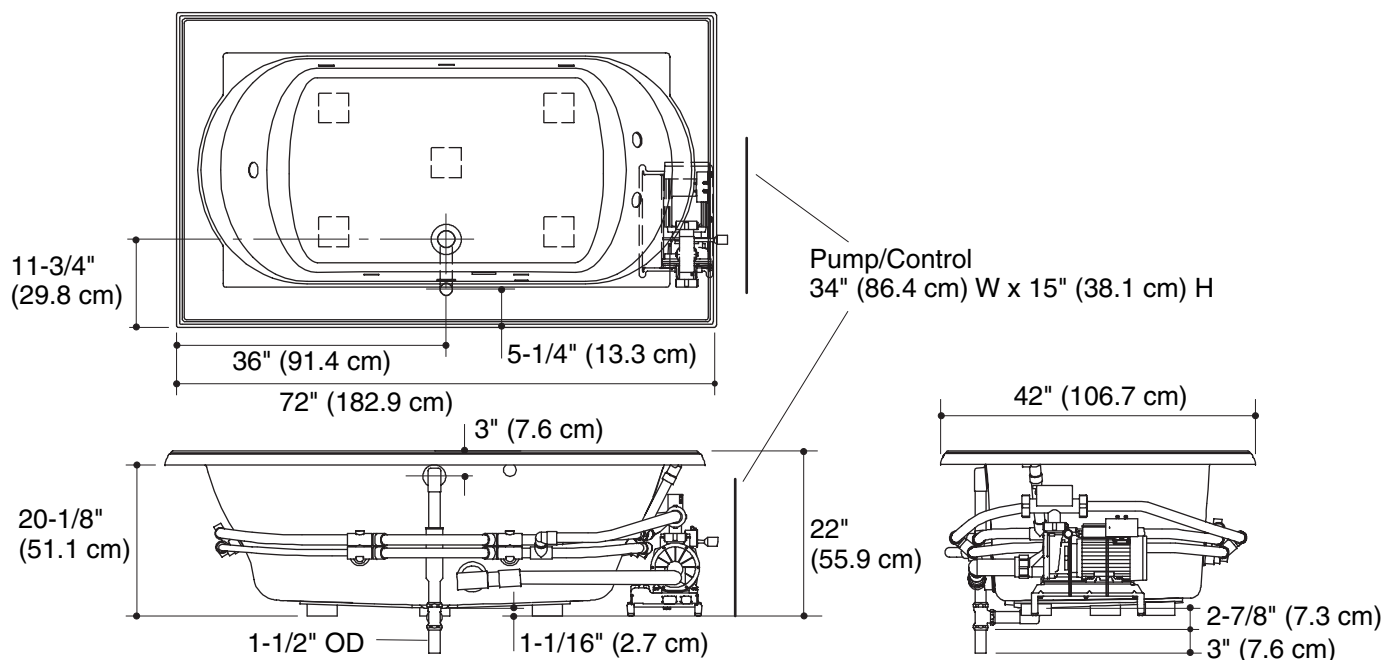

Product Diagram