

### Features


- Acrylic
- Integral tile flange
- 60 gallon (227.1 L) capacity
- Armrests and lumbar support to cradle the body
- Integral apron simplifies alcove installation
- 60" (152.4 cm) x 32" (81.3 cm) x 20" (50.8 cm)

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- IAPMO/UPC

### BATH WITH INTEGRAL APRON K-1108-LA/RA

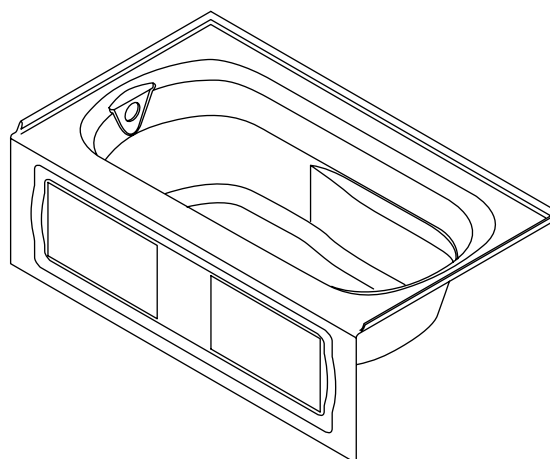

### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

### Specified Model

Model	Description	Colors/Finishes		
K-1108-LA	Bath with left drain, integral apron (shown)	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
K-1108-RA	Bath with right drain, integral apron	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
<b>Recommended Accessories</b>				
K-7160-AF	Drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____

### Product Specification

The acrylic bath shall be 60" (152.4 cm) in length, 32" (81.3 cm) in width, and 20" (50.8 cm) in height. The bath shall have an integral tile flange, and an integral apron that simplifies alcove installation. The bath shall have a 60 gal (227.1 L) capacity. The bath shall also have lumbar supports and armrests to cradle the body. The bath shall be Kohler Model K-1108-\_\_\_\_\_-\_\_\_\_\_-\_\_\_\_\_.

# **PORTRAIT® 5'**

## **Technical Information**


Fixture*:	
Basin area:	
Bathing well	42" (106.7 cm) x 20" (50.8 cm)
Top area	51" (129.5 cm) x 24" (61 cm)
To overflow:	
Water depth	14" (35.6 cm)
Capacity	60 gal (227.1 L)
Weight	80 lbs (36.3 kg)
* Approximate measurements for comparison only.	

## **Installation Notes**

Install this product according to the installation guide.

Floor support under the bath must provide for a minimum loading of 46 lbs/square foot (222 kg/square meter) loading.

No change in measurements if connected with drain illustrated. (K-7161-AF or K-7161M-AF)

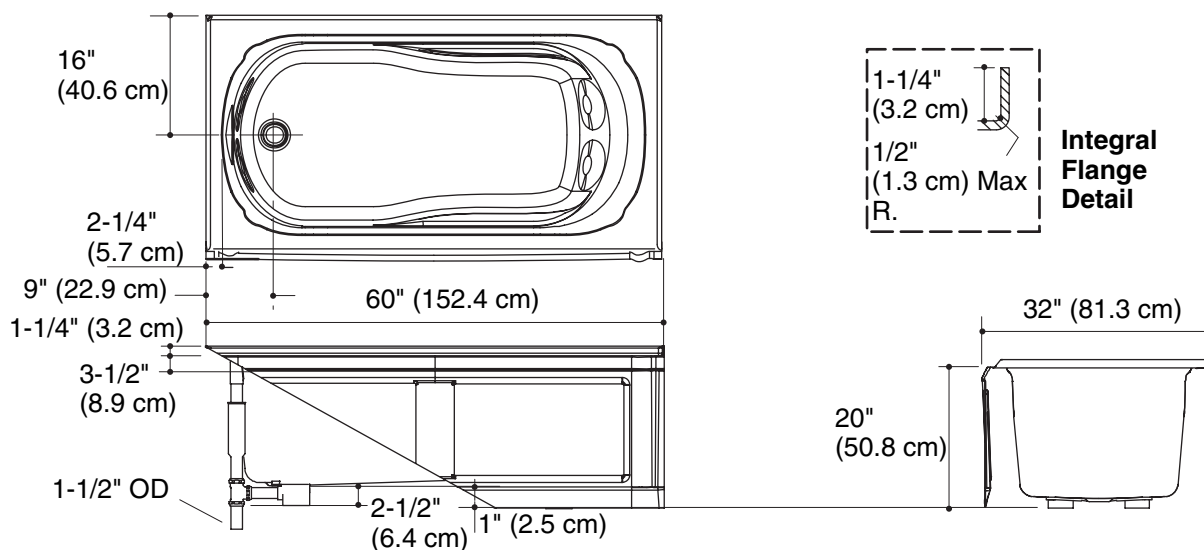

## **Product Diagram**