

#### **Features**


- 3 year warranty
- Steam generators can be installed up to 25' (7.6 m) away from steam bath area

## **Codes/Standards Applicable**

Specified model meets or exceeds the following:

- UL 499
- CSA C22.2 No. 88

# K-1695-NA



#### Colors/Finishes

• NA: None applicable

#### **Accessories:**

- CP: Polished Chrome
- PB: Polished Brass
- Other: Refer to Price Book for additional colors/finishes

# **Specified Model**

Model	Description		Colors/Finishes	
K-1695-NA	Steam generator, 5 kW, fast response		□ NA	
Required Acc	essories: Choose either Option 1 or Option 2 below	•		
Option 1:				
K-1647-PC	Steam control kit, power clean	□ CP	□ PB	☐ Other
Option 2:	·	·	·	·
K-1737	Steam adaptor kit and steam head AND	□ CP	□ PB	☐ Other
K-694	Landscape digital interface OR			☐ Other
K-695	Portrait digital interface			□ Other
Optional Acce	essories: Only available for use with Option 2 above			
K-657	Landscape auxiliary digital interface			☐ Other
K-658	Portrait auxiliary digital interface			☐ Other

# **Product Specification:**

The 5 kW steam generator shall have a three-year warranty. Product shall be installed up to 25' (7.6 m) away from the steam bath area. Steam generator shall be Kohler Model K-1695-NA.

### **Technical Information**

Water and drain	n requirements:			
Water supply	3/8" copper line, 3/8" NPT female thread			
Steam line	1/2" copper line, 1/2" NPT female thread			
Pressure relief valve	3/4" NPT female thread, valve supplied			
Drain line	3/8" copper line, 3/8" NPT female thread, ball valve supplied			
Generator:				
Weight	19-1/2 lbs (8.8 kg)			
Electrical rating	240 V, 60 Hz, 30 A			

#### **Installation Notes**

Install this product according to the installation guide.


Factory sized: L x H x W = cubic feet. Choose the appropriate model. For every foot of ceiling height over 8 ft (2.4 m), use the next larger steam unit. Always round your measurements up. Wall material is irrelevant.

For this steam generator, do not exceed the maximum volume rating:


Steam generator model	Power rating	Maximum volume rating
K-1695-NA	5 kW	56 cu ft (1.6 cu m)

# **Required Electrical Service**

Dedicated circuit required:				
Generator	5 kW, 240 V, 30 A, 60 Hz			

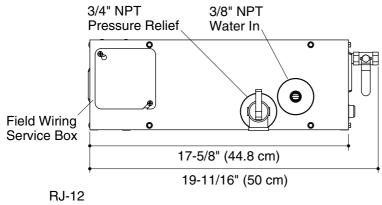

Minimum required access is 20" (50.8 cm) L x 13" (33 cm) H x 6-1/2" (16.5 cm) W.

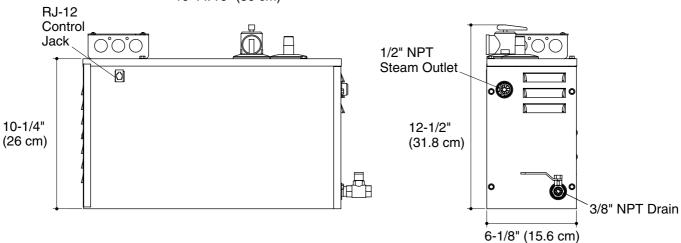

**Product Diagram** 

