

FEATURES


- For use with K-1000-H2 or K-1002-H2 only
- 25" (63.5cm) x 19-1/4" (48.9cm) x 13" (33cm)
- For indoor use only
- 2 HP variable speed pump with backlit user keypad and remote control
- 4kW heater (requires second dedicated electrical service)
- 2 chromatherapy lights
- Recirculating pump kit delivers flows up to 80 gallons (302.8L) per minute of powerful hydro-massage
- Order one pump kit, Waterfall or tower, and drain for each complete BodySpa custom installation

CODES/STANDARDS

Specified model meets or exceeds the following:

- Underwriters Laboratories (UL)

K-1001-H2, K-1003-H2

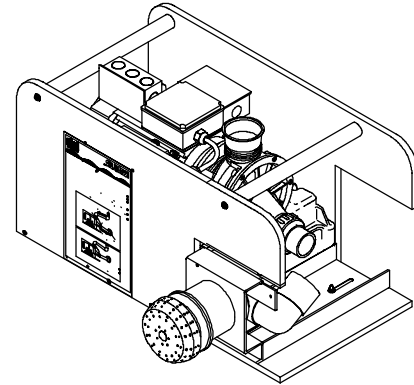

COLORS/FINISHES

- CP Polished Chrome
- PB Polished Brass
- 0 White

Accessories:

- CP Polished Chrome
- PB Polished Brass
- CW White with Polished Chrome
- PW White with Polished Brass
- 0 White

SPECIFIED MODEL:

Model	Description	Colors/Finishes			
K-1001-H2	BodySpa custom pump kit for tower (shown)	☐ CP	☐ PB		☐ 0 White
K-1003-H2	BodySpa custom pump kit for Waterfall	☐ CP	☐ PB		☐ 0 White
Required Accessories					
K-1000-H2	10-Jet Tower	☐ CP	☐ PB	☐ CW	☐ PW
K-1002-H2	BodySpa Waterfall	☐ CP	☐ PB		☐ 0 White
Recommended Accessories					
K-7179	BodySpa custom drain	☐ CP	☐ PB		

PRODUCT SPECIFICATION:

The pump kit shall be for use with K-1000-H2 or K-1002-H2 only. Pump kit shall be 25" (63.58cm) in length, 19-1/4" (48.9cm) in width and 13" (33cm) in height and be for indoor use only. Pump kit shall have 2HP, variable speed pump, 4kW heater and be UL listed. Recirculating pump kit shall deliver flows up to 80 gallons (302.8L) per minute of powerful hydro-massage. Pump kit shall be configured with Waterfall or tower and custom drain or equivalent. Pump kit shall be Kohler Model K-_____.

PRODUCT INFORMATION

Fixture:				
Weight		60 lbs. (27 kg)		
Variable-speed pump	2 HP	220-240 V	50/60 Hz	6 A
Heater	4 kW	220-240 V	50/60 Hz	15 A


REQUIRED ELECTRICAL SERVICE

Two dedicated circuits required, each protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Earth-Leakage Circuit-Breaker (ELCB):	
Pump/control	220-240 V, 20 A, 50/60 Hz
Heater	220-240 V, 20 A, 50/60 Hz

INSTALLATION NOTES

Install this product according to the installation guide.

Locate keypad so the 8' (2.4m) control cable is within reach of the control box.

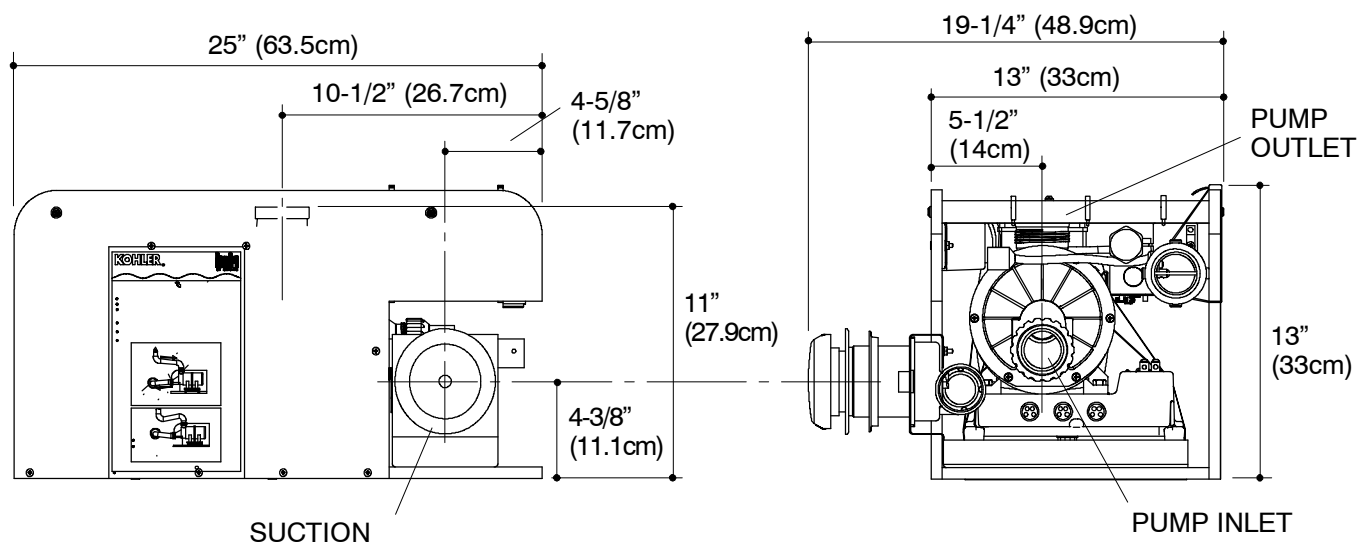

PRODUCT DIAGRAM

K-1001-H2, K-1003-H2 BodySpa™ Pump Kit