


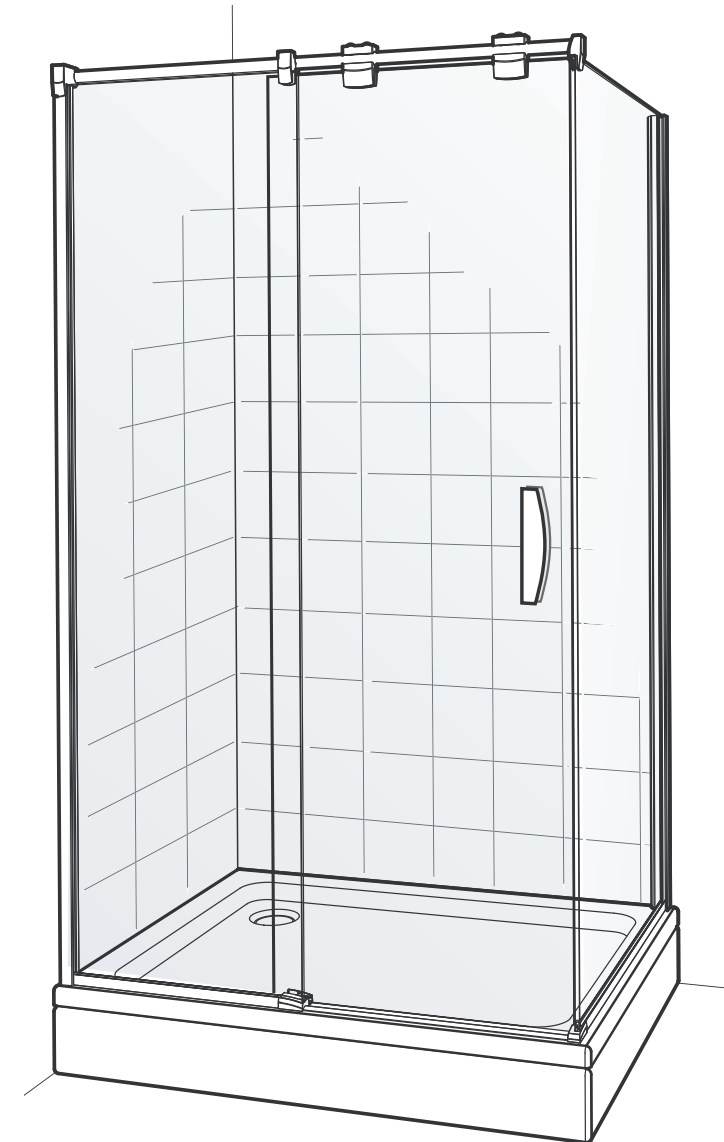

# Minima™ Sliding Door

K-705790, K-705791

— Fitting Instructions —

USA: 1-800-4-KOHLER

Canada: 1-800-964-5590

México: 001-877-680-1310

[kohler.com](http://kohler.com)

THE BOLD LOOK  
OF **KOHLER®**

©2006 Kohler Co.



# Contents

|        |                    |        |                      |
|--------|--------------------|--------|----------------------|
| Page 3 | Introduction       | Page 6 | Unit Adjustment      |
| Page 3 | Safety Precautions | Page 6 | Technical Helpline   |
| Page 4 | Components         | Page 7 | Fitting Instructions |
| Page 6 | Preparation        |        |                      |

# Introduction

**Thank you for choosing the Kohler Company**  
We appreciate your commitment to Kohler quality. Please take a few minutes to review this manual before you start installation. If you encounter any installation problems, please don't hesitate to contact us. Our phone numbers and website are listed on the back cover. Thanks again for choosing the Kohler Company.

The following pages aim to provide comprehensive installation instructions, plus advice on how to care and maintain your product.


We recommend that the unit is installed by a qualified Installer.

Please retain this document for future reference.

# Safety Precautions



Wear protective footwear when lifting panels



Wear Safety glasses when drilling


Glass panels should be handled with care and protective packaging along glass edges should be kept in place for as long as possible to prevent damage before installation

People not familiar with the fitting of Kohler Products may require the assistance from another person at certain stages of the procedure. We have indicated these points in the process with the Caution Symbol.




**Caution**

# Components

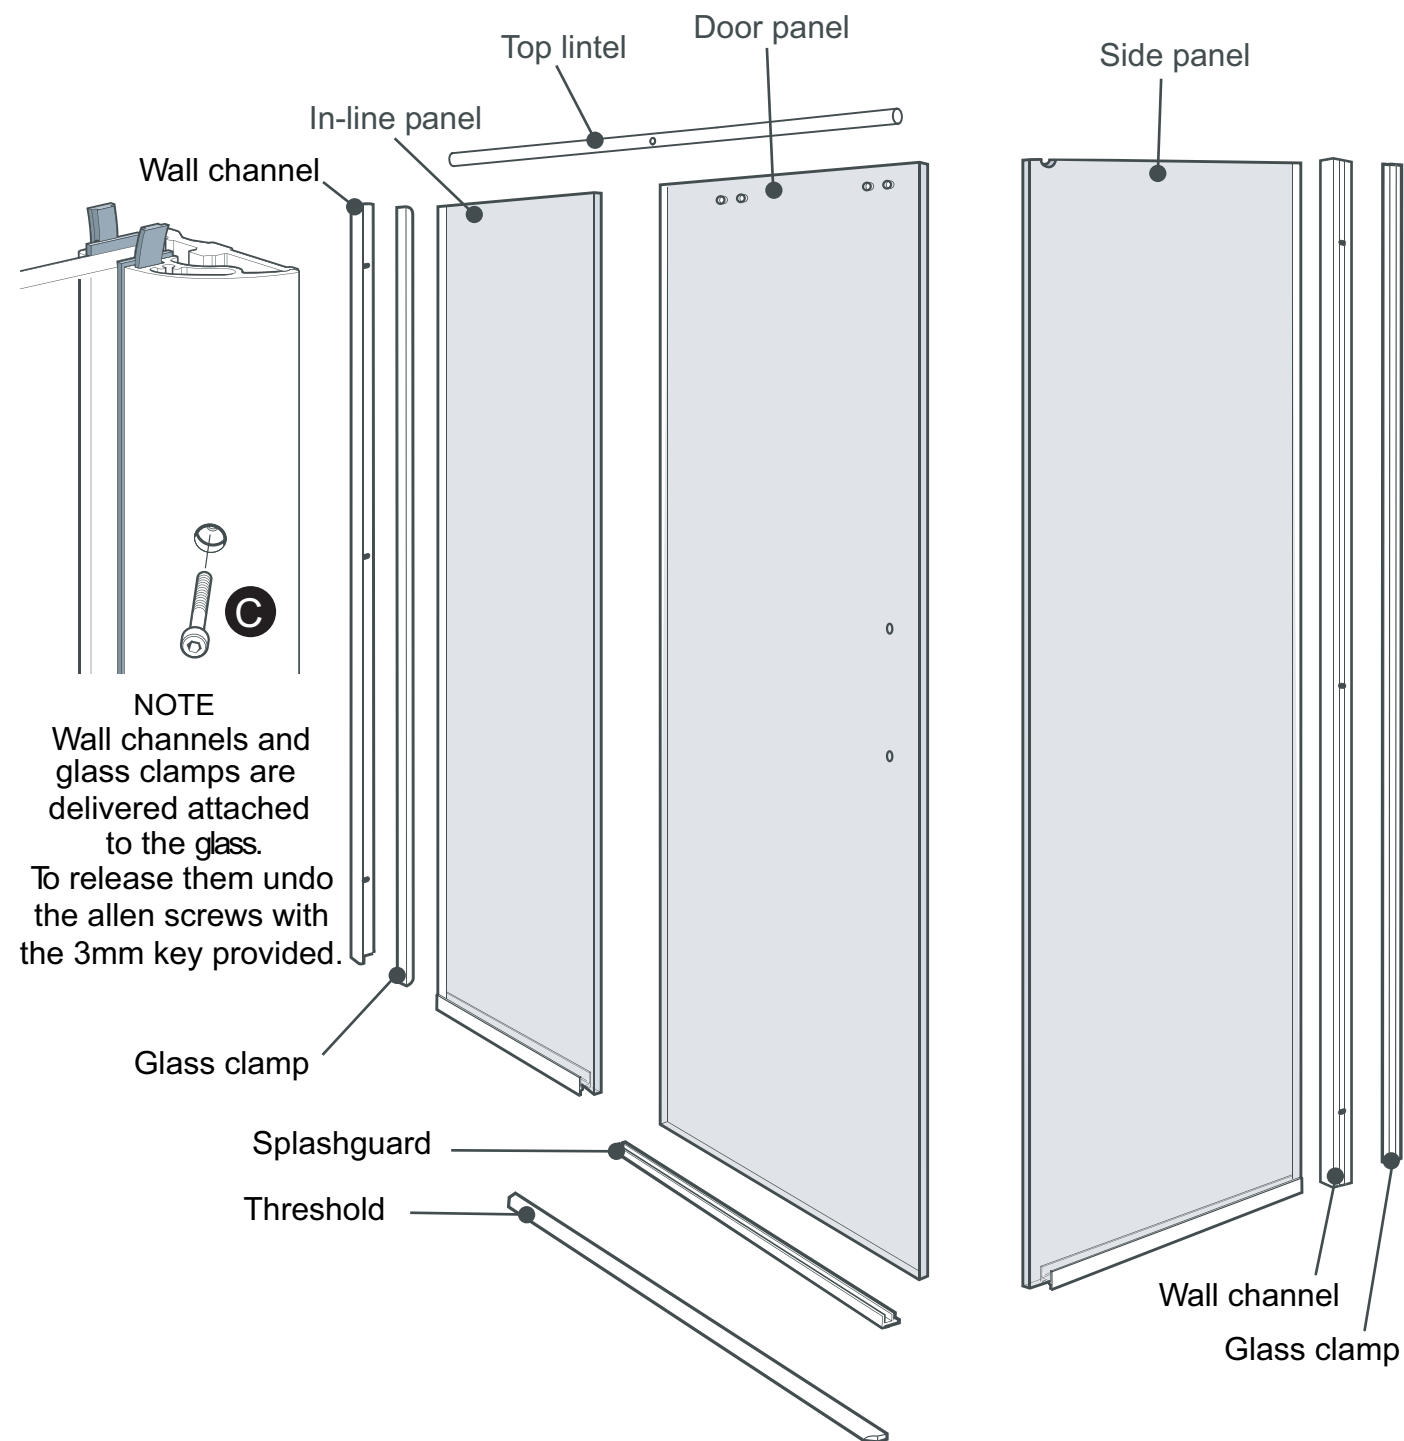


These instructions refer to installation on a tray, except where noted for installation on a tiled floor enclosure

**FIX HANDLE**  
Fit screws from inside of enclosure

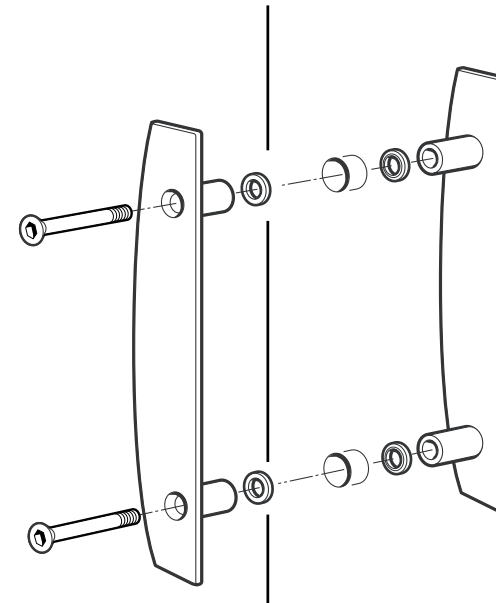


**STEP 35**

Close the door. The roller assembly on the closing side should just pass the stop on top of the lintel

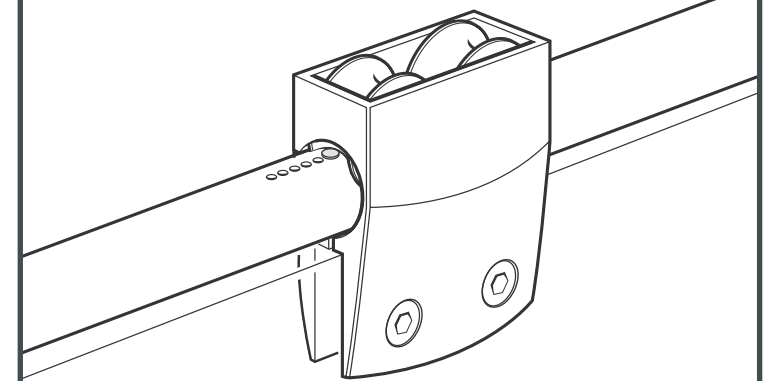


If the stop is in the under the roller or the door slides back reposition the stop in one of the other holes until the door closes correctly

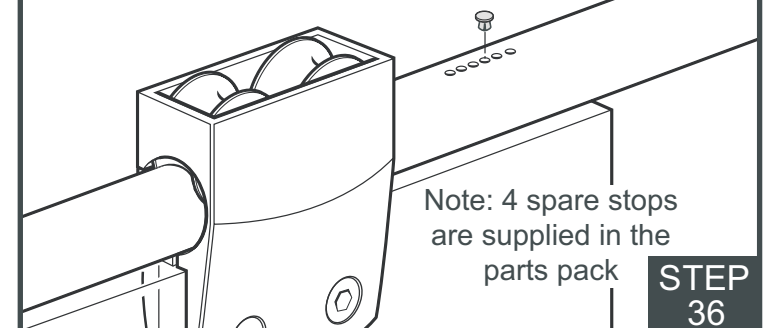


**STEP 36**

Lay a thin bead of sealant:

between the 'H' section and the end cap guide


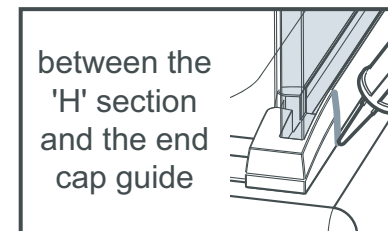


between the 'H' section and the bottom guide

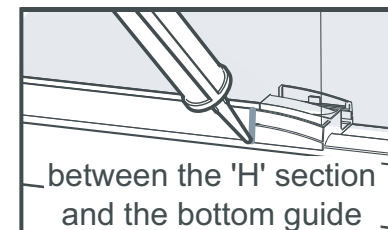


x2

along the outside of both 'H' sections and around the guides

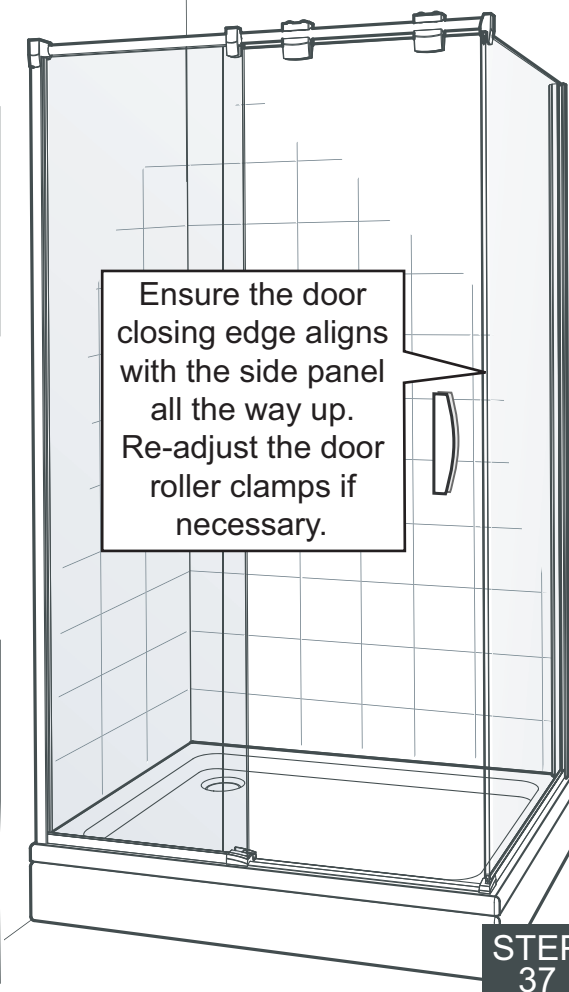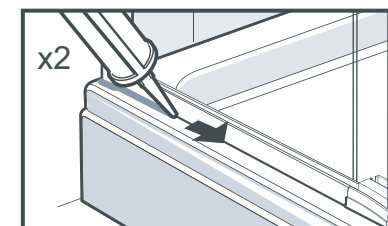

**STEP 37**


**24hrs**

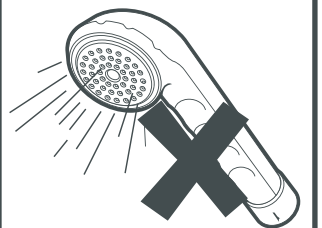









Allow at least 24 hours before using shower to allow sealant to cure

**STEP 38**

The unit should be cleaned regularly. Occasionally apply a light lubrication spray to the door mechanism.



**STEP 39**

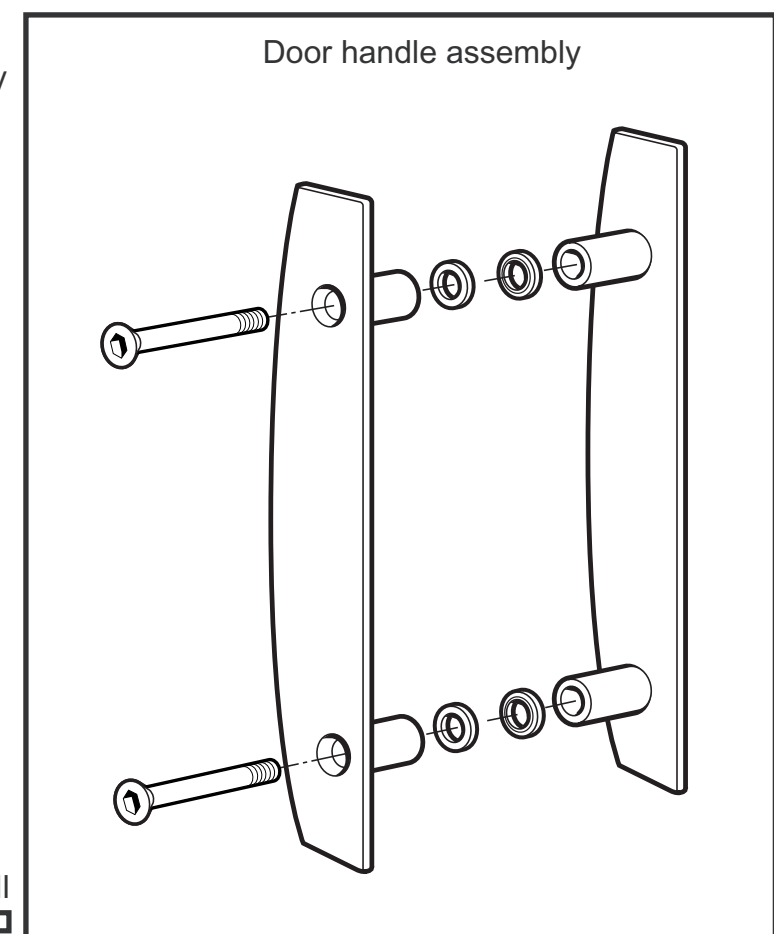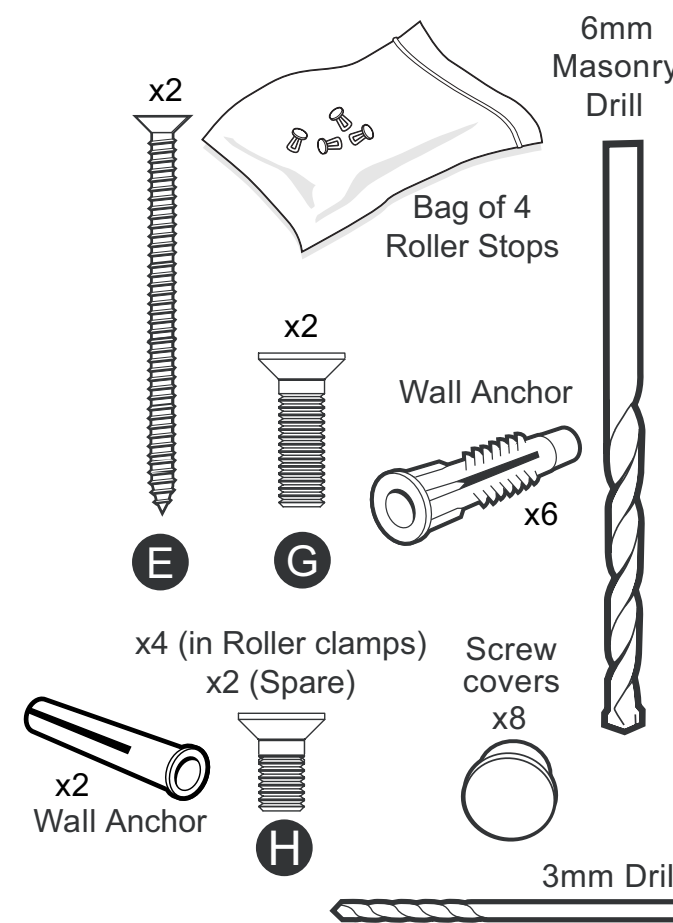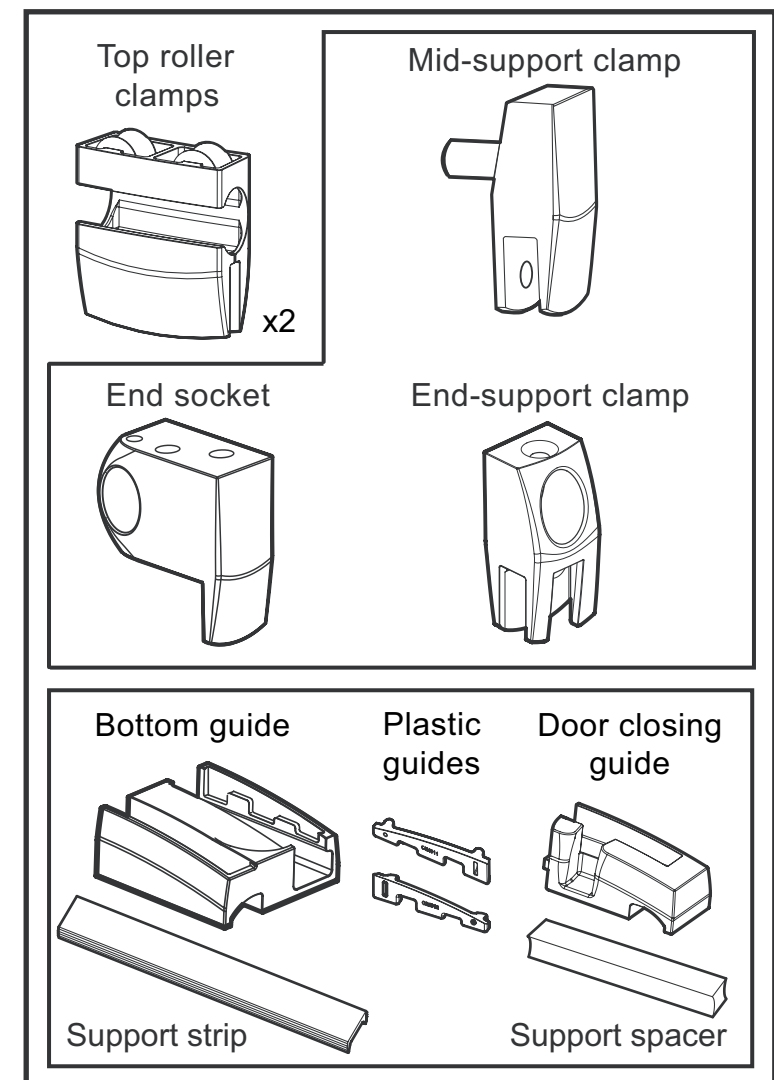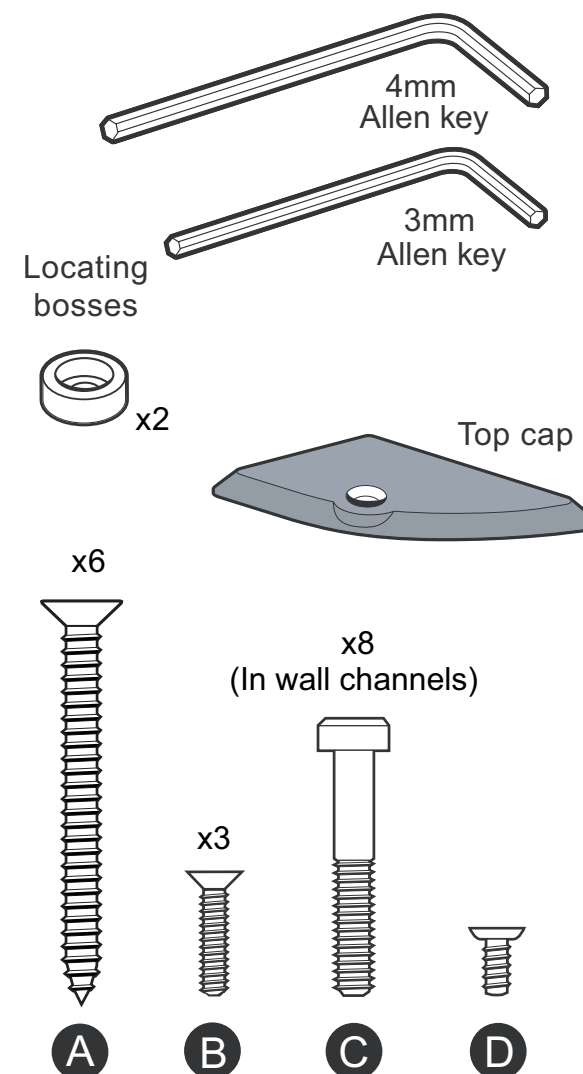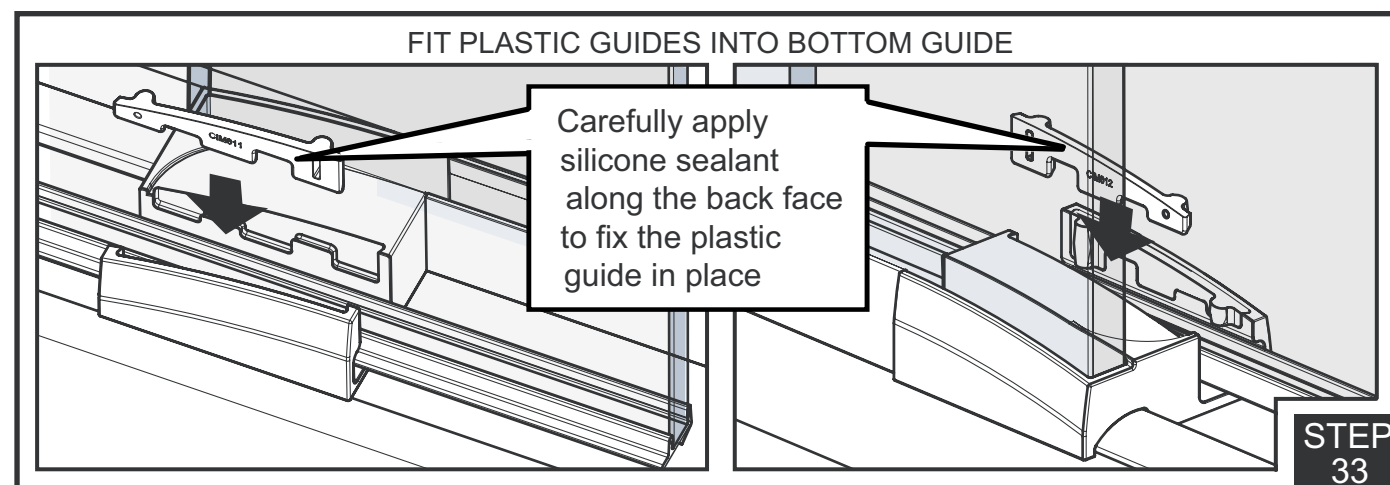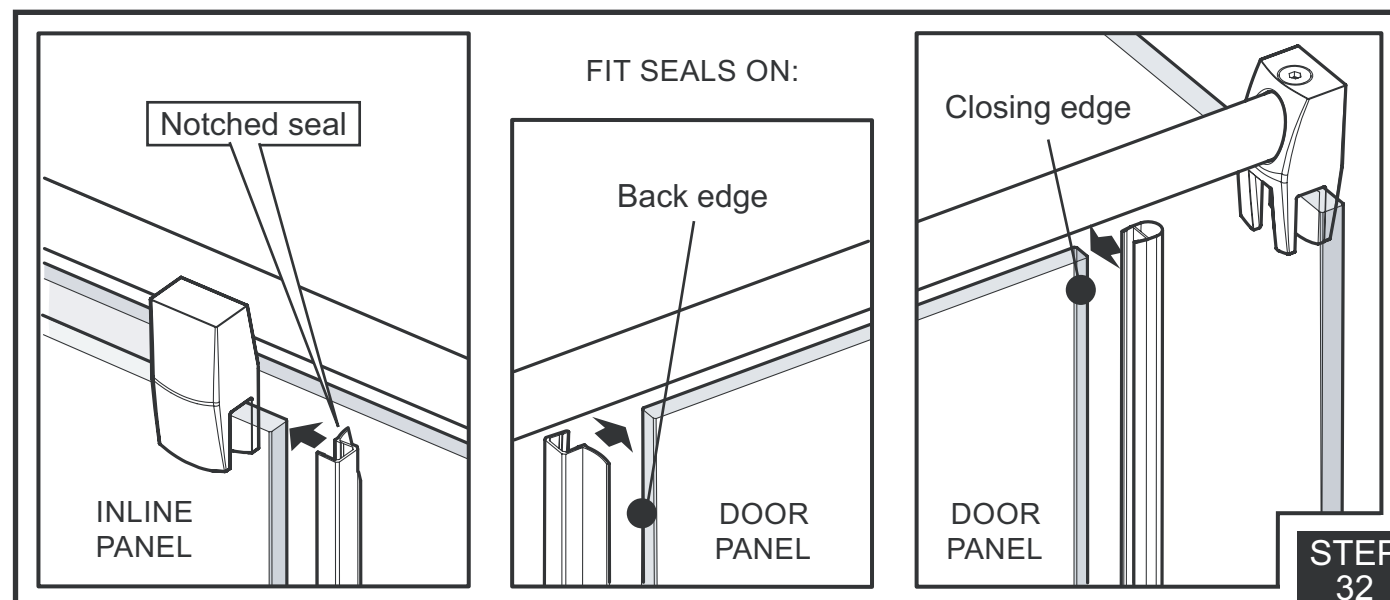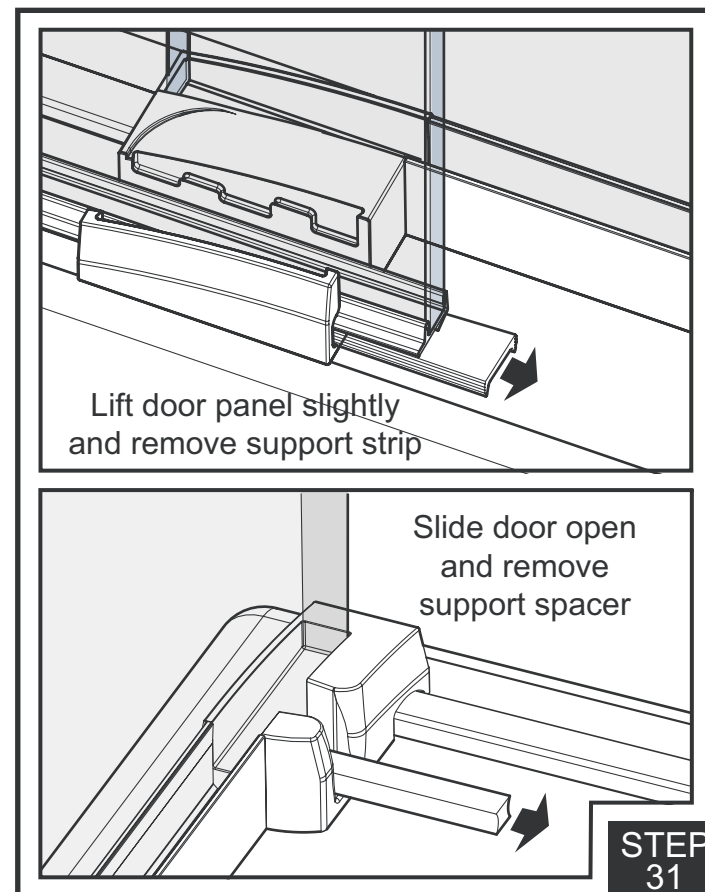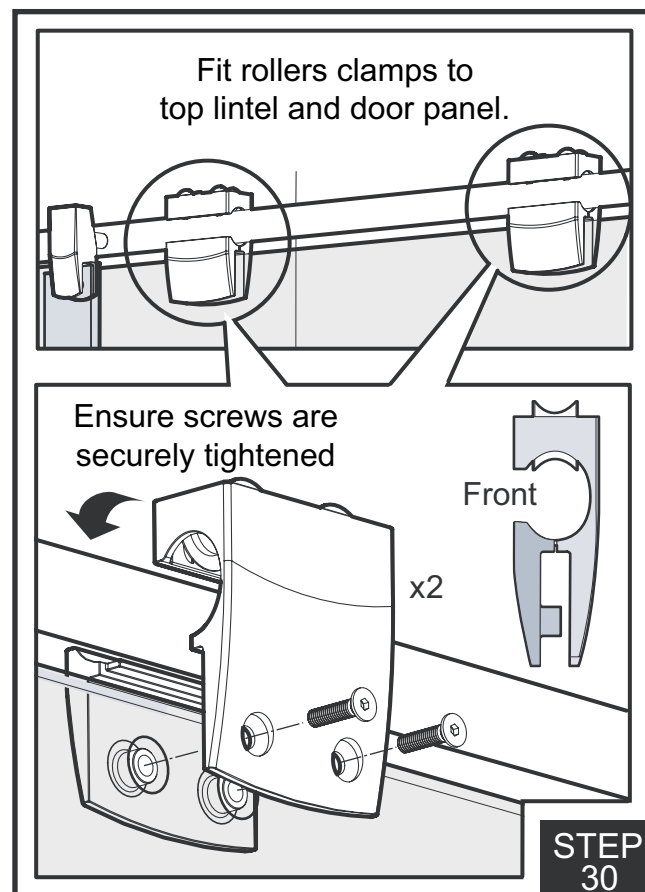

## Preparation

- Walls:** Before installation check that all walls and surfaces are sound and able to accept the fittings required to attach the unit.
- Tray:** Fit the tray first ensuring that it is level in all planes.  
Failure to do this could result in the unit not installing properly.
- Tiling:** Tiling must be completed prior to the installation of the unit.

## Unit Adjustment

Each unit has a minimum and maximum adjustment range and will only fit into a space between those sizes.



| Unit Width | Unit Adjustment    |
|------------|--------------------|
| 47"        | 45 3/4" to 46 3/8" |






  

| Unit Depth | Unit Adjustment |
|------------|-----------------|
| 34"        | 34" to 34 3/4"  |

## Technical Helpline

Before ringing the Helpline please ensure you have the model name, colour, size and if possible the serial number available.

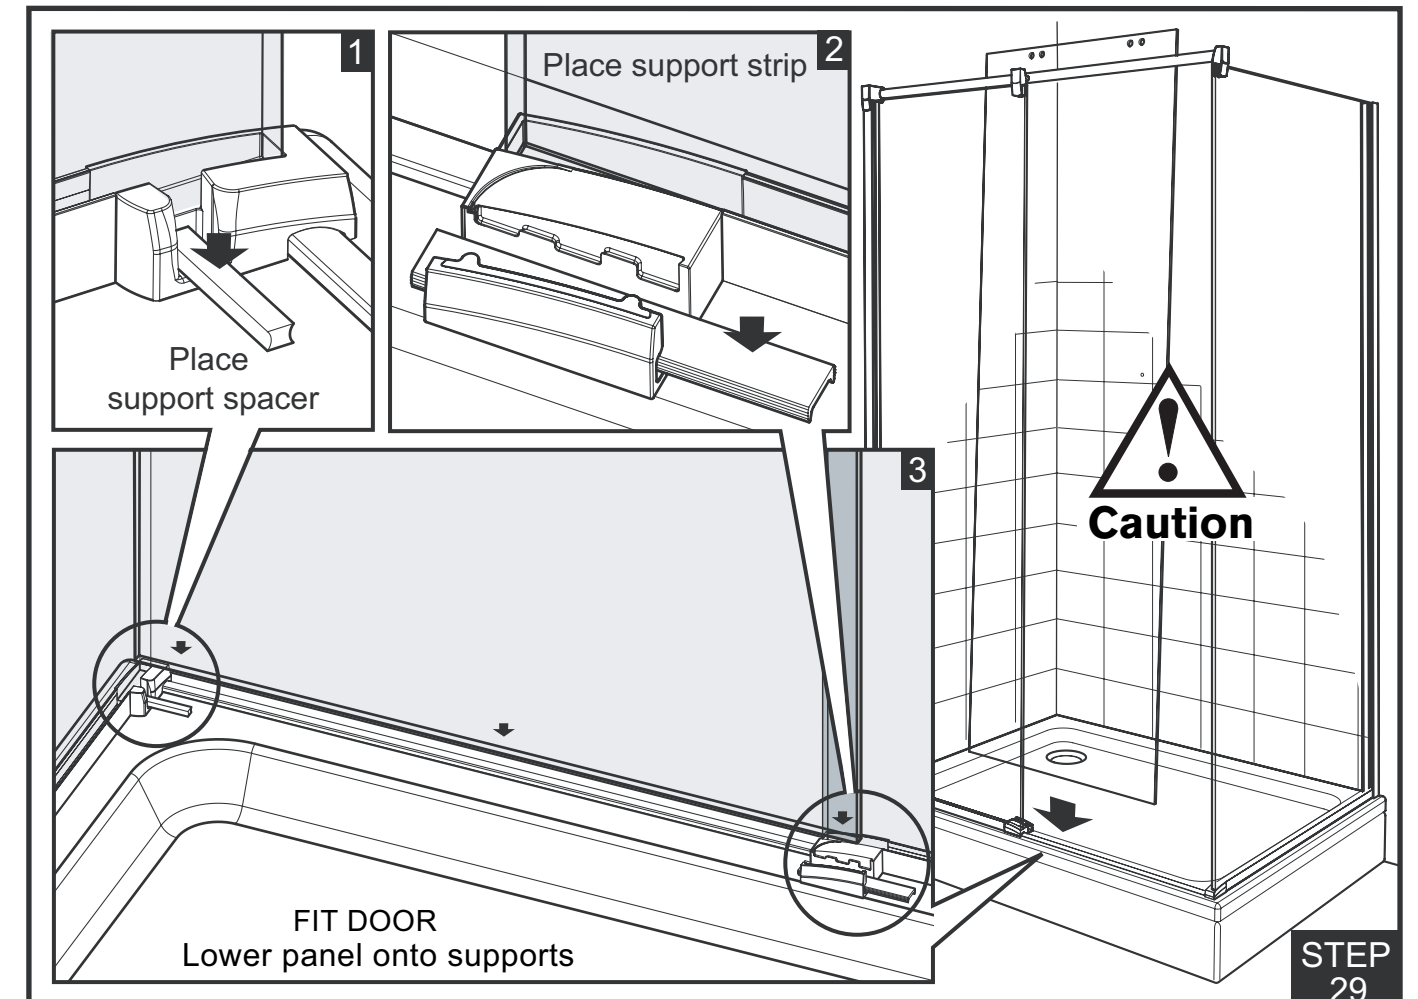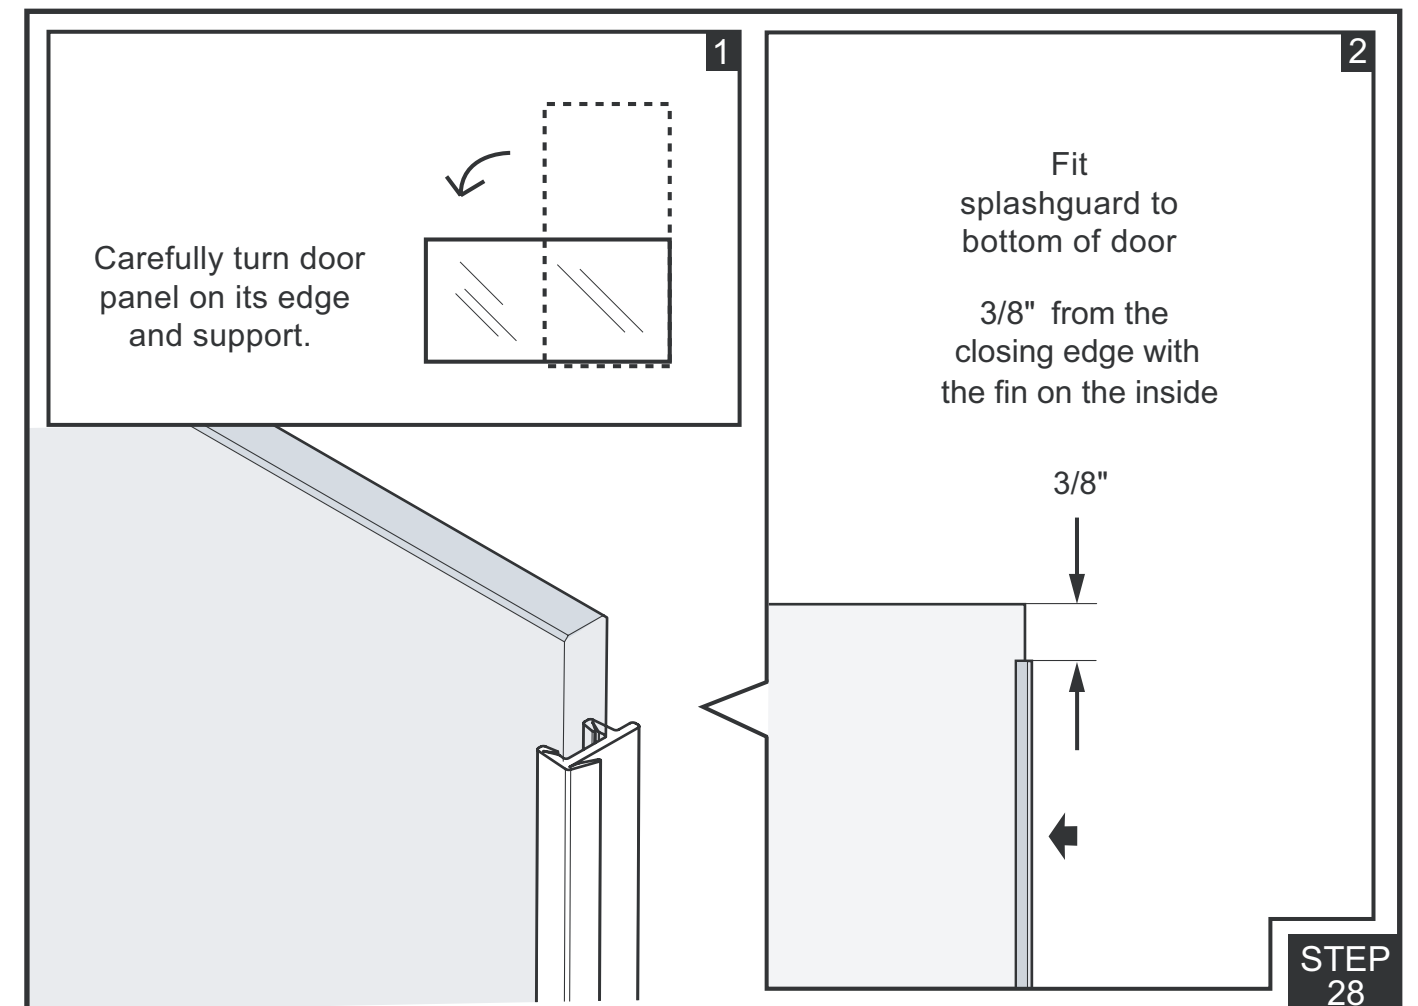

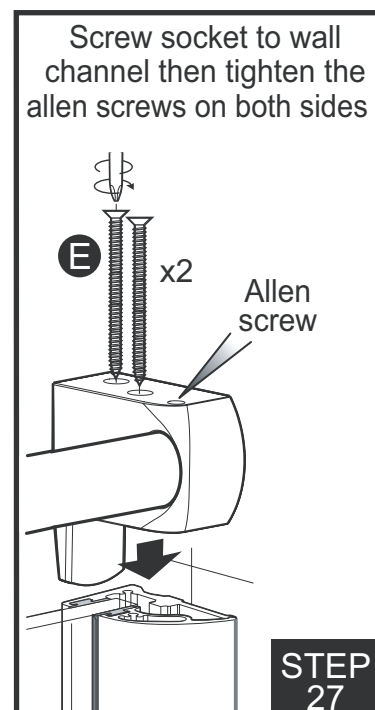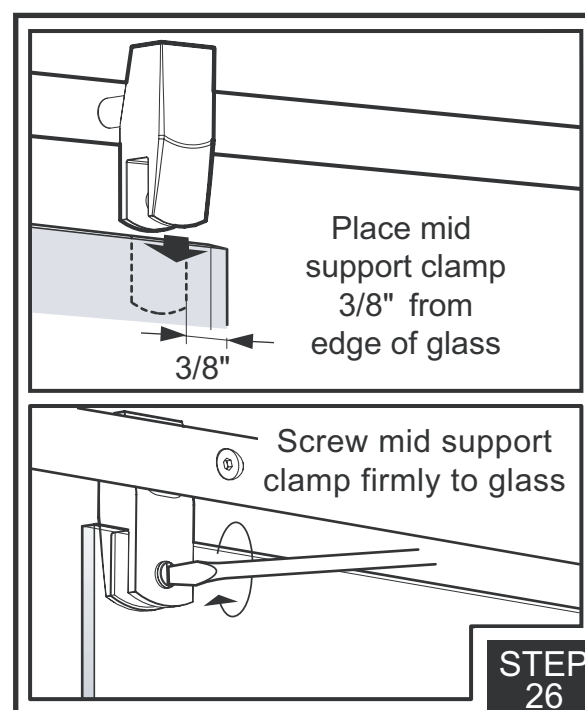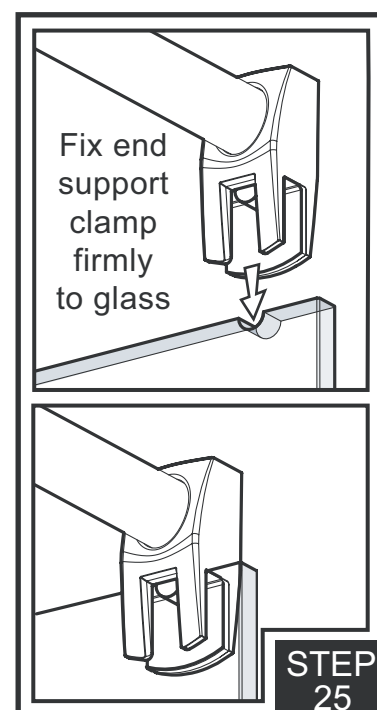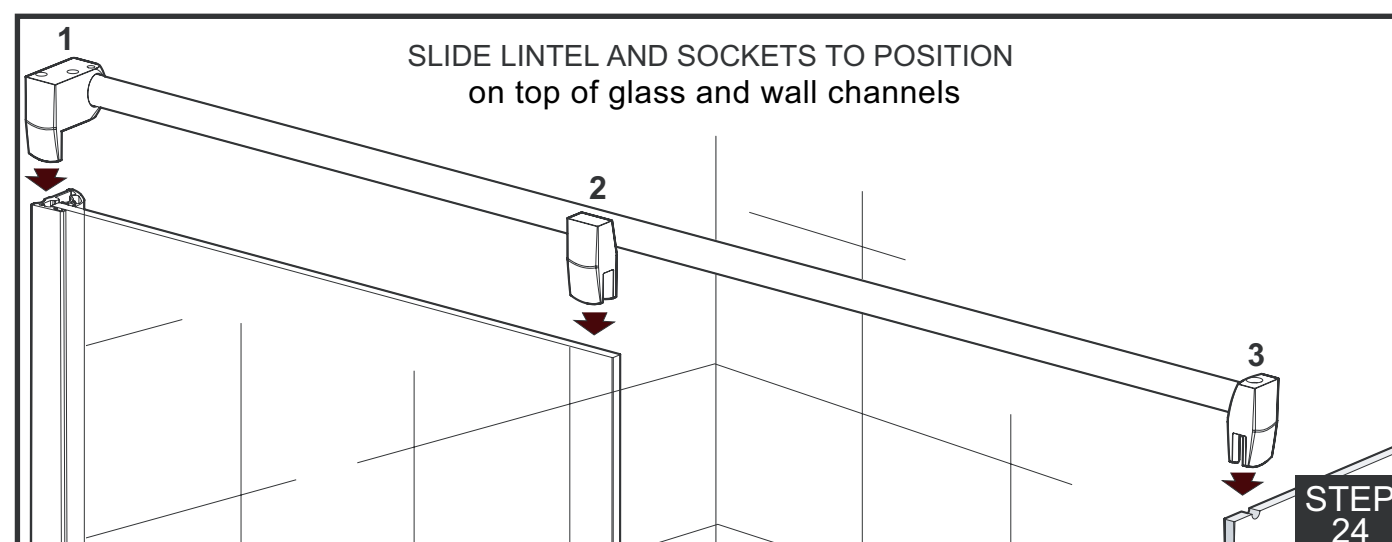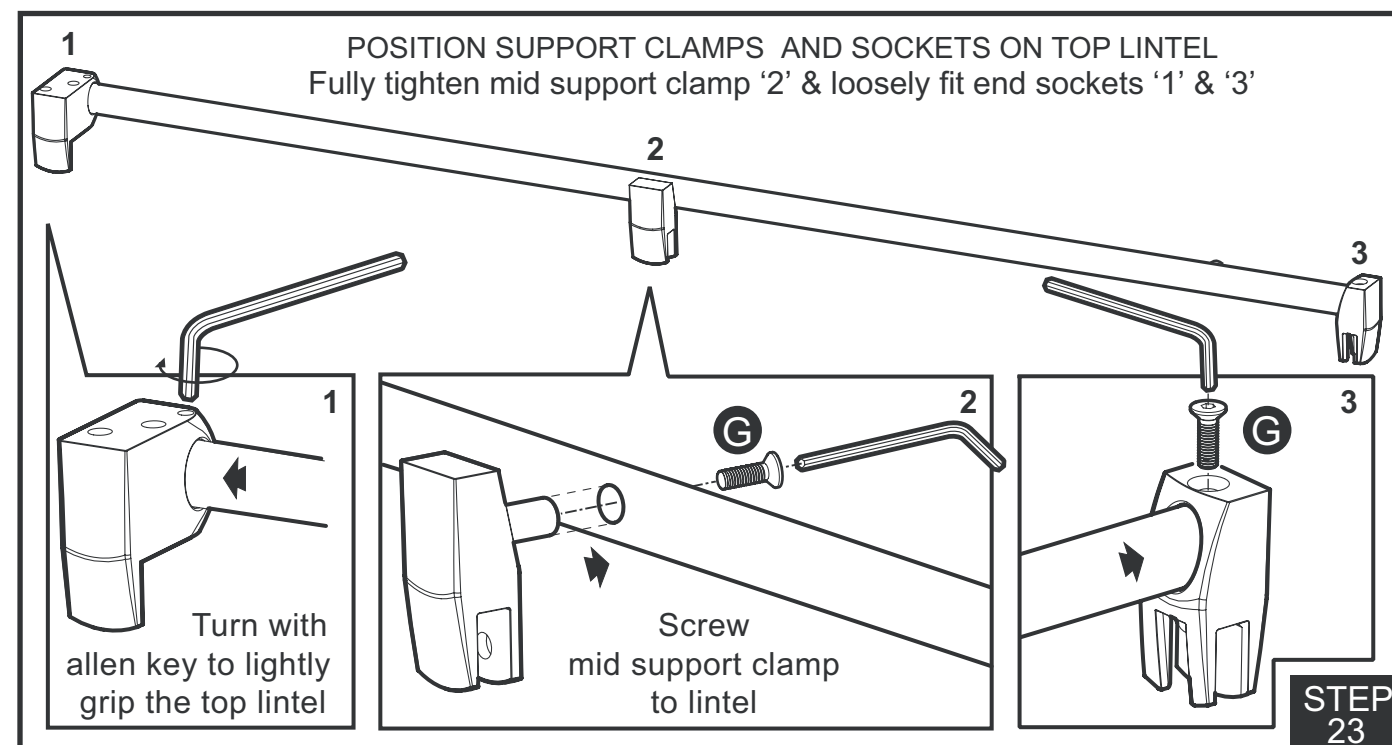

## Fitting Instructions

