


### FEATURES

- Heavy-gauge aluminum framed construction
- For use with standard or steam shower applications
- 5/16" (8mm) laminated privacy glass
- 48" (121.9cm) door - 1-1/2" (3.8cm) of adjustability
- 36" (91.4cm) door - 1" (2.5cm) of adjustability
- 48" (121.9cm) door fits K-9026 Purist shower receptor
- Right or left door swing
- Available with or without operating transom

## K-702220, K-702222, K-702224, K-702226

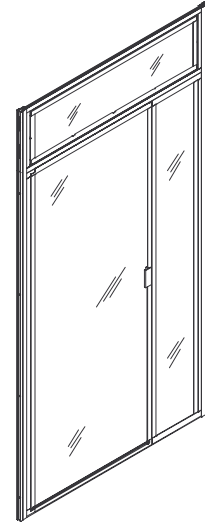

### CODES/STANDARDS APPLICABLE

- ANSI Z97.1 (tempered glass)
- ASTM C 1172

### COLORS/FINISHES

- SH Bright Silver
- NX Brushed Nickel
- SS Satin Silver

### GLASS OPTIONS

- D4 Opaque Glass



### SPECIFIED MODEL:

Model	Description	Glass Options	Colors/Finishes		
K-702220	Purist 36" (91.4cm) Framed Shower Door	<input type="checkbox"/> D4	<input type="checkbox"/> SH	<input type="checkbox"/> NX	<input type="checkbox"/> SS
K-702222	Purist 48" (121.9cm) Framed Shower Door	<input type="checkbox"/> D4	<input type="checkbox"/> SH	<input type="checkbox"/> NX	<input type="checkbox"/> SS
K-702224	Purist 36" (91.4cm) Framed Shower Door with Transom	<input type="checkbox"/> D4	<input type="checkbox"/> SH	<input type="checkbox"/> NX	<input type="checkbox"/> SS
K-702226	Purist 48" (121.9cm) Framed Shower Door with Transom (shown)	<input type="checkbox"/> D4	<input type="checkbox"/> SH	<input type="checkbox"/> NX	<input type="checkbox"/> SS

### PRODUCT SPECIFICATION:

Purist framed shower door shall have heavy-gauge aluminum framed construction for use with standard or steam shower applications. Door shall have 5/16" (8mm) laminated privacy glass. Door shall be expandable from 45-1/2" (115.6cm) to 47" (119.4cm) wide for the 48" (121.9cm) door and from 34" (86.4cm) to 35" (88.9cm) wide for the 36" (91.4cm) door. 48" (121.9cm) door shall fit K-9026 Purist shower receptor. Door shall swing left or right and be available with or without operating transom. Door shall be Kohler Model K-\_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_.

# PURIST™ FRAMED

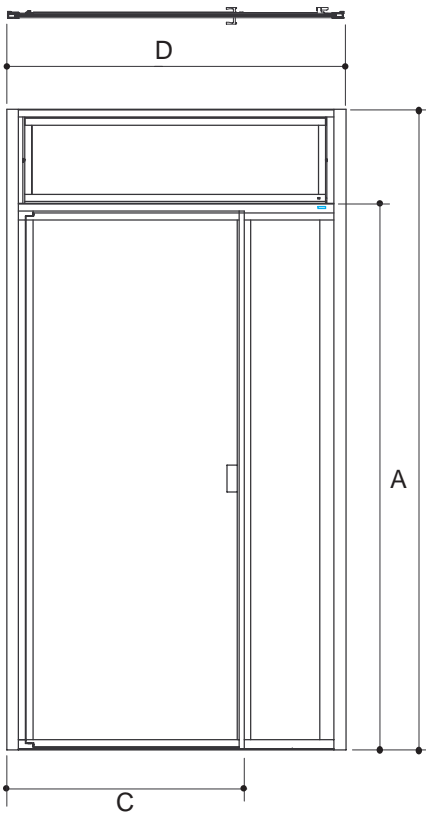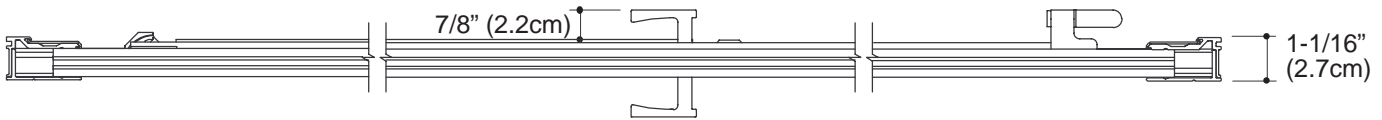

	A (Min - Max)	B (Min - Max)	C (Min - Max)	D (Min - Max)
K-702220	76" (193 cm) - 76-1/2" (194.3 cm)*		34" (86.4 cm) - 35" (88.9 cm)	
K-702222	76" (193 cm) - 76-1/2" (194.3 cm)*			45-1/2" (115.6 cm) - 47" (119.4 cm)
K-702224		89-1/8" (226.4 cm) - 89-5/8" (227.6 cm)	34" (86.4 cm) - 35" (88. cm)	
K-702226		89-1/8" (226.4 cm) - 89-5/8" (227.6 cm)		45-1/2" (115.6 cm) - 47" (119.4 cm)

B\* If unit is not a steam unit, door can be installed in any opening greater than 76" (193cm).

## PRODUCT DIAGRAM