

# CAPE HATTERASTM

#### **Features**


- Fiberglass (FRP)
- · Clear acrylic grab bar
- · Two integral seats on left and right
- Center drain outlet
- Integral soap ledges
- · One-piece unit for installation ease
- 60" (152.4 cm) x 36" (91.4 cm) x 76-1/2" (193 cm)

### **Codes/Standards Applicable**

Specified model meets or exceeds the following:

- ANSI Z124.2
- IAPMO/UPC
- Listed in State of Massachusetts
- CSA International

60" (152.4 cm) ONE-PIECE SHOWER MODULE **K-1524** 



#### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

#### Accessories:

- · CP: Polished Chrome
- PB: Polished Brass
- Other: Refer to Price Book for additional colors/finishes

## **Specified Model**

Model	Description		Colors/Finishes		
K-1524	60" (152.4 cm) one-piece shower module	□ 0 White	☐ Other		
Recommended Accessory					
K-9132	Shower drain	□ CP	□ PB	☐ Other	
Optional Accessories					
Refer to Fixtures Price Book for shower door selections, glass options, and color information.					

## **Product Specification:**

The one-piece shower module shall be 60" (152.4 cm) in length, 36" (91.4 cm) in width, and 76-1/2" (193 cm) in height. Shower module shall be made of fiberglass (FRP) and shall have center drain outlet. Shower module shall have integral seats on the left and right. Module shall have center drain and integral soap ledges. Shower module shall be Kohler Model K-1524-\_\_\_\_\_.

USA: 1-800-4-KOHLER Canada: 1-800-964-5590 kohler.com

# CAPE HATTERASTM

### **Technical Information**

Fixture:			
Weight	137 lbs. (62.1 kg)		
Configuration	1-piece		
Drain hole	3-3/8" D. (8.6 cm)		

#### **Installation Notes**

Refer to installation instructions included with the fixture before beginning installation.


The fixture is not drilled for supply fittings.

Shimming may be required to level the fixture.

Stud opening tolerance is + 1/4" (6 mm), - 0" (0 mm).

When fire rated construction is specified, dimensions are to the inside of the fire-rated wall.

Some shimming between stud frame and fixture may be required.

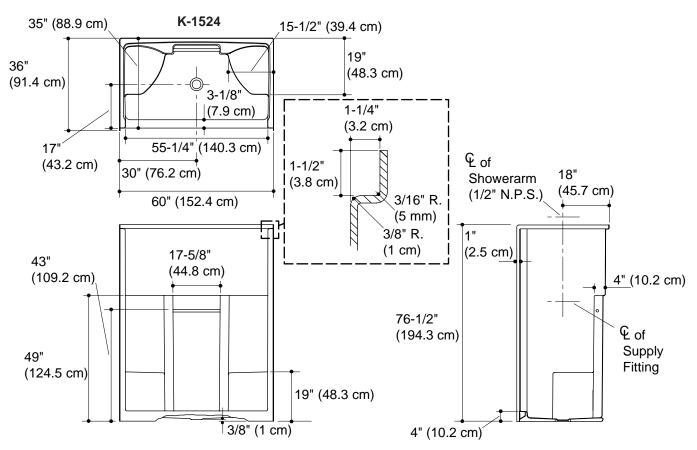

**Product Diagram** 

