

NEO-ANGLE SHOWER MODULE K-1517


Features

- Fiberglass (FRP)
- Integral ledge
- 40" (101.6 cm) x 40" (101.6 cm) x 77-1/8" (195.9 cm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.2
- IAPMO/UPC
- Canadian Standards Association (CSA)
- Listed in State of Massachusetts

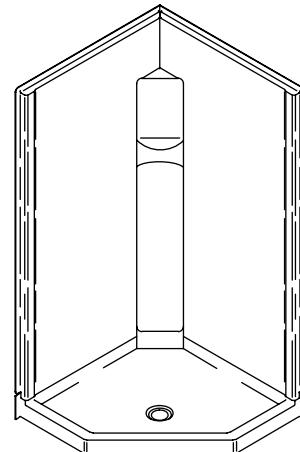

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories:

- 0: White
- CP: Polished Chrome
- PB: Polished Brass
- BH: Bright Brass
- SH: Bright Silver
- Other: Refer to Price Book for additional colors/finishes

Specified Model

| Model | Description | Colors/Finishes | |
|--------|-------------------------|----------------------------------|--------------------------------------|
| K-1517 | Neo-angle shower module | <input type="checkbox"/> 0 White | <input type="checkbox"/> Other _____ |

| Recommended Accessory | | | | |
|-----------------------|--------------------------------|-----------------------------|-----------------------------|--------------------------------------|
| K-9132 | Drain | <input type="checkbox"/> CP | <input type="checkbox"/> PB | <input type="checkbox"/> Other _____ |
| K-705230 | Arica™ neo-angle enclosure* OR | <input type="checkbox"/> BH | <input type="checkbox"/> SH | <input type="checkbox"/> 0 White |
| K-701611 | Focal™ neo-angle enclosure* | <input type="checkbox"/> BH | <input type="checkbox"/> SH | <input type="checkbox"/> 0 White |

* Refer to Fixtures Price Book for glass options.

Product Specification:

The one-piece shower module shall be 40" (101.6 cm) in length, 40" (101.6 cm) in width, and 77-1/8" (195.9 cm) in height. Shower module shall be made of fiberglass (FRP). Shower module shall have integral ledge. Shower module shall be Kohler Model K-1517-_____.

CAPE COD™

Technical Information


| Fixture: | |
|---------------|--------------------|
| Weight | 106 lbs. (48 kg) |
| Configuration | 1-piece |
| Drain Outlet | 3-3/8" D. (8.6 cm) |

Installation Notes

Refer to installation instructions included with fixture before beginning installation.

Fixture not drilled for supply fittings.

Shimming may be required to level fixture.

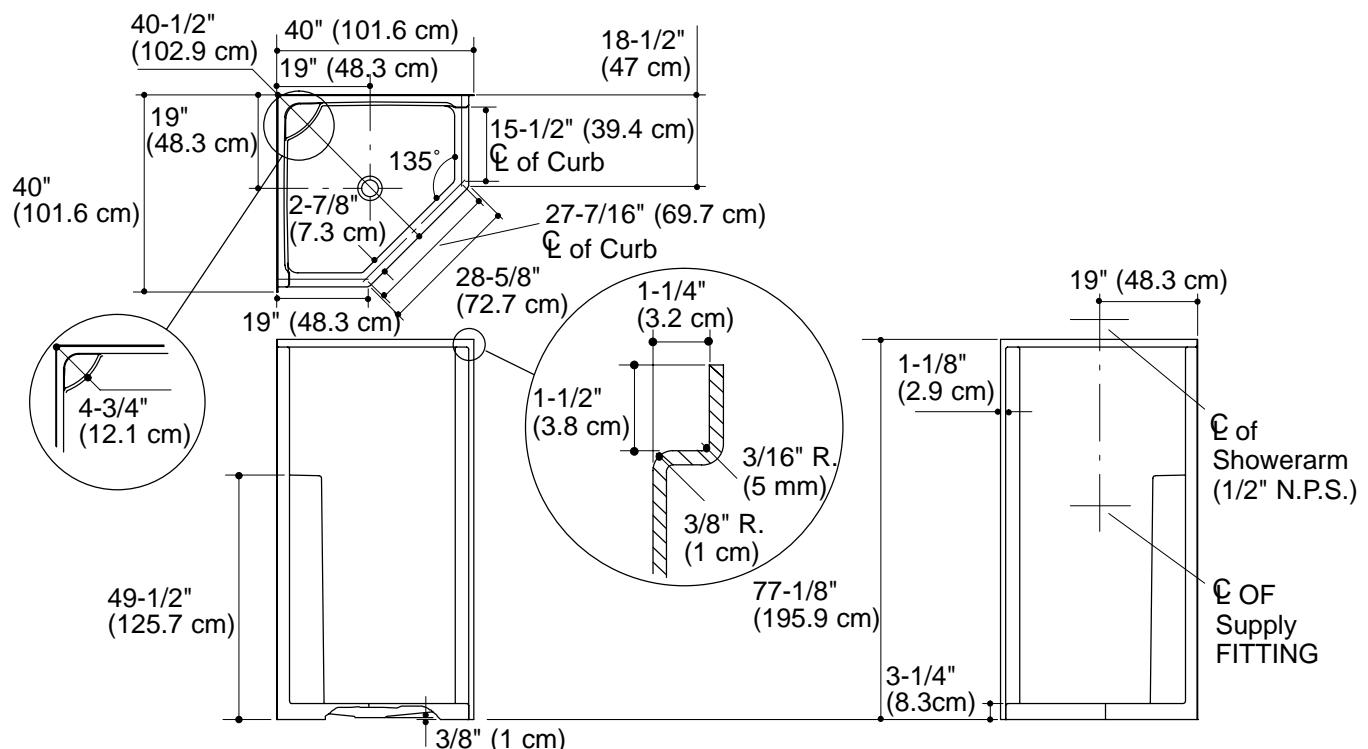

Product Diagram