


Features

- *Fiberglass (FRP)*
- *Center drain outlet*
- *One-piece unit for installation ease*
- *Molded-in floor pattern*
- *Tile-look walls*
- *Integral ledges*
- *35-3/4" (90.8 cm) x 36" (91.4 cm) x 76-1/2" (194.3 cm)*

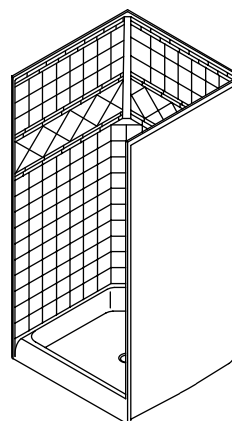

Codes/Standards Applicable

Specified model meets or exceeds the following:

- *ANSI Z124.2*
- *IAPMO/UPC*
- *CSA International*

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories:

- CP: Polished Chrome
- PB: Polished Brass
- Other: Refer to Price Book for additional colors/finishes
- SH: Bright Silver
- BH: Bright Brass

Specified Model

Model	Description	Colors/Finishes		
K-1538	Shower stall, 36" (91.4 cm) width	☐ 0	☐ Other_____	
Recommended Accessories				
K-9132	Shower drain	☐ CP	☐ PB	☐ Other_____
K-701216	Focal shower door* 32" (81.3 cm) - 34" (86.4 cm) x 70" (177.8 cm)	☐ SH	☐ BH	☐ 0
K-701217	Focal shower door* 34" (86.4 cm) - 36" (91.4 cm) - x 70" (177.8 cm)	☐ SH	☐ BH	☐ 0
* Refer to the Fixtures Price Book for the glass options.				

Product Specification:

The fiberglass (FRP) shower stall shall be 35-3/4" (90.8 cm) in length, 36" (91.4 cm) in width, and 76-1/2" (194.3 cm) in height. Shower stall shall be one-piece for installation ease. Shower stall shall have tile-look walls and molded-in floor pattern. Shower stall shall have integral ledges and center drain. Shower stall shall be Kohler Model K-1538-_____.

TERRACINA

Technical Information

Fixture:	
Weight	107 lbs (48.53 kg)
Configuration	1-piece
Drain hole	3-3/8" (8.6 cm) D.

Installation Notes


Refer to installation instructions included with the fixture before beginning installation.

The fixture is not drilled for supply fittings.

Shimming may be required to level the fixture.

Stud opening tolerance is +1/4" (6 mm).

When a fire rated wall is specified, dimensions are to the inside of the wall board. Some shimming between the stud frame and the fixture may be required.

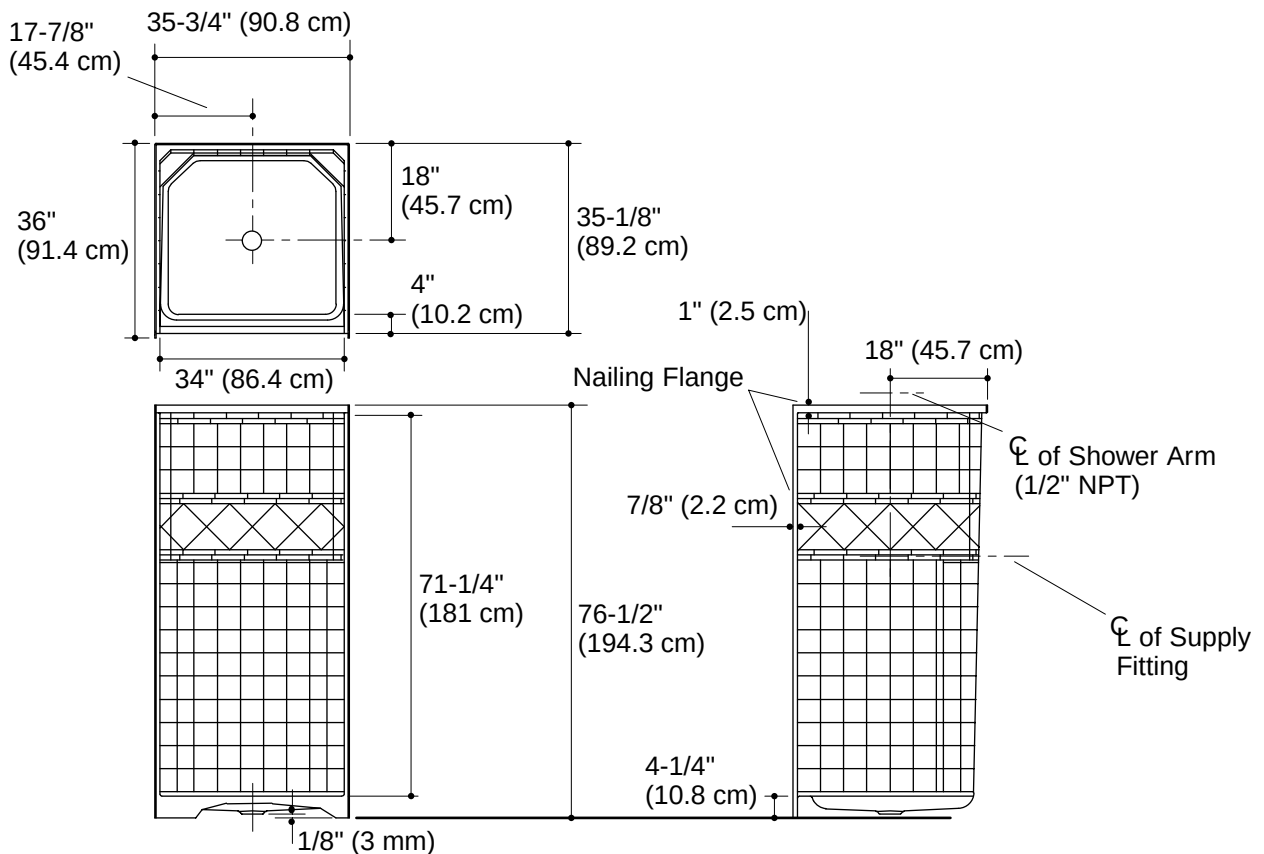

Product Diagram