


### Features

- Vitreous china
- 12" (30.5 cm) rough-in
- 1.6 gpf (6 lpf)
- 2" (5.1 cm) glazed trapway
- Combination toilet
- Less supply
- With Insuliner® insulated tank lining (-U)
- Elongated bowl
- 10-1/4" (26 cm) x 9-1/8" (23.2 cm) water area
- Rim Jet flushing system
- Includes seat with polished chrome hinges and acorn-shaped flush actuator in Black Iron™ finish
- 29-5/8" (75.2 cm) x 20-1/8" (51.1 cm) x 33-3/8" (84.8 cm)

### ELONGATED TOILET K-3463

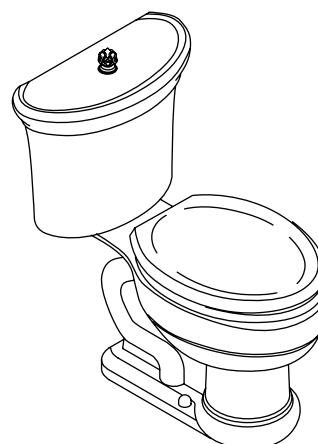

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.2
- Energy Policy Act of 1992

### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

### Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

### Specified Model

Model	Description	Colors/Finishes	
K-3463	Elongated bowl toilet	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-3463-U	Elongated bowl toilet with Insuliner insulated tank lining	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
<b>Recommended Accessories</b>			
K-7637	Angle supply with stop – 3/8" NPT	<input type="checkbox"/> CP	<input type="checkbox"/> PB <input type="checkbox"/> Other_____

### Product Specification

The elongated bowl toilet combination shall be made of vitreous china. The toilet shall be 29-5/8" (75.2 cm) in length, 20-1/8" (51.1 cm) in width, and 33-3/8" (84.8 cm) in height with 10-1/4" (26 cm) x 9-1/8" (23.2 cm) water area. The toilet shall be 12" (30.5 cm) rough-in. The toilet shall have 2" (5.1 cm) glazed trapway. The toilet shall be 1.6 gpf (6 lpf) with Rim Jet flushing system. The toilet shall be less supply. The toilet shall include seat with polished chrome hinges and acorn-shaped flush actuator in Black Iron™ finish. The toilet shall have Insuliner® insulated tank lining (-U). The toilet shall be Kohler Model K-3463-\_\_\_\_\_-\_\_\_\_\_.

# IRON WORKS® HISTORIC™


## Technical Information

Fixture:	
Configuration	two-piece, elongated
Water per flush	1.6 gal (6 L)
Passageway	2" (5.1 cm)
Water area	10-1/4" (26 cm) x 9-1/8" (23.2 cm)
Water depth from rim	6-1/2" (16.5 cm)
Seat post hole centers	5-1/2" (14 cm)

Included components:	
Bowl	K-4355
Tank	K-4401
Tank cover	89970
Seat	K-4665
Tank accessory pack	73062
Bolt cap accessory pack	1013092
Flush actuator	9445-P5

## Installation Notes

Install this product according to the installation guide.

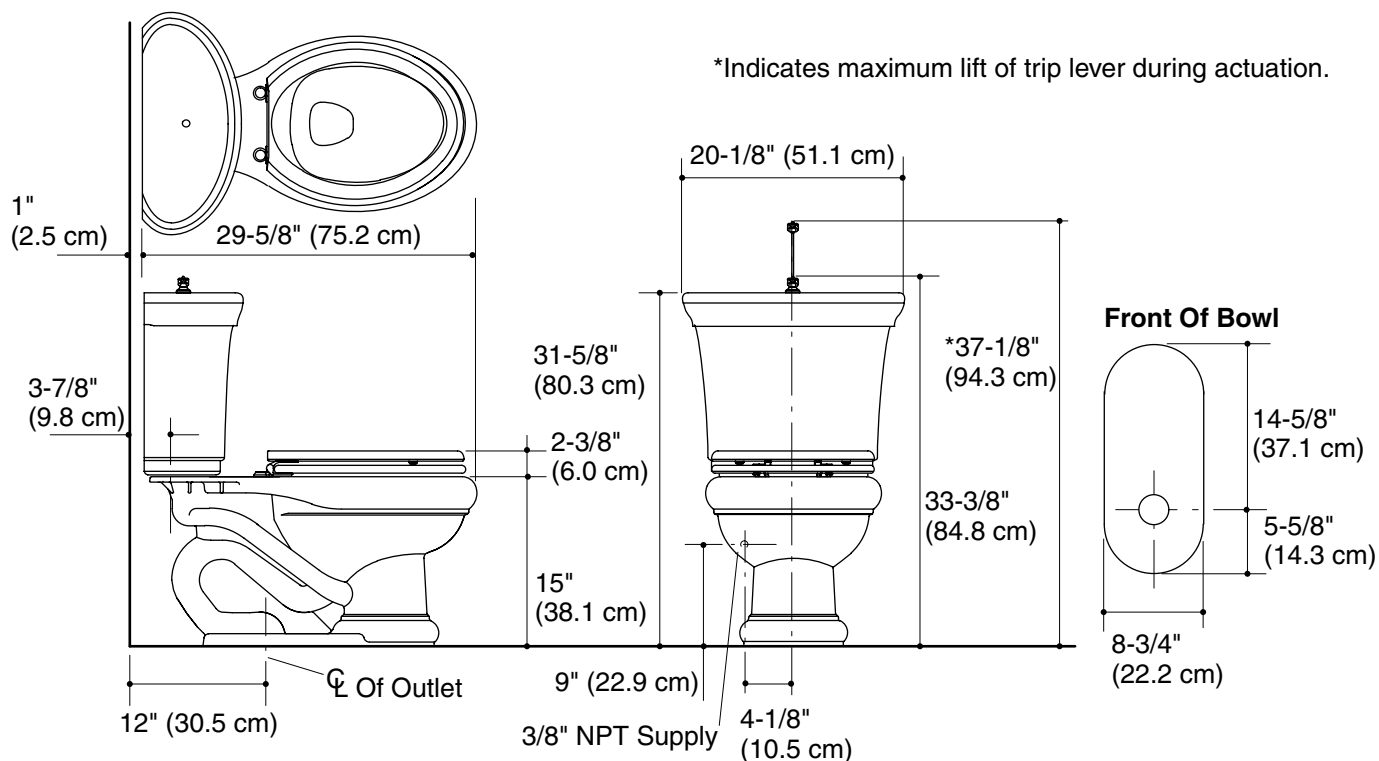

## Product Diagram