

BATH WHIRLPOOL K-1110


Features

- Acrylic
- Coordinating Purist® Suite
- 8 Flexjets™
- Less all trim
- 1.5 hp variable speed pump with 1.5 kW heater and back-lit user keypad
- Deep bathing well 21" (53.3 cm)
- 72" (182.9 cm) x 46" (116.8 cm) x 25-11/16" (65.2 cm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- IAPMO/UPC
- Underwriters Laboratories (UL)
- ASME A112.19.7M

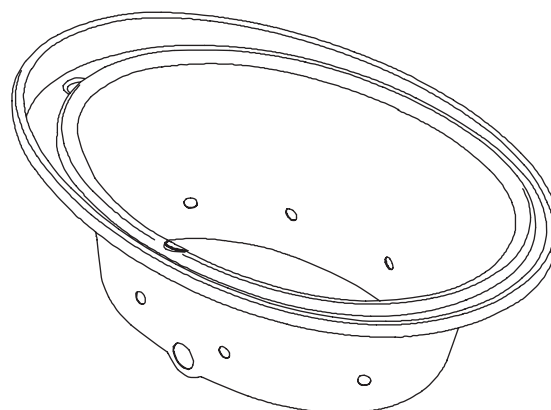

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories:

- CP: Polished Chrome
- PB: Polished Brass
- NA: None applicable
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-1110	Bath whirlpool	☐ 0	☐ Other_____

Required Accessories				
K-589	Undermount template kit (for undermount installations only)			☐ NA
K-7202	Drain	☐ CP	☐ PB	☐ Other_____
K-9698	Jet trim kit	☐ CP	☐ PB	☐ Other_____

Optional Accessories			
K-1491	Pillow	☐ 0	☐ Other_____
K-1601	Footstop	☐ 0	☐ Other_____
K-1703	Remote control		☐ NA

Product Specification

The acrylic bath whirlpool shall be 72" (182.9 cm) in length, 46" (116.8 cm) in width, and 25-11/16" (65.2 cm) in height. Bath whirlpool less all trim shall have a 1.5 hp variable speed pump with 1.5 kW heater, and back-lit user control. Bath whirlpool shall have 8 Flexjets Bath whirlpool overflows into horizontal overflow drain for maximum bathing depth of 21" (53.3 cm). Bath whirlpool shall coordinate with Purist Suite. Bath whirlpool shall be Kohler Model K-1110-_____.

Technical Information

Fixture*:	
Bathing well	
Basin area	45" (114.3 cm) x 25-1/2" (64.8 cm)
Top area	63" (160 cm) x 31-1/2" (80 cm)
Weight	160 lbs (72.6 kg)
To overflow	
Water depth to rim	21" (53.3 cm)
Capacity	115 gal (435.3 L)
* Approximate measurements for comparison only.	

Pump	Heater	V	Hz	A
1.5 hp	1.5 kW	240	50/60	15

Included components:	
Cut-out template (drop-in only)	1016369-7

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Earth-Leakage Circuit-Breaker (ELCB):

Pump/control 220/240 V, 20 A, 50/60 Hz

Installation Notes


Install this product according to the installation guide.

Pump/piping protrudes beyond rim (see below).

Floor support under whirlpool must provide for a minimum of 1400 lbs (635 kg).

Hot water supply should be 70% of capacity or greater. Installations will vary.

No change in measurements with drain shown. (K-7202 or K-7202M)

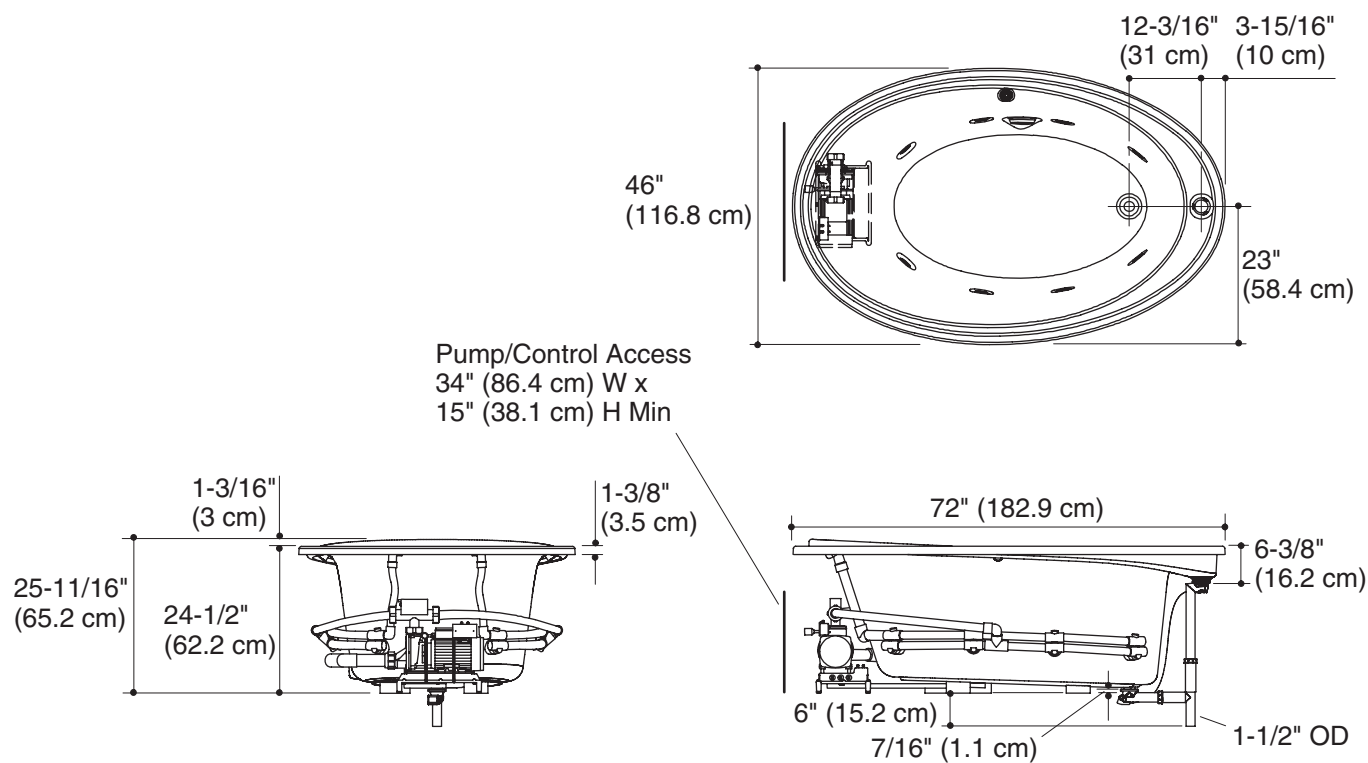

Product Diagram