


### Features

- Cast iron with Safeguard® finish
- UL listed
- Drilled for required grip rails
- 2 hp variable speed pump with 1.5 kW heater, back-lit user keypad and remote control
- 6 Flexjets
- Ten color-matched sequencing Bodyssage™ backjets
- Two pulsating neckjets with pillow
- 240 V, 20 A electrical service
- Color-matched jet trim included
- 66" (167.6 cm) x 36" (91.4 cm) x 23" (58.4 cm)

### 5.5' EXPERIENCE BATH WHIRLPOOL WITH MASSAGE PACKAGE K-856-M

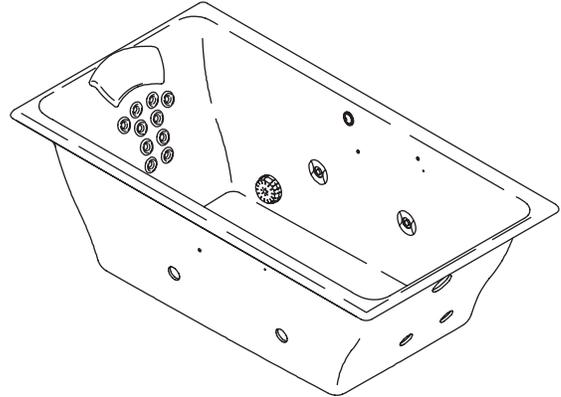

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- IAPMO/UPC
- Underwriter's Laboratories (UL)
- ASME A112.19.1M
- ASME A112.19.7M

### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

### Accessories:

- CP: Polished Chrome
- PB: Polished Brass
- Other: Refer to Price Book for additional colors/finishes

### Specified Model

Model	Description	Colors/Finishes		
K-856-M	Bath whirlpool with Massage Package	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other _____	
<b>Required Accessories</b>				
K-7148-AF	Drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other _____
K-9653	Grip rails (pair)	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other _____
<b>Optional Accessories</b>				
K-1601	Footstop	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other _____	

### Product Specification:

The bath whirlpool shall be 66" (167.6 cm) in length, 36" (91.4 cm) in width, and 23" (58.4 cm) in height. Bath whirlpool shall be made of cast iron with Safeguard® finish. Bath whirlpool shall have 6 Flexjets, 2 hp variable speed pump, 1.5 kW heater, back-lit user keypad and remote control. Bath whirlpool shall have 10 color-matched sequencing Bodyssage backjets and 2 pulsating neckjets with pillow. Bath whirlpool shall be UL listed. Bath whirlpool shall be drilled for K-9653 grip rails (required). Bath whirlpool shall be Kohler Model K-856-M-\_\_\_\_\_.

# TEA-FOR-TWO™

## Technical Information

Fixture*:	basin area	top area	weight
Bathing well	42" (106.7 cm) x 25" (63.5 cm)	58" (147.3 cm) x 29" (73.7 cm)	510 lbs (231.3 kg)
	water depth	capacity	
To overflow	18" (45.7 cm)	96 gal (363.4 L)	
* Approximate measurements for comparison only.			

Pump	Heater	Voltage	Frequency	Amperage
2 HP	1.5 kW	240 V	50/60 Hz	15 A

Drop-in cut-out	65-1/2" (166.4 cm) x 35-1/2" (90.2 cm) Max
-----------------	--

## Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Earth-Leakage Circuit-Breaker (ELCB):	
Pump/control	220-240 V, 20 A, 50/60 Hz

## Installation Notes

Install this product according to the installation guide.


Floor support under whirlpool must provide for a minimum of 2000 lbs (907.2 kg).

Cast iron whirlpools are extremely heavy, making some drop-in installations difficult. Splitting the deck/surround is recommended if installing into a deck.

Pump/piping protrudes beyond rim (see below).

Hot water supply should be 70% of capacity or greater. Installations will vary.

No change in measurements with drain shown. (K-7148-AF or K-7148M-AF)

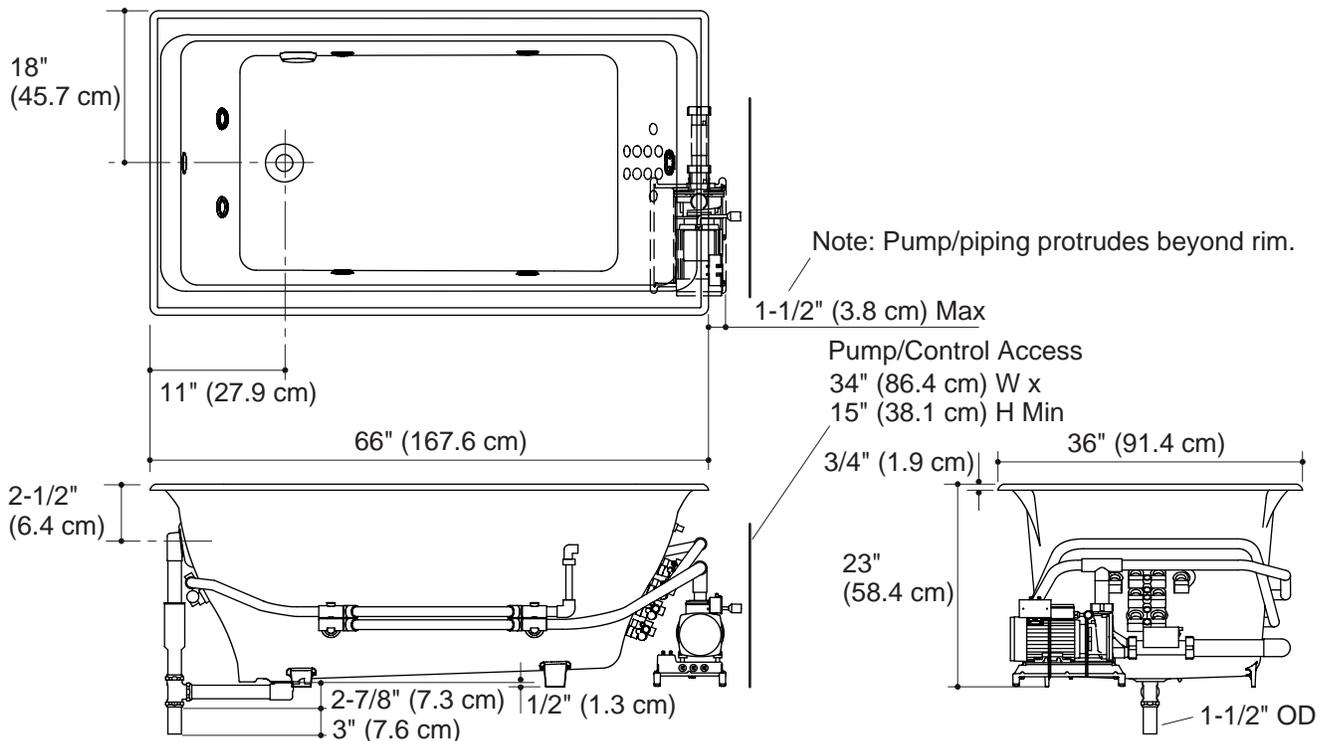

## Product Diagram