


type

pathways sconce	series#	lampping	dimensions	diffuser	finishes	options
	<b>2-5113</b>	2 x 26W quad 4-pin fluorescent (G24q-3)	W = 13.63" H = 14.88" D = 4"	<b>2</b> matte white acrylic	<b>24</b> satin nickel <b>14</b> polished chrome <b>95</b> old world	<b>*EM</b> integral emergency ballast (2-5118 series only)
	<b>2-5117</b>	2 x 13W quad 4-pin fluorescent (G24q-1)		<b>3</b> tobacco acrylic		
	<b>2-5118</b>	2 x 13W quad 4-pin fluorescent (G24q-1)		<b>4</b> faux onyx acrylic		
				<b>6</b> silver cloth acrylic		
				<b>7</b> wave acrylic		
				<b>8</b> leaf acrylic		

**general specifications**

- Cold rolled steel housing and trim.
- Acrylic diffusers are 1/8" thick, finish as specified.
- All items U.L and C.U.L. approved for dry locations.
- Ballasts: 2-5113 series is electronic, NPF, rapid start, 120V. 2-5117, 2-5118 series are electronic, HPF, instant start, 120V.
- All units mount to standard 4" octagonal junction box. Unless otherwise noted, no additional supports required.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen lighting reserves the right to modify designs at any time.
- \* Unless otherwise specified, a Bodine ballast will be used. Only EM ballasts that match an 'F-can' hole pattern may be installed.
- **To avoid possible abnormal end of life, use lamps with integral End of Life protection.**

**optional diffuser finishes**

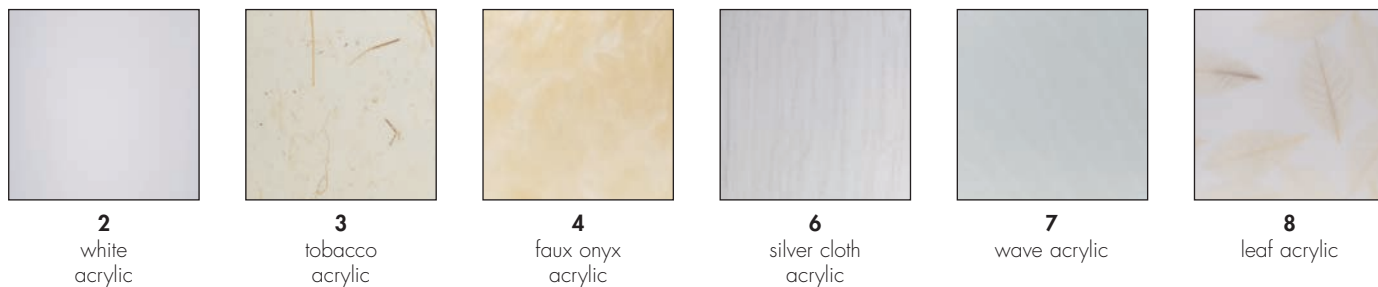

**sample catalog number**

series #	diffuser	finish	options	catalog number
<b>2-5113</b>	<b>- 8</b>	<b>14</b>	<b>-</b>	<b>= 2-5113-814</b>
pathways sconce, 2 x 26W cfl	leaf acrylic	satin nickel	none	

