


Mega Bulb

DIMENSION

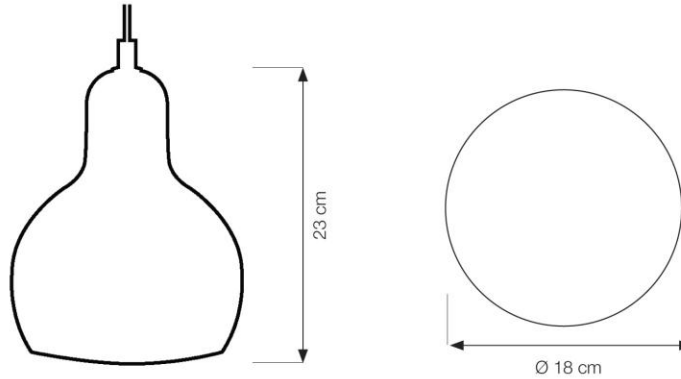

TECHNICAL INFO

Only indoor use
E60
max. 100 Watt
2,5 m Cable

BOX



H: 27 cm
B: 29,5 cm
D: 19,5 cm

*US dimensions: 7" diameter x 9" height, 7 ft cable, 4 3/8" diameter white domed ceiling rosette

US Installation Instructions

We recommend installation by a specialist.

1. Before connecting the lamp, be sure that there is no voltage in the feeding conductors coming from the electrical mains. Remove the fuse or switch off the main.
2. Always use the recommended bulb. Max 75 Watt E26 globe, spot or regular incandescent
3. Separate the ceiling canopy cover from the cylinder.
4. Screw the cylinder onto the junction box, with the 2 electrical wires threaded through the opening into the canopy
5. Pull the electrical cable of the lamp through the center hole of the canopy cover with the thread of the screw facing away from the lamp and adjust lamp height by cutting cable at desired level. Over 7 ft of wire is provided.
6. Join the two electrical connections and properly insulate them
7. Securely screw the cylinder to the canopy cover with the screws provided.