


INSTALLATION SHEET

Safety, Warnings and Suggestions

- ¹ *Care* should be taken not to position fixtures in locations where bare skin can come into contact with the potentially high temperatures on the lens.
- ² *Make* sure that electrical power is disconnected before any work is performed.
- ³ *All* gaskets and sealing surfaces must be kept clean during installation.
- ⁴ *All* wiring and installation should meet local, state and national electrical codes.
- ⁵ *Install* correct lamp type and wattage.

MOUNTING INSTALLATION

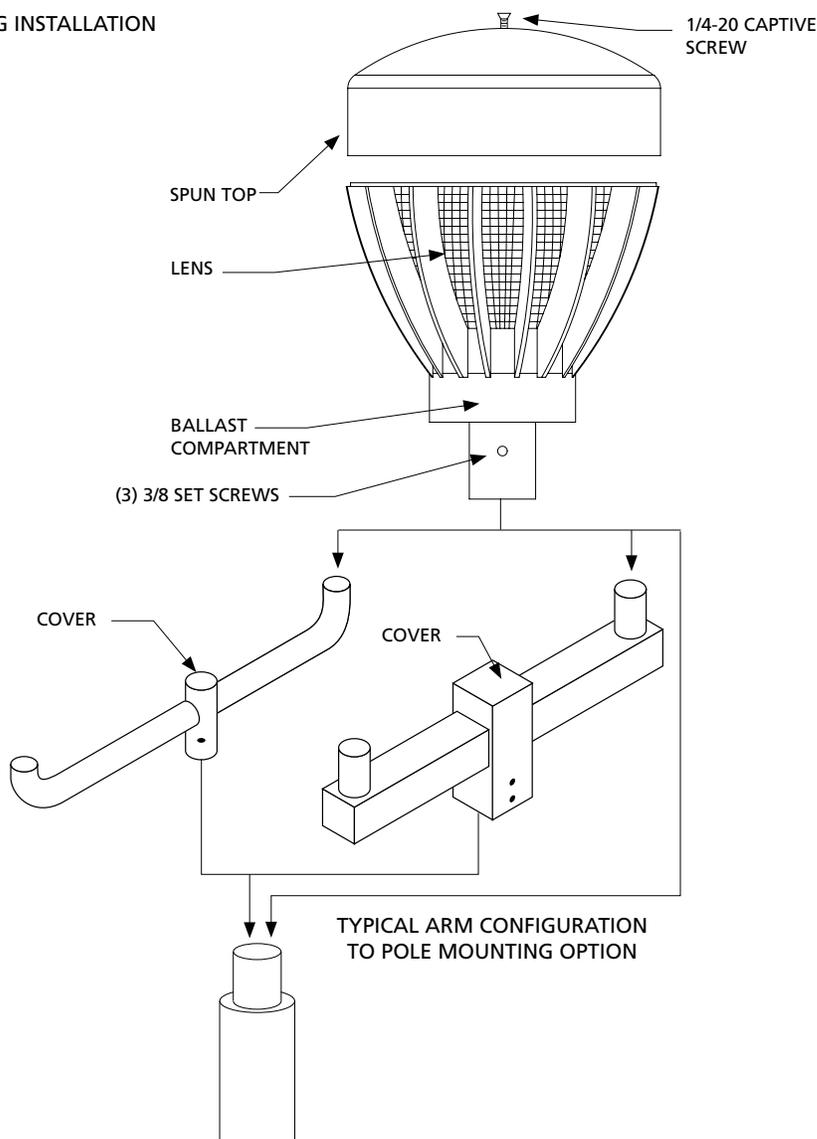

1. (POST TOP INSTALLATION)
Remove the fixture from the box and install to the 2 3/8" - 4" O.D. pole top tenon. Secure the fixture to the tenon with the (3) set screws provided with the unit.
2. Make power and ground connections using UL approved connectors at the top of the pole section
3. Remove the top spinning by removing the (1) 1/4-20 captive screw at top of unit. Install the correct lamp, reinstall the spun top, and retighten the captive screw.