



HERE®

OPTIONAL GERE PACKS

Assembly Instructions


**HGERE4A (Anthracite Gere's)
HGERE4C (Clear Gere's)**

Parts List

Qty.	Part No.	Description
4	012-0662	Geres (Anthracite)
4	012-0669	Geres (Clear)

Hardware List

Qty.	Ref.	Part No.	Description
4	AA	030-0669	1/4-20 x 2 1/4" Socket Hd. Cap Screw
4	BB	012-0661	Table Connector Mount
1		030-0397	3/16 Allen Wrench

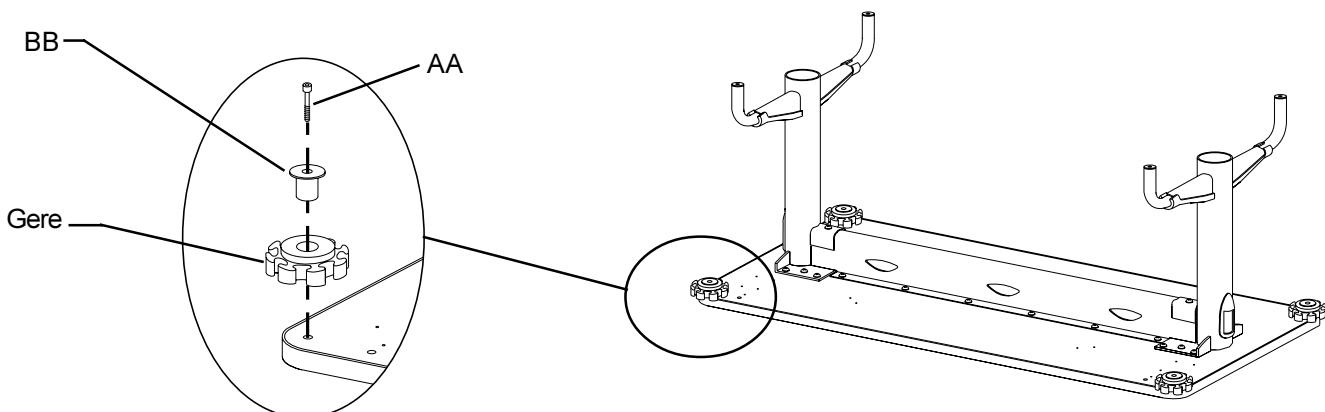

Install four sets of Gere Connecting Systems as follows. Insert 1/4-20 x 2 1/4" long socket head screw (AA) into the Table Connector Mount (BB). Slip the Table Connector Mount (with the screw) into the Gere as shown (be sure to orientate all Gere's the same way). Attach Gere assembly to each corner of the table using supplied Allen Wrench.

Bretford
11000 Seymour Avenue
Franklin Park, IL 60131
TEL: 847.678.2545
800.521.9614
FAX: 847.678.0852
800.343.1779

Bretford Ltd.
Technology House
2 Etongate, 110 Windsor Road
Slough, Berkshire SL1 2JA England
TEL: 01753 53 99 55
FAX: 01753 53 94 78