



LSI, INC.
500 HUDSON VALLEY AVENUE
New Windsor, NY 12553
(845) 220-3200

CFL SLOPE CEILING ADAPTER INSTRUCTION SHEET

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

WARNING: ELECTRICAL SHOCK POTENTIAL! DO NOT ATTEMPT TO INSTALL, MAINTAIN OR RELAMP WITHOUT DISCONNECTING ALL POWER. FAILURE TO DISCONNECT POWER CAN RESULT IN ELECTROCUTION, SHOCK OR SEVERE BURNS.

THIS DOCUMENT IS THE PROPERTY OF LSI, INC. IT CONTAINS PROPRIETARY INFORMATION AND IS TENDERED SUBJECT TO THE CONDITIONS THAT IT AND THE INFORMATION DISCLOSED HEREIN BE RETAINED IN CONFIDENCE. IT CANNOT BE REPRODUCED OR COPIED DIRECTLY OR INDIRECTLY IN WHOLE OR IN PART, AND TO OTHERS FOR USE FOR ANY OTHER PURPOSE EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LSI, INC.

CAUTION: THIS FIXTURE IS DESIGNED FOR PERMANENT INSTALLATION IN ORDINARY (NON-HAZARDOUS) LOCATIONS IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE AND ALL APPLICABLE LOCAL CODES. DO NOT USE IN AREAS OF LIMITED VENTILATION OR IN HIGH AMBIENT ENCLOSURES. THE LAMP AND FIXTURE OPERATE AT HIGH TEMPERATURES, CONTACT WITH COMBUSTIBLE MATERIALS CAN CAUSE FIRE AND PERSONAL CONTACT CAN CAUSE SEVERE BURNS.

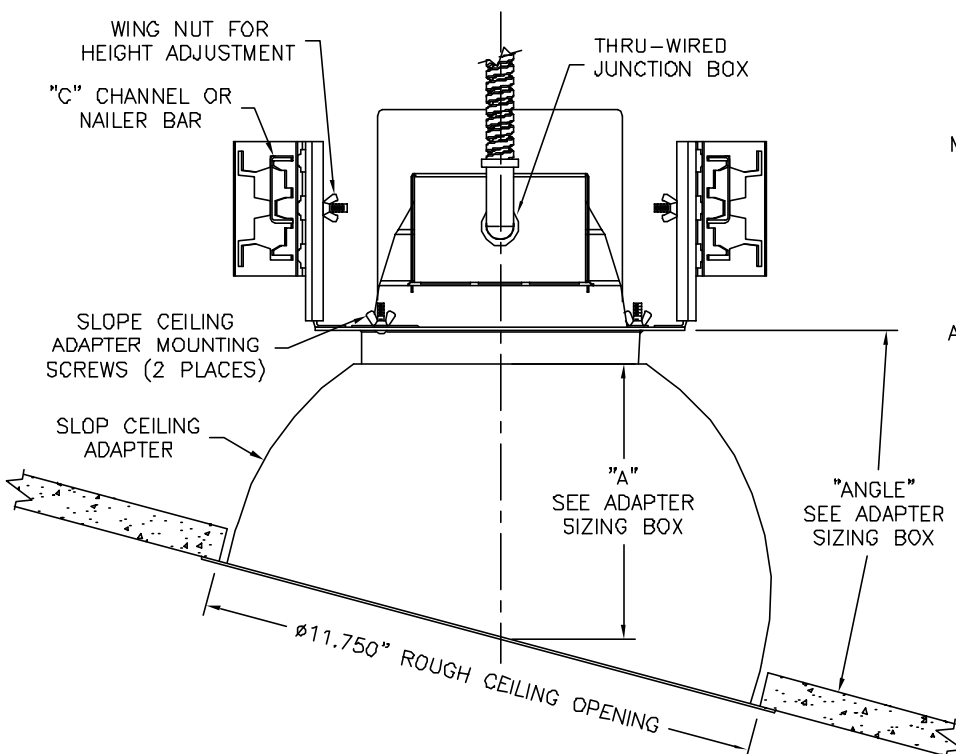


FIG. 1A


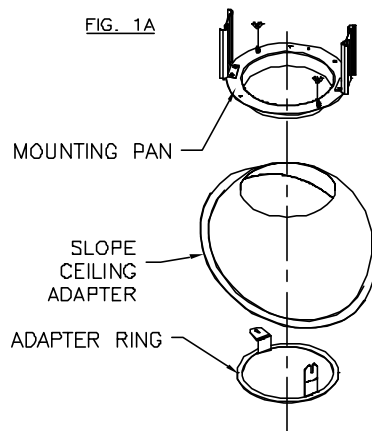


FIG. 1B

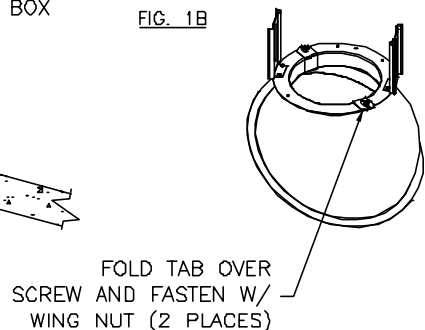

FIXTURE SERIES	ADAPTER SIZE	DIM "A"	"ANGLE"
206	ø6"	4.750"	10° TO 45°
208	ø8"	4.125"	10° TO 30°

IMPORTANT: READ THE FOLLOWING INSTRUCTIONS CAREFULLY BEFORE INSTALLING FIXTURE.

1. INSTALL PRE-CUT MOUNTING CHANNELS OR BAR HANGERS INTO APPROPRIATE SLOTS OF ADJUSTABLE MOUNTING BRACKETS AND INSTALL MOUNTING PAN INTO CEILING FROM ABOVE AT DIMENSION "A" ABOVE CEILING. MOUNTING PAN MUST BE LEVEL WITH FLOOR.
2. RUN RIGID CONDUIT AND BUILDING WIRES (BY OTHERS) TO THRU-WIRED JUNCTION BOX. MAKE ELECTRICAL CONNECTIONS AND GROUND LUMINAIRE USING GROUND WIRE PROVIDED IN JUNCTION BOX.
3. CUT OPENING IN CEILING FOR SLOPED CEILING ADAPTER.
4. ASSEMBLE SLOPE CEILING ADAPTER TO MOUNTING PAN WITH TWO (2) SCREWS AS SHOWN IN ILLUSTRATION. (SEE DIAGRAM 1A AND 1B FOR SLOPE CEILING ADAPTER ASSEMBLY)
5. MAKE FINAL ADJUSTMENT BRINGING SLOPE ADAPTER FLANGE FLUSH WITH CEILING AND INSTALL REFLECTOR/TRIM CONE.
6. LAMP LUMINAIRE WITH THE APPROPRIATE LAMP.