



LXW2 Revit Installation Instructions

- Download the LXW2 Light Fixture & the LXW2 Pendant Mount files
- Load into Revit Project
- Place LXW2 Pendant Mount in the desired location on ceiling surface
- Switch to a side elevation view

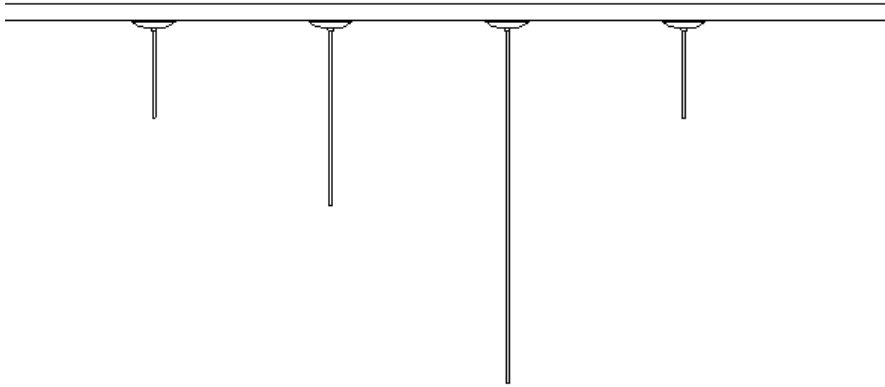


- Draw Reference Planes (located in the “Work Plane” section of the Arch Tab) indicating the rotational axis of the fixture/mount. This will be made clear by floating reference lines from the pendant family

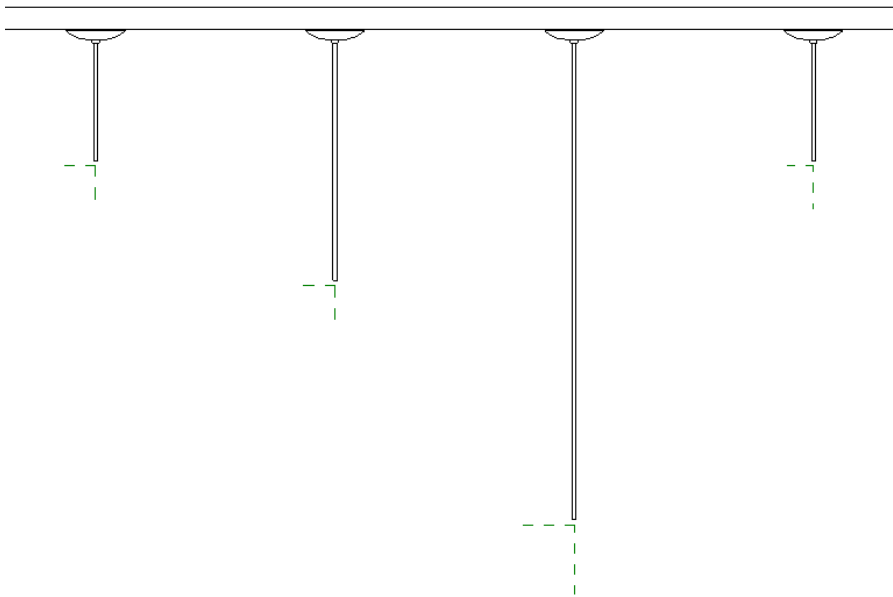


- Switch back to a ceiling plan view


- From this view place the LXW2 Light Fixture centered over the pendant mount

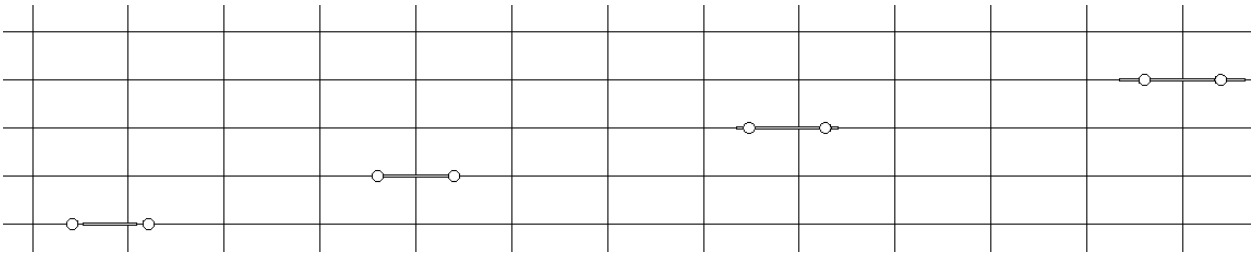


- Select the pendant mount and adjust its' Length to match the Length of the LXW2 Light Fixture

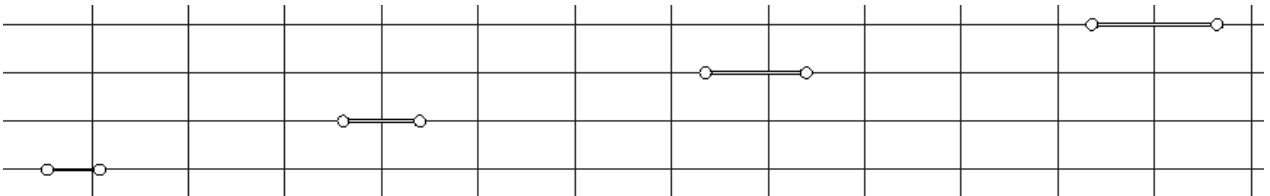

- Switch back to the side elevation

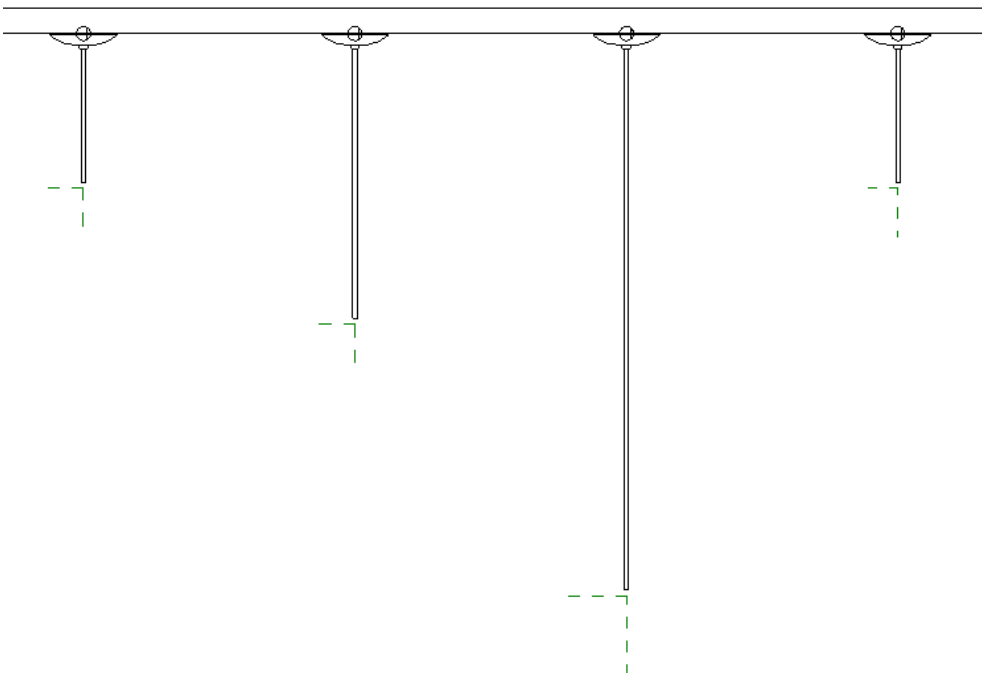


- Select the LXW2 Fixture
- From the "Modify|Lighting Fixtures Tab" select "Edit Work Plane"

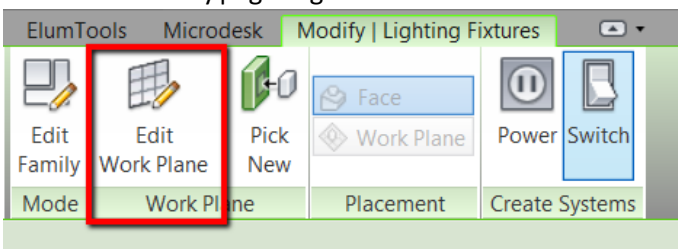


- When the dialog box opens select "Pick a Plane" ---> OKAY


- Select the horizontal reference plane

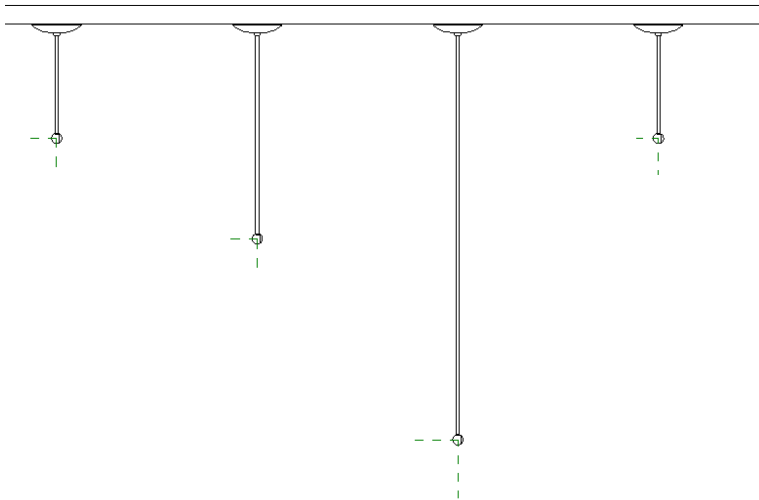



- Use the “Align - AL” tool from the “Modify Tab” to Align & Lock the LXW2 fixture to both the horizontal and vertical reference planes
- Once fixture is locked to both planes use “Ctrl” to select both planes at once
- Navigate to the “Modify Tab” and select the “Rotate – RO” tool
- Select the “Place” option and choose the intersection of the reference planes

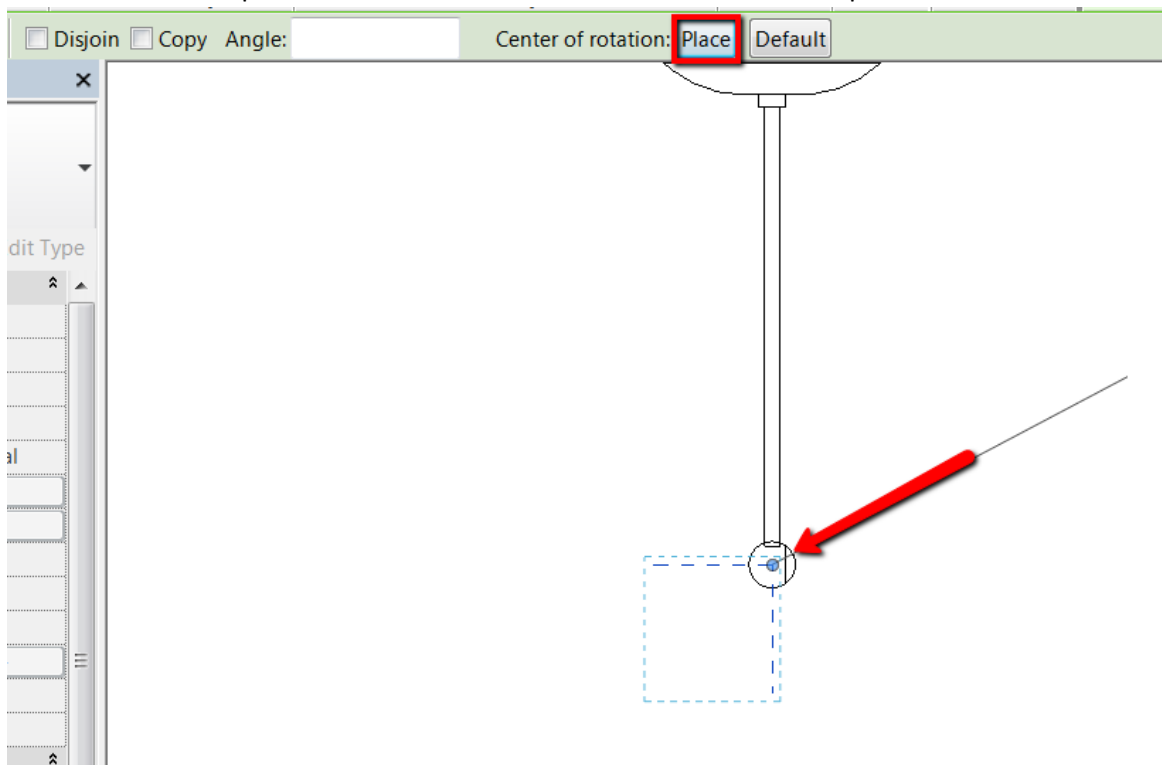

- Click to start the rotation then drag to place or enter the desired angle value

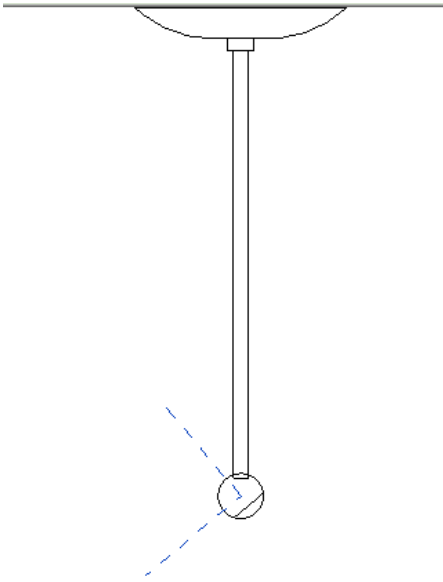

- Turn on “Light Source” in Visibility Graphics to see rotation more clearly and direct light in desired location

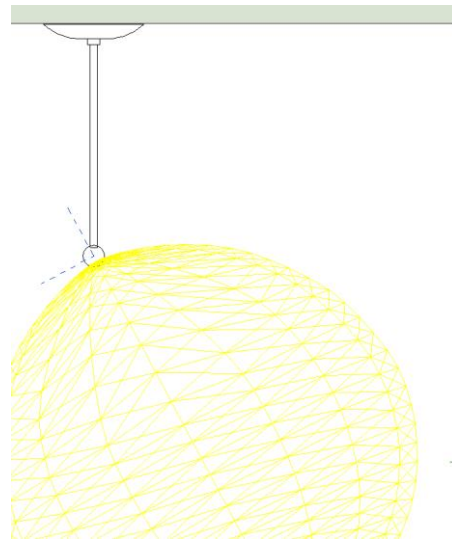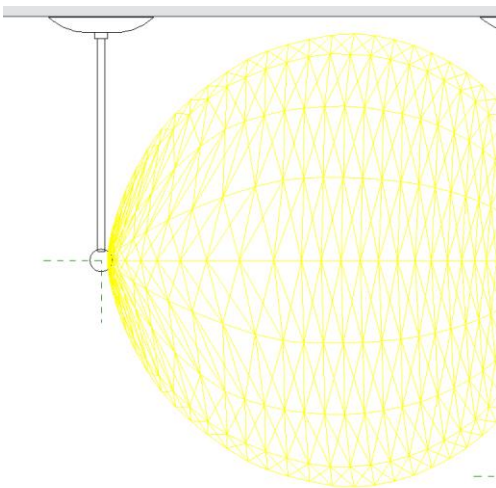

*****KEEP IN MIND. TILT ANGLE IS LIMITED TO MANUFACTURER SPECS. FIXTURE ADJUSTS FROM 0° TO 350°.**

