




CB6 HIGH
EMERGENCY
LIGHT

- FEATURES**
- Dual 120/277 VAC 60Hz input
 - Line latched, solid state voltage regulated charger
 - Sturdy, impact-resistant steel housing
 - Universal mounting knockout pattern
 - PAR36 type heads with glare-free lens
 - Fully adjustable lamp housing available
 - Sealed, maintenance-free, long-life lead calcium battery
 - Standard white powder-coat finish; available in black

Compliances may not apply to all product configurations. Please consult the product spec sheet for compliance details.
COMPLIANCES: UL924 Listed; NFPA 101 Compliant, NYC Code Compliant

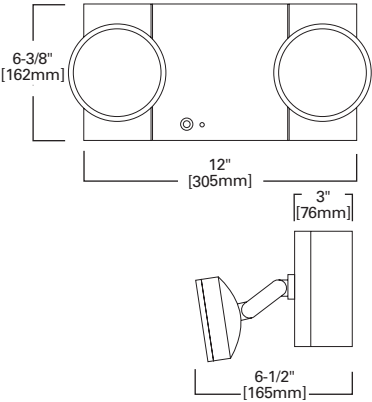

ORDERING INFORMATION - NEW YORK CITY / NATIONAL

Family	Capacity in Watts (Hours)				Number of Heads	Watts per Head	Lamp Type	Replacement Lamp	Self Diagnostic	Shipping Weight
	1.5	2	3	4						
6 VOLT										
CB6	27	24	18	14	2	12	Incandescent	6RW12	No	13
CB6-54	54	36	27	18	2	12	Incandescent	6RW12	No	13
CB6-54-3	54	36	27	18	3	12	Incandescent	6RW12	No	13
CA6	27	24	18	14	2	12	Incandescent	6RW12	Yes	13
CA6-54	54	36	27	18	2	12	Incandescent	6RW12	Yes	13
CA6-54-3	54	36	27	18	3	12	Incandescent	6RW12	Yes	13
12 VOLT										
CB12	27	22	18	–	2	12	Incandescent	12RW12	No	14
CB12-54	54	36	27	18	2	12	Incandescent	12RW12	No	14
CB12-54-3	54	36	27	18	3	12	Incandescent	12RW12	No	14
CA12	27	22	18	–	2	12	Incandescent	12RW12	Yes	14
CA12-54	54	36	27	18	2	12	Incandescent	12RW12	Yes	14
CA12-54-3	54	36	27	18	3	12	Incandescent	12RW12	Yes	14

OPTIONS AND ACCESSORIES

Options: Add to catalog number Description	Code	Accessories: Add to catalog number Description
Voltmeter (1)	V	Wire Guards (consult factory)
Ammeter (1)	A	
Time Delay	TD	
12 Volt Operation	12	
Diagnostic Option	CA6	

HALOGEN LAMP OPTIONS

*Only available with OS Head

Unit	Watt Lamp Only	Replacement Lamp Number
6 Volt (all units)	12	6 HB 12*
6 Volt (all units)	20	6 HB 20*

Notes: N.Y.B.S.A. Calendar (approval) #34013.
(1) Units may NOT be equipped with a voltmeter and ammeter at the same time.

Specifications and dimensions subject to change without notice. Consult your Cooper Lighting Representative or visit www.cooperlighting.com for available options, accessories and ordering information.