




DLII - Fixed Round Compact RECESSED DOWNLIGHT

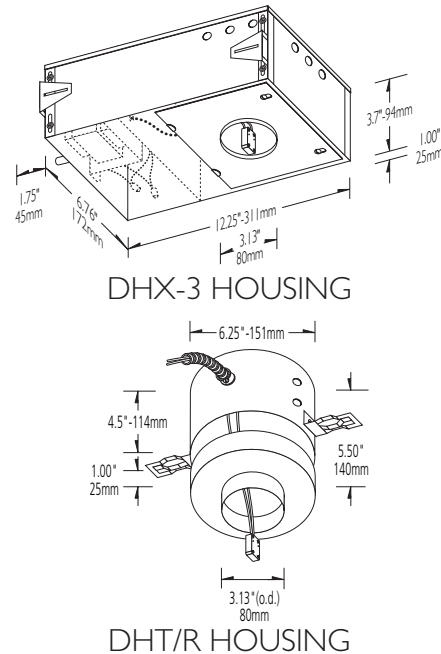

PRODUCT SPECIFICATION

Cat. No.	Finish
DLIIW	Matte White
DLIIB	Matte Black
DLIIC	Polished Chrome
DLIIG	Polished Brass

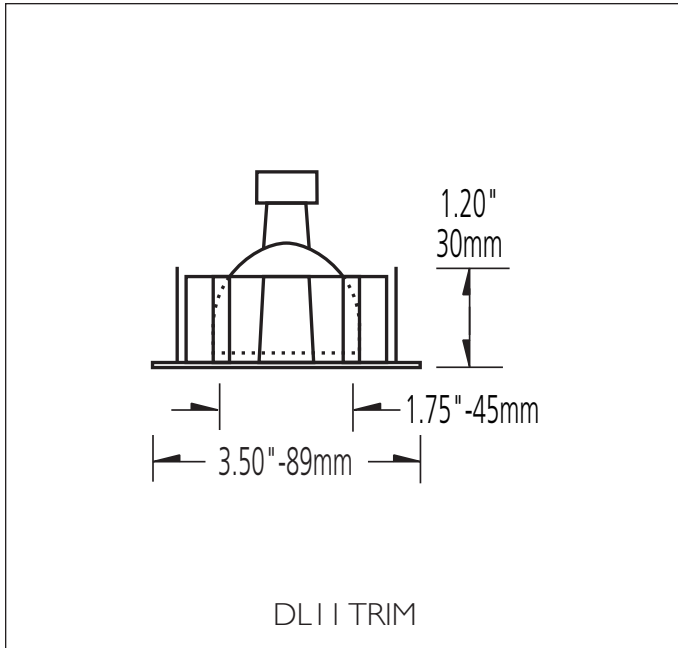

GENERAL DESCRIPTION

Lucifer recessed downlight is a fixed low voltage fixture with **flush trim plate**. Fixed die-cast round fitting with shallow lamp recess and round interior trim plate. Round opening. Uses a quartz halogen lamp for superior color rendition and beam control. Clear glass lens is supplied with fixture.

MOUNTING

Use with **DHX-3** housing with integral magnetic or electronic transformer for non-IC, accessible ceilings only. Use with **DHT/R** housing and remote transformer for non-IC, accessible ceilings only. DHT/R housing includes 5 foot conduit with leads and pre-wired mating connectors for quick trim connection. Hanging bars and brackets are included.

MATERIAL

Trim is constructed of steel. Fixture housing is riveted aluminum.

ACCESSORIES

Trim may be accessorized with Frosted Glass Lens (FGL-1), Linear Spread Lens (LSL-1), MR-11 Lamp Adapter (LA), Honeycomb Louvre (HCL-1), Spread Glass Lens (SGL-1), Ultra Violet Glass Lens (UVL-1), and Black Louvre (LVR).

LABEL

U.L. Listed trim and housings for dry and damp, non-IC locations. Accessible ceilings only. File No. E115025.

ELECTRICAL

Trim is pre-wired for use in housing assembly.

TRANSFORMER

DHX-3 housing is supplied with an integral 120v or 277v primary, 12v secondary magnetic transformer or 120v primary, 12v secondary electronic transformer. DHT/R housing is powered by remote transformer sized to load (order separately). Standard 120v primary, 12v secondary. All transformers are fully dimmable.

LAMP

12v MR-16 halogen lamp, 50w maximum (order separately). Specify lamp beam spread.

ENERGY CONSERVATION

Manufacturer recommends use of Osram Sylvania's energy saving 37w Tru-Aim® IR halogen lamps which convert more energy into light than conventional 50w MR-16 lamps. Tru-Aim® IR halogen lamps can be ordered from Lucifer Lighting for use in fixture. See luciferlighting.com for lamp specification guide.

WARRANTY

Manufacturer's one year warranty of product is conditioned on use of manufacturer supplied transformers.

LUCIFER
LIGHTING COMPANY

414 Live Oak Street
San Antonio, Texas 78202
Phone 210 227-7329
FAX 210 227-4967
www.luciferlighting.com

©2004 Lucifer Lighting Company

As part of its policy of continuous research and product development, the Company reserves the right to change or withdraw specifications without prior notice.

0940-1004