CONNECTRAC IN-CARPET WIREWAY



ARCHITECTURAL SOLUTIONS FOR POWER AND CONNECTIVITY

Connectrac In-Carpet Wireways offer discrete and elegant power and technology connectivity in interior spaces of all kinds. They combine an extruded aluminum central wireway flanked by ultra-low sloping floor transition ramps, creating a subtle, powerful and beautiful cable pathway solution for virtually any need. Extremely durable and flexible, Connectrac In-Carpet Wireways comply with the ADA and offer a multitude of power options and telecom capabilities. Connectrac is the best alternative for open space connectivity when aesthetics, flexibility and value are important.


IN-CARPET WIREWAY FEATURES

- Low-profile, durable extruded aluminum wireway
- Moisture-resistant MDF floor transition ramps
- Provides a cable pathway with no core drilling or trenching
- Multitude of power and telecom/AV options
- Pre-wired power components speed installation
- Removable wireway top cap makes changing cables simple
- ADA compliant
- Multiple finishes available





IN-CARPET WIREWAY COMPONENTS

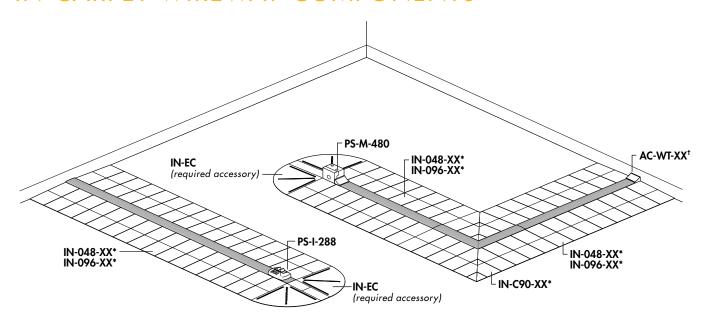


BASE SYSTEM COMPONENTS

WIREWAY SEGMENTS AVAILABLE IN:

- 48" and 96" lengths field-cut to required length and combined as necessary
- Top cap available in 2 finishes: Clear Anodized Aluminum (AL), or Graphite (GR)

EACH SEGMENT INCLUDES:

- Extruded Aluminum Wireway Base Track And Top Cap
- Moisture-Resistant MDF Floor Transition Ramps
- · Wire Management Clips
- Concrete Screws And Drill Bit

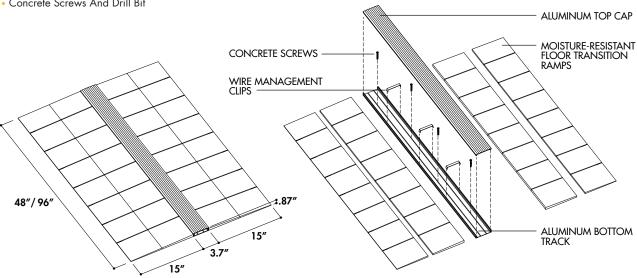

PART NUMBER	DESCRIPTION	PRICE
IN-048-XX*	48" Segment: 48" Wireway And Transition Ramps	\$198.48
IN-096-XX*	96" Segment: 96" Wireway And Transition Ramps	\$396.95

^{*}Top Cap Finishes: Replace "XX" With "AL" (Clear Anodized Aluminum), or "GR" (Graphite powder coat) †Accessory Finishes: Replace "XX" With "BK" (Black) or "SV" (Silver)

WIREWAY COMPONENTS AND ACCESSORIES


BASE SYSTEM COMPONENTS:



WIREWAY BOTTOM TRACK AND TOP CAP

- Bottom track anchors to slab
- Top cap snaps into bottom track
- Extruded aluminum
- Available lengths: 48" / 96"

INCLUDED IN EACH WIREWAY SEGMENT




SIDE TRANSITION RAMPS

- Adheres to slab with construction adhesive
- Moisture-resistant MDF
- Available lengths: 48" / 96"

INCLUDED IN EACH WIREWAY SEGMENT

REQUIRED ACCESSORY:




END TRANSITION RAMPS

 Moisture-resistant MDF and molded ABS plastic

PN: IN-EC | \$26.49


OPTIONAL ACCESSORIES:



TRANSITION ADAPTER

- Used to transition cabling at beginning or end of wireway
- Snaps into wireway bottom track


PN: AC-WT-BK (BLACK) | \$20.56 AC-WT-SV (SILVER) | \$20.56



GROMMET

- · Allows cabling to enter / exit wireway
- Snaps into wireway bottom track


PN: AC-GR-BK (BLACK) | \$15.89 AC-GR-SV (SILVER) | \$15.89



COMMUNICATION BOX

- Steel low-voltage enclosure
- · Accepts any standard double-gang faceplate
- 3" available depth


PN: IN-COM | \$84.24



45° CORNER KIT*

- Pre-cut wireway and ramp components
- Adds 24" to existing system


PN: IN-C45-XX* | \$179.60



90° CORNER KIT*

- Pre-cut wireway and ramp components
- Adds 40" to existing system

PN: IN-C90-XX* | \$179.60




ROUGH-IN BOX

 Optional component used in new wall construction to transition cabling from wall cavity into wireway

PN: AC-RIB-1 | \$13.12

^{*}Top Cap Finishes: Replace "XX" With "AL" (Clear Anodized Aluminum), or "GR" (Graphite powder coat)


WIREWAY ACCESSORIES



20" WALL CHANNEL

- Vertical wireway, surface-mounts to wall to provide path from Connectrac system at floor to surface-mounted junction box
- 20" long, can be trimmed to fit
- Includes 4"x4"x2.125" double-gang steel junction box, with silver powder coat
- Includes (2) AC-WT-SV and (1) AC-GR-BK


PN: AC-WC-020-AL | \$102.67



SIDE ENTRY KIT*

- Allows cabling to enter side of wireway instead of end
- Adds 12" to existing system

PN: IN-SE-1-XX* | \$101.68




144" WALL CHANNEL

- Vertical wireway, surface-mounts to wall to provide path from Connectrac system at floor to ceiling above
- 12' / 144" Length
- Includes (1) AC-WT-SV accessory

PN: AC-WC-144-AL | \$247.99

^{*}Top Cap Finishes: Replace "XX" With "AL" (Clear Anodized Aluminum), or "GR" (Graphite powder coat)

SINGLE DEVICE POWER OPTIONS




DUPLEX

INCLUDES:

- Single 3-wire, 1-circuit NEMA 5-20R duplex receptacle
- Attached pre-wired galvanized steel flex conduit; 3-wire / 1-circuit with 1/2" knockout fitting (length options below)
- Black ABS plastic cover w/2 mounting screws
- Modular data opening (see page 7)
- Need an ASHRAE or Title 24 controlled receptacle?
 Contact us at 877.480.5637 or info@connectrac.com!

PART NUMBER	DESCRIPTION	PRICE
PS-I-144	20Amp Duplex Receptacle; 144" Infeed	\$266.74
PS-I-288	20Amp Duplex Receptacle; 288" Infeed	\$374.71
PS-I-480	20Amp Duplex Receptacle; 480" Infeed	\$513.37




AV DUPLEX

INCLUDES:

- Steel enclosure with access cover
- Single 3-wire, 1-circuit NEMA 5-20R duplex receptacle
- Attached pre-wired galvanized steel flex conduit; 3-wire / 1-circuit with1/2" knockout fitting (length options below)
- Standard double gang telecom opening; 3" depth for installing AV plates/devices
- Need an ASHRAE or Title 24 controlled receptacle?
 Contact us at 877.480.5637 or info@connectrac.com!

PART NUMBER	DESCRIPTION	PRICE
PS-A-144	.20Amp Duplex Receptacle; 144" Infeed	.\$351.17
PS-A-288	.20Amp Duplex Receptacle; 288" Infeed	.\$427.68
PS-A-480	.20Amp Duplex Receptacle; 480" Infeed	.\$528.60




4-CIRCUIT MONUMENT

INCLUDES:

- Single 36.5 cubic inch steel electrical housing for hardwire connection, black powder coat
- Attached pre-wired galvanized steel flex conduit; 8-wire / 4-circuit with 1/2" knockout fitting (length options below)
- Pass-thru opening for telecom cabling
- Refer to page 9 for wiring diagram options

PART NUMBER	DESCRIPTION	PRICE
PS-M-288	.8-wire, 4-circuit box for furniture hardwire; 288" infeed	\$499.05
PS-M-480	8-wire 4-circuit box for furniture hardwire: 480" infeed	\$577 20

NOTE: SEE MORE POWER OPTIONS ON NEXT PAGE

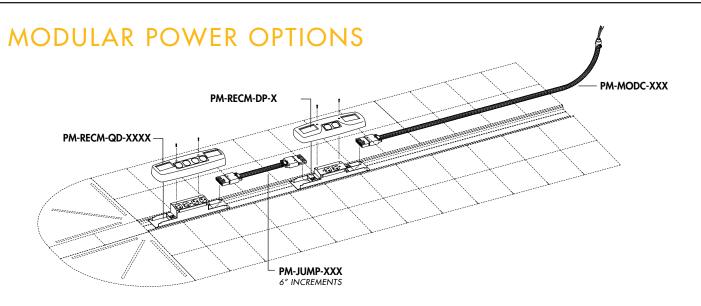



MODULAR POWER SYSTEMS

- 20Amp NEMA 5-20R duplex or quad receptacles; includes black ABS plastic cover, mounting screws, and two modular data openings (see page 8).
- Modular connections: multiple receptacle units can be connected using modular jumper and power infeed cables.
- Receptacle devices are keyed to individual circuits.
- Need an ASHRAE or Title 24 controlled receptacle? Contact us at 877.480.5637 or info@connectrac.com!
- MAX DATA CAPACITY: 6 communications cables can bypass each modular receptacle. Need to accommodate more than 6? We can help! Contact us at at 877.480.5637 or info@connectrac.com.

MODULAR DUPLEX (PN: PM-RECM-DP-X)

MODULAR QUAD (PN: PM-RECM-QD-XXXX)





PART NUMBER	DESCRIPTION	PRICE
PM-MODC-288	. 8-Wire Modular Power Infeed, 144" Length	.\$430.66
PM-RECM-DP-2 PM-RECM-DP-3 PM-RECM-DP-4 PM-RECM-QD-1111 PM-RECM-QD-2222 PM-RECM-QD-3333 PM-RECM-QD-4444 PM-RECM-QD-1122	Duplex Receptacle; Both Outlets Ckt 1 Duplex Receptacle; Both Outlets Ckt 2 Duplex Receptacle; Both Outlets Ckt 3 Duplex Receptacle; Both Outlets Ckt 4 Quad Receptacle; Four Outlets Ckt 1 Quad Receptacle; Four Outlets Ckt 2 Quad Receptacle; Four Outlets Ckt 3 Quad Receptacle; Four Outlets Ckt 4 Quad Receptacle; Two Outlets Ckt 4 Quad Receptacle; Two Outlets Ckt 1, Two Outlets Ckt 2 Quad Receptacle; Two Outlets Ckt 3, Two Outlets Ckt 4	.\$112.00 .\$112.00 .\$112.00 .\$179.44 .\$179.44 .\$179.44 .\$179.44
PM-JUMP-030 PM-JUMP-036 PM-JUMP-042 PM-JUMP-054 PM-JUMP-060 PM-JUMP-066 PM-JUMP-072 PM-JUMP-084	. Modular Jumper Cable for 24" On-Center Devices Modular Jumper Cable for 30" On-Center Devices Modular Jumper Cable for 36" On-Center Devices Modular Jumper Cable for 42" On-Center Devices Modular Jumper Cable for 48" On-Center Devices Modular Jumper Cable for 54" On-Center Devices Modular Jumper Cable for 60" On-Center Devices Modular Jumper Cable for 66" On-Center Devices Modular Jumper Cable for 72" On-Center Devices Modular Jumper Cable for 84" On-Center Devices Modular Jumper Cable for 96" On-Center Devices Modular Jumper Cable for 96" On-Center Devices	.\$70.39 .\$75.26 .\$80.13 .\$85.00 .\$89.88 .\$94.76 .\$99.62 .\$104.49 .\$114.24

TELECOM-SINGLE DUPLEX


STANDARD TELECOM KIT


The single duplex device incorporates a four-unit modular telecom opening. Each device comes with two angled TC-UM03-BK modules from Hubbell that accomodate up to four keystone-sized connectors. These modules also accomodate keystone-sized connectors from a variety of other manufacturers.


INCLUDED MODULES:

- (2) TC-UM03-BK 1.5 unit 2-port angled modules
 (1) TC-BM01-BK .5 unit blank module
- (4) TC-BM02-BK 1.0 unit blank module

These modules are included with each single duplex







OPTIONAL AUDIO/VISUAL KIT

INCLUDES:

- (2) TC-KS01-BK Cat6 data jacks
 (1) TC-KS08-BK HDMI keystone pass-thru
- (1) TC-OC03-BK VGA gender changer

 Includes TC-UM02-BK unloaded module

 Includes 18" slimline VGA patch cable

 (1) TC-K\$10-BK 3.5mm audio screw termination jack

PN: TKIT-AV1 | \$162.18

OPTIONAL VOICE/DATA KIT

INCLUDES:

• (4) TC-KS01-BK Cat6 voice/data jacks

PN: TKIT-VD1 | \$49.86

NOTE: Both optional telecom kits utilize the (2) TC-UM03-BK modules included with each receptacle cover

UNLOADED MODULES

PART NUMBER	DESCRIPTION	PRICE
TC-UM01-BK	1.5 Unit Angled For VGA (TC-OC03)	\$11.55
TC-UM03-BK	1.5 Unit Angled For (2) Keystone Connectors	\$5.09
	1.0 Unit Flat For (1) Keystone	
KEYSTONE CONN	IECTORS	
PART NUMBER	DESCRIPTION	PRICE
TC-KS01-BK	CAT 6 Snap Fit Jack	\$12.51
TC-KS06-BL	USB Snap Fit Pass-Thru F/F Coupler, USB 2.0 A to A	\$67.52
TC-KS08-BK	HDMI Snap Fit Pass-Thru F/F Coupler	\$61.03
TC-KS09-BK	F-Connector Snap Fit Pass-Thru F/F Coupler	\$19.88
	3.5MM Audio Snap Fit, Screw Termination	
OTHER CONNECT	ORS	
PART NUMBER	DESCRIPTION	PRICE
TC-OC03	VGA Gender Changer, 15-PIN F/F	\$30.02

TELECOM-MODULAR POWER


STANDARD TELECOM KIT


Modular receptacle devices (duplex and quad) each incorporate 2 three-unit modular telecom openings. Each device comes with two TC-UM04-BK modules from Hubbell that accomodate up to four keystone-sized connectors. These modules also accomodate keystone-sized connectors from a variety of other manufacturers.

INCLUDED MODULES:

- (2) TC-UM03-BK 1.5 unit 2-port angled modules
 (5) TC-BM02-BK 1.0 unit blank module
 (6) TC-BM01-BK .5 unit blank module

These modules are included with each duplex and quad modular receptacle

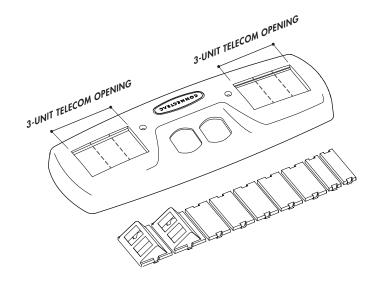



OPTIONAL VOICE/DATA KIT

INCLUDES:

• (4) TC-KS01-BK Cat6 voice/data jacks

PN: TKIT-VD1 | \$49.86

NOTE: The optional telecom kit utilizes the (2) TC-UM03-BK modules included with each receptacle cover

UNLOADED MODULES


PART NUMBER	DESCRIPTION	PRICE
TC-UM01-BK	1.5 Unit Angled For VGA	\$11.55
TC-UM03-BK	1.5 Unit Angled For (2) Keystone Connectors	\$5.09
TC-UM04-BK	1.0 Unit Flat For (2) Keystone Connectors	\$4.66
TC-UM05-BK	1.0 Unit Flat For (1) Keystone Connector	\$4.66
KEYSTONE CONN	NECTORS	
PART NUMBER	DESCRIPTION	PRICE
TC-KS01-BK	CAT 6 Snap Fit Jack	\$12.51
	USB Snap Fit Pass-Thru F/F Coupler, USB 2.0 A to A	
TC-KS08-BK	HDMI Snap Fit Pass-Thru F/F Coupler	\$61.03
	F-Connector Snap Fit Pass-Thru F/F Coupler	
TC-K\$10-BK	3.5MM Audio Snap Fit, Screw Termination	\$45.77
OTHER CONNECT	ORS	
PART NUMBER	DESCRIPTION	PRICE

TC-OC03......VGA Gender Changer, 15-PIN F/F......\$30.02

WIRING DIAGRAMS


SINGLE DUPLEX RECEPTACLE SYSTEMS

PS-I-XXX, PS-A-IN-XXX



MODULAR RECEPTACLE SYSTEMS

PM-RECM-DP-X, PM-RECM-QD-XXXX




4-CIRCUIT CONNECTION MONUMENT

PS-M-XXX

3+1 WIRING OPTION:


NEUTRAL 2 GRAY 12 GAUGE NEUTRAL 1 WHITE 10 GAUGE ISO GROUND GRN-YEL 12 GAUGE GROUND GREEN 12 GAUGE HOT 4 PINK 12 GAUGE 12 GAUGE BLUE HOT 3 HOT 2 RFD 12 GAUGE HOT 1 12 GAUGE BLACK

2+2 WIRING OPTION:

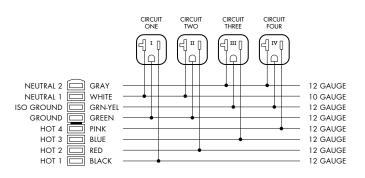

NOTE: The 4-circuit connection monument can utilize either of the above wiring schemes

CABLE FILL CAPACITY



INSIDE DIMENSIONS: 3.1" x .6"

OUTSIDE DIMENSIONS: $3.7" \times .62"$ with flooring

SHIELDING for low voltage cabling is provided by Connectrac's special galvanized steel flex conduit.

STANDARD CABLE FILL CAPACITIES:	Cat 6	
Using Single Power device (ref. page 5)	18	
Using Modular Power device (ref. page 6)	6	

NOTE: Typical Cat6 cables are used as a benchmark for communications cable capacity within the wireway. The actual number of cables that can be accommodated will vary based on the dimensions of the cabling, which varies by manufacturer.

CONNECTRAC LIMITED WARRANTY

Strong Products Group, Ltd. d/b/a Connectrac ("Connectrac") hereby warrants, to the original purchaser or owner (collectively, "Buyer"), that any product manufactured and sold by Connectrac will be substantially free from unreasonable and significant defects in material, construction, and workmanship under normal use, service, and only for their original purpose, for a period of five (5) years from the date of original installation or six (6) years from the date of purchase, whichever is sooner. Standard commercial tolerances apply. This Limited Warranty ("Statement") applies only to products, which have been <u>installed properly in accordance</u> with Installation Instructions supplied by Connectrac and any applicable codes and standards.

This Statement is void if any Connectrac products have been modified, repaired, altered, tampered, mixed with, or intermixed (used within a system) with products or materials in a manner not approved by Connectrac. This Statement does not cover Connectrac products subjected to accidents, improper use, improper maintenance, improper cleaning, negligence, misuse, or abuse. This Statement is void if damage results from the use of detergents, cleaners, abrasives, or other harsh chemical agents not authorized or sanctioned by Connectrac. Connectrac is in no way liable or responsible for any damage to Connectrac products that would void this Statement.

When you contact Connectrac, please provide reasonable proof of the date of your purchase of the Connectrac product at issue. It may be necessary for Connectrac to arrange an inspection of your product to determine whether or not a defect exists. Connectrac's sole obligation (and the sole exclusive remedy of the Buyer) with respect to any products that are proven to be defective, will, at the sole discretion of Connectrac, be the repair or replacement of the defective products or refund of the purchase price of the defective products. Returned products will not be accepted unless Connectrac is notified and authorizes the return, in writing, prior to shipment.

Certain products of Connectrac may have a specific limited warranty or limitation of liability included that differs from this Statement.

The terms of any such specific limited warranty or limitation of liability supersede those set forth in this Statement.

Connectrac's products are listed by Underwriters Laboratories, Inc. and the Canadian Standards Association. Buyer agrees to exercise reasonable care in the installation and use of Connectrac products. Buyer acknowledges that Connectrac products may be dangerous and agrees to release Connectrac from any liability for injury or damage in connection therewith. Buyer further agrees to defend, indemnify, and hold harmless Connectrac from and against any and all third-party claims and liabilities (including, without limitation, reasonable attorneys' fees and costs), regardless of the form of action, arising out of or in connection with the installation and use of Connectrac products, provided that Buyer is notified promptly in writing of the action, Connectrac has not reached any compromise or settlement of such action or made any admissions in respect of the same, and Buyer is given the option, at its expense, to control the action and all requested reasonable assistance, including indemnification from any third party, to defend the same.

