ROOFING SELECTION GUIDE

Luxury & Designer Roofing Shingles







You know it when you see it.

It's not just a roof.
It's a CertainTeed roof.

Quality. Durability. Style. Color.

When you select a roof for your home, there's a lot to consider.

That's when a roof becomes more than just a roof. The same way a home is more than just a house.

You want the best for your home and everything in it.

So why guess, when you can be Certain?





ARCADIA SHAKE®

- Four-layer laminate construction mimics the look of cedar shakes
- Four cutouts on the top of each shingle add dimensionality
- Variegated edges enhance the authentic wood shake appearance
- 450 lbs. per square
- Lifetime limited transferable warranty residential*
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- Select colors can be used to comply with the 2016 California Title 24 Part 6 Cool Roof Requirements

* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- ASTM E108 Class A
- ASTM D3018 Type 1

Wind Resistance:

- ASTM D3161 Class F
- ASTM D7158 Class H

Tear Resistance:

- ASTM D3462
- CSA standard A123.5

Impact Resistance:

• UL2218 Class 3

Solaris Weathered Wood:

• Calculated SR: 0.22


Solaris Cypresswood:

• Calculated SR: 0.21

COLOR AVAILABILITY























PRESIDENTIAL SHAKE® TL

- Three-piece laminated fiberglass construction
- Distinctive sculpted, rustic look
- 475 lbs. per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty (where available)
- 10-year SureStart[™] protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- Presidential Starter (required) and hip and ridge accessory available (see details in back of brochure)
- Select colors can be used to comply with the 2016 California Title 24 Part 6 Cool Roof Requirements
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018
 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class A

Tear Resistance:


- UL certified to meet ASTM D3462
- CSA standard A123.5

Wind Driven Rain Resistance:

 Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

• ICC-ES-ESR-1389 & ESR-3537

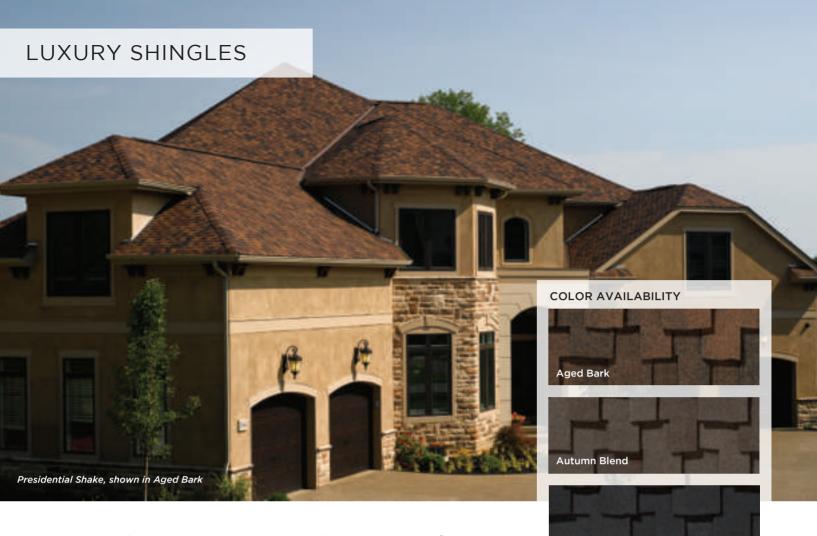

PRESIDENTIAL SHAKE®

- Two-piece laminated fiberglass construction
- Distinctive sculpted, rustic look
- 355 lbs. per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty
 group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty (where available)
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- Presidential Starter (required) and hip and ridge accessory available (see details in back of brochure)
- Select colors can be used to comply with the 2016 California Title 24 Part 6 Cool Roof Requirements
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Wind Driven Rain Resistance:

 Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.


Quality Standards:

• ICC-ES-ESR-1389 & ESR-3537



Charcoal Black













GRAND MANOR®

- Two full-size, fiberglass-based shingles with randomly applied tabs
- Authentic depth and dimension of natural slate
- Virtual five-layer coverage when applied
- 425 lbs. per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty - group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- High-Performance Starter and hip and ridge accessory available (see details in back of brochure)
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Wind Driven Rain Resistance:

 Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

• ICC-ES-ESR-1389 & ESR-3537



CARRIAGE HOUSE®

- Two full-size, fiberglass-based shingles
- · Unique chamfered cut for scalloped appearance
- Four-layer coverage when applied
- 350 lbs. per square
- Lifetime limited transferable warranty - residential*
- 50-year limited transferable warranty - group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- Hip and ridge accessory available (see details in back of brochure)
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Wind Driven Rain Resistance:

• Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

• ICC-ES-ESR-1389 & ESR-3537

GRAND MANOR and CARRIAGE HOUSE SHINGLES

These two shingles can be combined to create a myriad of custom patterns, emulating traditional slate roof designs.













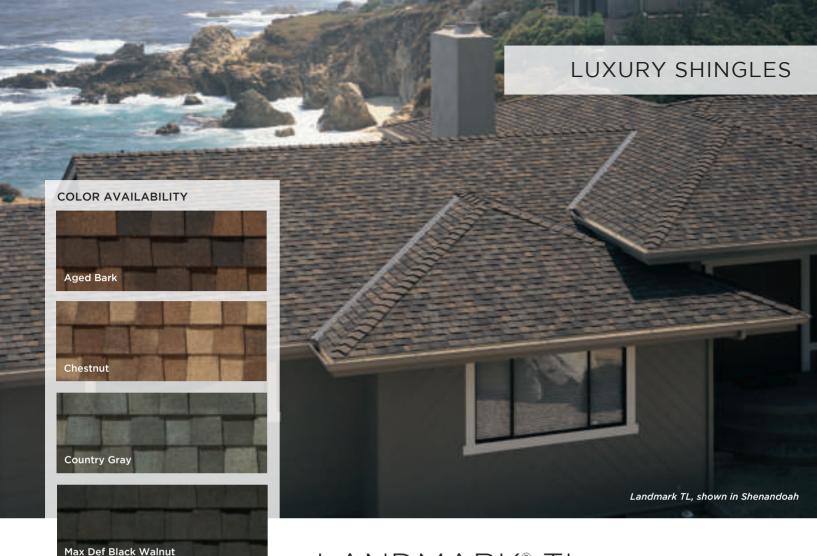












LANDMARK® TL

- Three-piece laminated fiberglass construction
- Rustic appearance of hand-split wood shakes
- 305 lbs. per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty (where available)
- 10-year SureStart[™] protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- CertainTeed Starter and hip and ridge accessory available (see details in back of brochure)
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Wind Driven Rain Resistance:

 Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

• ICC-ES-ESR-1389 & ESR-3537



LANDMARK® PREMIUM

- Two-piece laminated fiberglass-based construction
- Classic shades and dimensional appearance of natural wood or slate
- 300 lbs. per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty - group-owned or commercial*
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- CertainTeed Starter and hip and ridge accessory available (see details in back of brochure)
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Quality Standards:

• ICC-ES-ESR-1389 & ESR-3537

COLOR AVAILABILITY












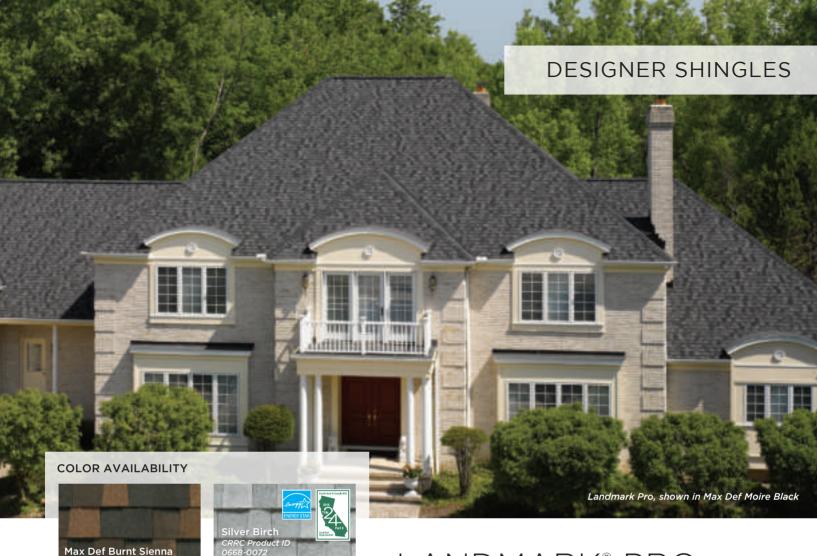





CRRC Product ID 0668-0123













LANDMARK® PRO

- Two-piece laminated fiberglass-based construction
- Classic shades and dimensional appearance of natural wood or slate
- 270 lbs. per square
- Lifetime limited transferable warranty - residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 10-year SureStart™ protection
- 15-year 110 mph windresistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- CertainTeed Starter and hip and ridge accessory available (see details in back of brochure)
- Select colors can be used to comply with the 2016 California Title 24 Part 6 Cool Roof Requirements
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F


Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Quality Standards:

• ICC-ES-ESR-1389 & ESR-3537



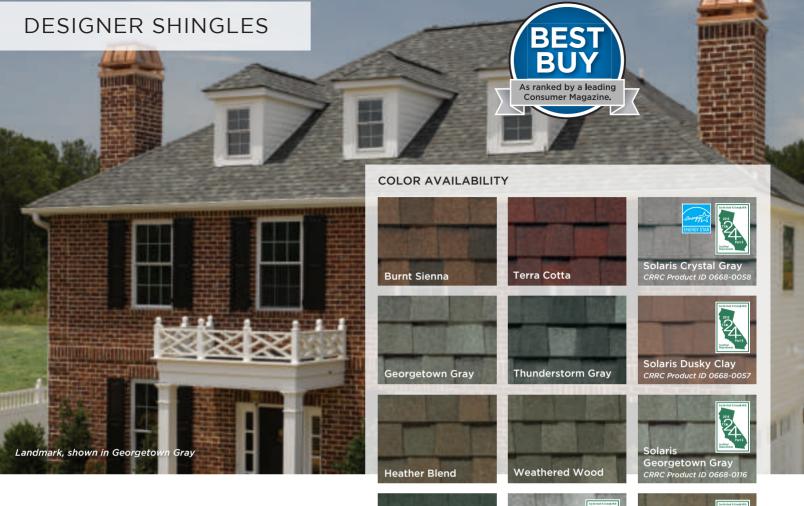

LANDMARK®

- Two-piece laminated fiberglass-based construction
- Classic shades and dimensional appearance of natural wood or slate
- 229 lbs. per square
- · Lifetime limited transferable warranty*
- 10-year SureStart™ protection
- 15-year 110 mph windresistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- CertainTeed Starter and hip and ridge accessory available (see details in back of brochure)
- · Select colors can be used to comply with the 2016 California Title 24 Part 6 Cool Roof Requirements
- * See warranty for specific details

and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- · UL certified to meet **ASTM D3462**
- CSA standard A123.5

Quality Standards:

• ICC-ES-ESR-1389 & ESR-3537

























CRRC Product ID 0668-0117









LANDMARK SOLARIS® PLATINUM

Solar Reflective Shingles

- Two-piece laminated fiberglass-based construction
- Classic shades and dimensional appearance of natural wood or slate
- 250 lbs. per square
- Meets ENERGY STAR requirements
- Lifetime limited transferable warranty - residential*
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- Colors shown can be used to comply with the 2016 California Title 24 Part 6 Cool Roof Requirements

and limitations.

* See warranty for specific details

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Quality Standards:

• ICC-ES-ESR-1389 & ESR-3537



COLOR AVAILABILITY

Coastal Tan CRRC Product ID 0668-0079





THE COLLECTION

CertainTeed's Solar Reflective Shingles Collection puts cool roof technology to work for you.

Our advanced roofing granules reflect solar energy and radiant heat far better than traditional roofing shingles, reducing your roof's temperature in the summer.

All are rated by the Cool Roof Rating Council (CRRC) for cool roofs and can be used to comply with the 2016 California Title 24 Part 6 Cool Roof Requirements. Can Be Used To Comply With

2016
Title

Part 6

Cool Roof

Boolingsparts

Choose from three spectacular solar shingle line-ups.

GOOD: Landmark®

BETTER: Landmark Pro® and Presidential Shake®

BEST: Landmark Solaris® Platinum, with an industry leading solar reflectance value

of over 40%, Presidential Shake® TL

and Arcadia Shake

Solar Reflectivity (SR), Thermal Emittance (TE) & Solar Reflectance Index (SRI) Data

			CRRC Rated Product Directory								tar
Product	Color	Tier	Product ID	Solar Reflectance		Thermal Emittance		Solar Reflective Index		CA 2016 Title 24*	Energy Star
				Initial	Aged	Initial	Aged	Initial	Aged	δĔ	<u>ٿ</u> ڙ
Landmark"	Birchwood	Good	0668-0084	0.21	pending	0.92	pending	21	pending	YES	N
Landmark"	Mist White	Good	0668-0071	0.26	0.28	0.92	0.90	28	29	YES	Y
Landmark"	Mojave Tan	Good	0668-0115	0.19	pending	0.88	pending	17	pending	YES	N
Landmark"	Silver Birch	Good	0668-0072	0.26	0.27	0.90	0.89	27	28	YES	Υ
Landmark"	Solaris Aged Cedar	Good	0668-0055	0.26	0.24	0.92	0.90	28	24	YES	Ν
Landmark"	Solaris Crystal Gray	Good	0668-0058	0.27	0.26	0.92	0.90	29	27	YES	Y
Landmark"	Solaris Dusky Clay	Good	0668-0057	0.26	0.23	0.93	0.90	28	23	YES	N
Landmark"	Solaris Georgetown Gray	Good	0668-0116	0.20	pending	0.91	pending	19	pending	YES	Ν
Landmark"	Solaris Heather Blend	Good	0668-0117	0.20	pending	0.91	pending	19	pending	YES	Ν
Landmark"	Solaris Moire Black	Good	0668-0129	0.19	pending	0.91	pending	18	pending	YES	Ν
Landmark"	Solaris Resawn Shake	Good	0668-0118	0.19	pending	0.92	pending	19	pending	YES	Ν
Landmark"	Solaris Weathered Wood	Good	0668-0119	0.20	pending	0.91	pending	19	pending	YES	Ν
Landmark PRO'	Silver Birch	Better	0668-0072	0.26	0.27	0.90	0.89	27	28	YES	Υ
Landmark PRO	Solaris Max Def Georgetown Gray	Better	0668-0122	0.20	pending	0.94	pending	21	pending	YES	Ν
Landmark PRO'	Solaris Max Def Heather Blend	Better	0668-0123	0.19	pending	0.93	pending	19	pending	YES	Ν
Landmark PRO"	Solaris Max Def Moire Black	Better	0668-0130	0.19	pending	0.91	pending	18	pending	YES	Ν
Landmark PRO'	Solaris Max Def Resawn Shake	Better	0668-0124	0.19	pending	0.93	pending	19	pending	YES	Ν
Landmark PRO'	Solaris Max Def Weathered Wood	Better	0668-0125	0.21	pending	0.94	pending	22	pending	YES	Ν
Presidential Shake"	Solaris Autumn Blend	Better	0668-0127	0.21	pending	0.92	pending	21	pending	YES	Ν
Presidential Shake"	Solaris Country Gray	Better	0668-0128	0.21	pending	0.92	pending	21	pending	YES	Ν
Landmark Solaris" Platinum	Coastal Tan	Best	0668-0079	0.40	0.36	0.91	0.90	45	40	YES	Υ
Landmark Solaris" Platinum	Santa Fe	Best	0668-0080	0.40	0.35	0.90	0.91	45	39	YES	Υ
Landmark Solaris" Platinum	Sierra Buff	Best	0668-0078	0.41	0.37	0.92	0.90	47	41	YES	Υ
Presidential Shake" TL	Solaris Autumn Blend	Best	0668-0127	0.21	pending	0.92	pending	21	pending	YES	N
Presidential Shake" TL	Solaris Country Gray	Best	0668-0128	0.21	pending	0.92	pending	21	pending	YES	١
Arcadia Shake	Solaris Cypresswood	Best	0668-0120	0.19	pending	093	pending	19	pending	YES	١
Arcadia Shake	Solaris Weathered Wood	Best	0668-0121	0.21	pending	0.93	pending	22	pending	YES	١

^{*} Can be used to comply with the 2016 California Title 24 Part 6 Cool Roof Requirements.

Good

LANDMARK®

























Better

LANDMARK® PRO





Solaris Max Def Georgetown Gray
CRRC Product ID 0668-0122









PRESIDENTIAL SHAKE®





Best

LANDMARK SOLARIS® PLATINUM







PRESIDENTIAL SHAKE® TL





ARCADIA SHAKE®







HIGHLAND SLATE®

- Single layer fiberglass-based construction
- Blended shades and dimensional appearance of natural slate
- 8" exposure, 18" x 36" size, 240 lbs per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- * See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Certified to meet ASTM D3018 Type 1
- UL 790 Class A
- ASTM E 108 Class A

Wind Resistance:

- UL 2390/ASTM D 6381 Class H
- ASTM D3161 Class F

Tear Resistance:

- UL Certified to meet ASTM D3462
- CSA Standard A123.5

Wind Driven Rain Resistance:

 Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

• ICC-ES-ESR-1389 & ESR-3537











HIP AND RIDGE ACCESSORIES



Shangle® Ridge Accessory

- Hip and ridge capping
- · Two full layers
- 12" width allows application over standard ridge vents
- · Full 8" exposure
- Matches all Grand Manor, Highland Slate and Carriage House colors
- · Algae resistant



Shadow Ridge®

- Used for hip and ridge capping
- Single-layer coverage for product versatility
- · Sealant strip for maximum adherence
- Dimensions are 13 1/4" x 39 3/8", with a 5 5/8" exposure
- Can be used on shingle-over vents or directly over centerline of hip or ridge
- Available in complementary product colors (see individual Roofing Plant Catalogs for color availability)



Mountain Ridge®

- Fiberglass reinforced SBS modified bitumen
- · Five layer design with tri-laminate base
- · Available in 8" and 10" widths
- 8" exposure
- · Also available in Solaris colors



Solaris® Hip and Ridge

- Used for hip and ridge capping
- Matches Landmark Solaris shingle colors
- Covers 45 lineal feetper bundle;
 24 shingles per bundle



Cedar Crest®

- Dimensions are (overall) 12" x 36", separated into individual pieces 12" x 12", with an 8" exposure
- · Covers 20 lineal feet per bundle
- Matches all Highland Slate colors



Integrity Roof System™

Integrity is built from the bottom up. Layer-on-layer, only CertainTeed provides the peace of mind that comes with the best components performing together for peak efficiency.

1. Waterproof Underlayment

Waterproofing shingle underlayment prevents leaks from wind-driven rain and ice dams

2. Water-Resistant Underlayment

High-performance underlayment provides a water-resistant layer over the roof deck and a secondary barrier against leaks

3. Starter Shingles

Perfect starts every time and designed to work in tandem with the roof shingles above

4. Roof Shingles

Choose the best, covered by the strongest warranty in the business

5. Hip & Ridge Caps

Perfect finish for hip and ridge lines, complementing all CertainTeed shingles

6. Roof Ventilation

Engineered for ideal roof ventilation especially when matched with CertainTeed Intake Vents

SELECTION GUIDE

LUXURY SHIN	NGLES	Shingle Construction and Description	Weight (lbs. per square)	UL Class A Fire Resistance Rating	UL Certified to Meet ASTM D3462	UL Certified to Meet ASTM D3018 Type 1	ASTM D3161 Wind Resistance	Conforms To CSA Standard A123.5	ICC-ES ESR-1389 & ESR-3537
Arcadia		Four-layer laminate construction mimics the look of cedar shakes; Four cutouts on the top of each shingle add dimensionality; Variegated edges enhance the authentic wood shake appearance	450	V	V	V	Class F, 110 mph	V	(1389 only)
Presidential Shake TL	went)	Three-piece laminated fiberglass construction; Distinctive sculpted, rustic look 475				V	Class A	V	~
Presidential Shake	went!	Two-piece laminated fiberglass-based construction; Distinctive sculpted, rustic look	355	~	V	V	Class F, 110 mph	~	~
Grand Manor	-11	Two full-size, fiberglass-based shingles with randomly applied tabs; Authentic depth and dimension of natural slate; Virtual five-layer coverage when applied	425	~	>	>	Class F, 110 mph	>	~
Carriage House	ست	Two full-size, fiberglass-based shingles; Unique chamfered cut for scalloped appearance; Four-layer coverage when applied	350	~	V	٧	Class F, 110 mph	>	~
Landmark TL		Three-piece laminated fiberglass construction; Rustic appearance of hand-split wood shakes	305	~	~	>	Class F, 110 mph	>	~
DESIGNER SH	HINGLES								
Landmark Premium	0000	Two-piece laminated fiberglass-based construction; Classic shades and dimensional appearance of natural wood or slate	300	~	~	>	Class F, 110 mph	~	~
Landmark Pro	0700	Two-piece laminated fiberglass-based construction; Classic shades and dimensional appearance of natural wood or slate	270	~	~	~	Class F, 110 mph	~	~
Landmark		Two-piece laminated fiberglass-based construction; Classic shades and dimensional appearance of natural wood or slate	229	~	V	V	Class F, 110 mph	V	~
Landmark Solaris Platinum	0000	Two-piece laminated fiberglass-based construction; Classic shades and dimensional appearance of natural wood or slate	250	~	~	>	Class F, 110 mph	>	~
Highland Slate		Single layer fiberglass-based construction; Blended shades and dimensional appearance of natural slate	240	~	~	V	Class F, 110 mph	V	~

Limited Transferable Warranty Against Manufacturing Defects On Residential Applications *50-Year on Group-owned or Commercial Applications	StreakFighter® algaeresistance Warranty	SureStart Protection	Wind-Resistance Warranty Upgraded wind warranty available. See warranty for details and limitations	Shingle Size	Bundles Per Square
Lifetime*		10-year	15-year 110 mph **	37 1/2" x 19 1/2" 8" Exposure	6
Lifetime*	15-year (where available)	10-year	15-year 110 mph **	14 1/4" x 40" 4" Exposure	6
Lifetime*	15-year (where available)	10-year	15-year 110 mph **	14 1/4" x 40" 4" Exposure	5
Lifetime*	15-year	10-year	15-year 110 mph **	18" x 36" 8" Exposure	5
Lifetime*	15-year	10-year	15-year 110 mph **	18" x 36" 8" Exposure	5
Lifetime*	15-year (where available)	10-year	15-year 110 mph **	13 1/4" x 40" 5 5/8" Exposure	4
Lifetime*		10-year	15-year 110 mph **	13 1/4" x 38 3/4" 5 5/8" Exposure	4
Lifetime*		10-year	15-year 110 mph **	13 1/4" x 38 3/4" 5 5/8" Exposure	4
Lifetime		10-year	15-year 110 mph **	13 1/4" x 38 3/4" 5 5/8" Exposure	3
Lifetime		10-year	15-year 110 mph **	13 1/4" x 38 3/4" 5 5/8" Exposure	3
Lifetime*	15-year	10-year	15-year 110 mph **	18" x 36" 8" Exposure	3

^{**} Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required. *** With approved underlayment

High-Performance Starter

Starter Course shingle specifically for use with Grand Manor and Highland Slate—and the only approved installation alternative to using the shingles themselves.

- 10" x 36", 102 lineal ft. per bundle, 34 shingles per bundle
- Provides labor and cost savings by not cutting shingles
- Dual sealant strip for increased wind resistance
- Better look with straight factory-cut eave edge

Presidential Starter

Required for Presidential Shake TL and Presidential Shake applications.

- 13 1/4" x 40" (required double layer), 36.5 lineal ft. per bundle (based on 2-layer application), 22 shingles per bundle.
- Two layers of straight factory-cut eave edge
- Available in the entire Presidential Shake TL and Presidential Shake color line
- Assures Class A fire rating
- · Saves significant installation time

CertainTeed Swiftstart®

CertainTeed Swiftstart metric starter shingle is designed specifically for use with CertainTeed Landmark Series shingles. Rather than cutting expensive field shingles to use as starters, you can save time and money by starting with Swiftstart.

- Code-compliant, meets min. 2" headlap requirement for metric shingles; many competing products do not
- Each 18-piece bundle covers 116 lineal ft.
- Recommended for use to obtain enhanced warranties

Shangle® Ridge Accessory

 Hip and ridge for Grand Manor, Carriage House and Highland Slate; 10 lineal ft. per bundle; 15 shingles per bundle

Shadow Ridge®

Hip and ridge for Landmark TL and Landmark Series;
 45 lineal ft. per bundle; 24 shingles per bundle

Mountain Ridge®

 Hip and ridge for Arcadia, Presidential TL, Presidential Shake, Presidential Solaris, Landmark TL, Landmark Series, Landmark Solaris, Presidential TL Solaris and Presidential Solaris

Solaris® Hip and Ridge

- Used for hip and ridge capping
- Matches Landmark Solaris shingle colors
- Covers 45 lineal feet per bundle; 24 shingles per bundle

Cedar Crest®

• Hip and ridge for Highland Slate; 20 lineal ft. per bundle

Ventilation

- CertainTeed Ridge Vent 9" filtered Class A
- CertainTeed Ridge Vent 9" filtered
- CertainTeed Ridge Vent 7" filtered Class A
- CertainTeed Ridge Vent 12" filtered
- CertainTeed Intake Vent filtered
- CertainTeed Rolled Ridge Vent filtered

StreakFighter® algae-resistance protection

StreakFighter is a special feature that protects a wide range of CertainTeed shingles from the streaking, spotting and discoloration caused by airborne algae. It helps safeguard a roof's beauty, especially in humid areas.

SureStart™ protection

Because CertainTeed roofing products are manufactured to the highest quality standards, we confidently include the additional assurance of SureStart™ protection with all CertainTeed shingles. SureStart provides the strongest protection you can get in the vital early years after your new roof has been installed.

Simply put, if a manufacturing defect is discovered during the SureStart period,
CertainTeed will provide reimbursement of 100% of the cost of the shingles and labor



to repair the defective shingles or apply new shingles to replace the defective shingles. See actual warranty for details and limitations.

Roofers' Select®

This revolutionary high-performance underlayment combines new technology with the best attributes of true 15 and 30 lb. felt.

- · Lays flat and is extremely resistant to wrinkling
- Reduces the likelihood of slipping for increased safety
- Doesn't tear away from fasteners when walked on or in strong wind



 Meets underlayment requirements for the CertainTeed Integrity Roof System™

Diamond Deck®

DiamondDeck is a synthetic, scrim-reinforced, water-resistant underlayment that can be used beneath shingle, shake, metal, or slate roofing. It is manufactured to provide best-in-class performance in terms of both weather protection and contractor safety. 10-square roll (4-foot wide and 250-foot long) is easier to handle and faster to apply than standard felt rolls.

DiamendDeck®

WinterGuard®





When snow and ice melt, trapped water can infiltrate to damage the roof deck and building interior.

WinterGuard is installed under shingled roofing to prevent water damage from ice dams, as well as wind-driven rain.

WinterGuard Sand and WinterGuard Granular are designed for use on roof decks as a waterproofing underlayment beneath shingle, slate and tile roofs to prevent leakage due to water backup from ice dams or wind-driven rain. WinterGuard HT, an advanced waterproofing underlayment, is specially formulated to resist high roof temperatures and is the only WinterGuard product to be warranted for use under metal roofs. WinterGuard is most commonly used in critical areas such as roof eaves, valleys and low-slope applications.

WinterGuard is classified by Underwriters Laboratories (UL) to be a suitable underlayment for use in any UL Class A, B or C fire rated shingle system, and it is manufactured to meet ASTM D1970. For specific details and limitations, refer to the actual product warranties.

RoofRunner™


Lightweight synthetic polymer-based underlayment outperforms felt and outclasses other synthetics. Designed for use on roof decks as a water-resistant layer beneath asphalt roofing shingles, this scrim-reinforced underlayment includes a special top surface treatment that provides excellent slip resistance, even when wet. Large roll size - 4ft wide x 250 ft long - speeds application.

MetaLayment®

MetaLayment self-adhering underlayment has a tough, tear-resistant film on its top surface that will not scratch roofing metal applied over it. The adhesive bottom surface of MetaLayment is protected with a disposable silicone-coated release film, which is split longitudinally down the middle for easier application. Manufactured to meet ASTM D1970.



With CertainTeed Flintlastic® SA, you can coordinate flat roof areas like carports, canopies and porches with your main roof. Flintlastic SA is a self-adhering low slope roofing product available in eight colors that complement some of the most popular CertainTeed shingles.

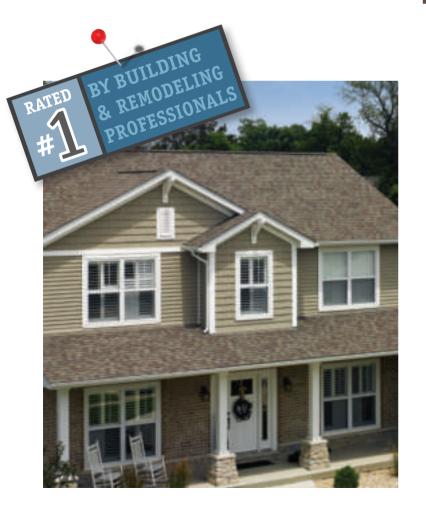


What's behind our #1 rating?

Builders and remodelers across America know certain things to be true of CertainTeed. For starters, we've been in the roofing business for over 100 years. We have thousands of satisfied homeowners. The process of building that satisfaction begins the moment you turn to us.

CertainTeed offers you the broadest range of color and style choices. But you'll see it's not style over substance. You'll get a roof that's made from the highest quality materials and backed by a strong warranty program. It's our promise to you: quality made certain, satisfaction guaranteed.


PRESIDIO®

Metal Roofing

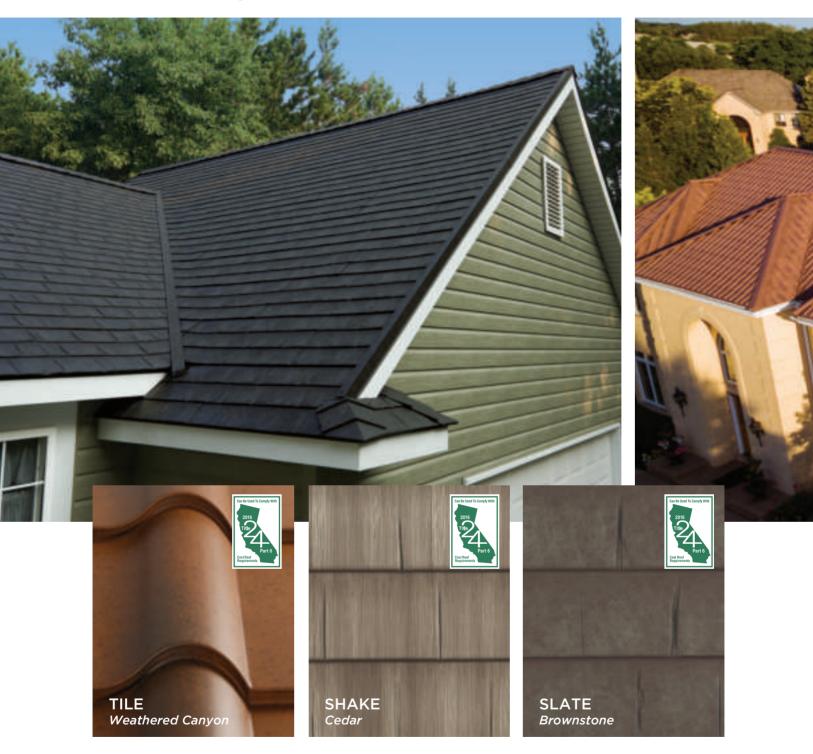



All are rated by the Cool Roof Rating Council (CRRC) for cool roofs and can be used to comply with the 2016 California Title 24 Part 6 Cool Roof Requirements.

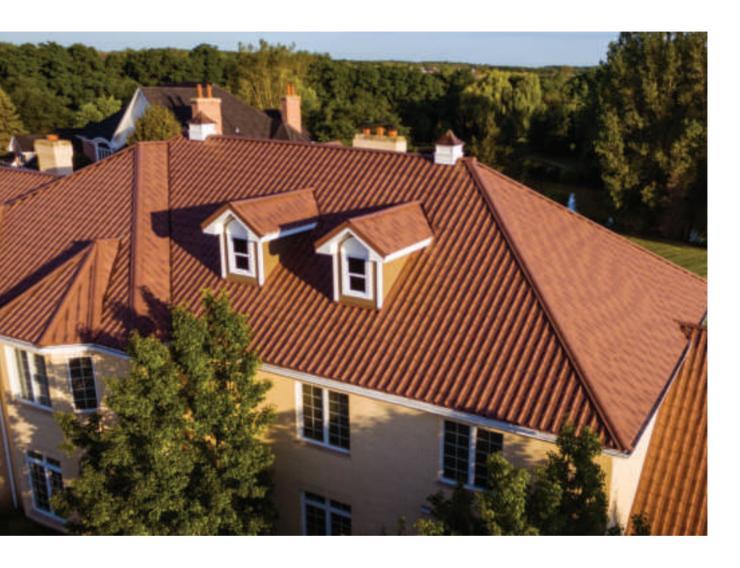

Because it's more than just a roof

Presidio Metal Roofing takes the form of slate, tile or wood shake to create a beautiful roof that makes a lasting impression.

Replicate the charm of artisanal roofing at a fraction of the cost with durable, lightweight steel.

Includes a lifetime limited warranty. Laboratory tested to resist fire, wind and hail.

Features a proprietary multi-coat paint system that offers 17 hyper-realistic color options across all profiles, including 14 CRRC-rated cool roofing colors.



RESIDENTIAL ROOFING



learn more at: certainteed.com/roofing



CertainTeed Corporation

ROOFING • SIDING • TRIM • DECKING • RAILING • FENCE • GYPSUM • CEILINGS • INSULATION

20 Moores Road Malvern, PA 19355 Professional: 800-233-8990 Consumer: 800-782-8777 certainteed.com