

PRODUCT SPECIFICATIONS

Passel Collection Adjustable-Height Tables

May 2025

TECHNICAL SPECIFICATIONS

General

The table consists of a top with two adjustable height T-Leg or C-Leg bases. T-Leg columns are centered on a horizontal foot and C-Leg columns are offset two-thirds of the distance to the back of the horizontal foot. Bases are attached to a dual stringer worksurface cross bar support that spans the two bases and supports either a 1 1/4" or a 3/4" thick tabletop. The top of the worksurface adjusts in height between 22 5/16" and 48 7/16" on tables with 3/4" thick worksurfaces and 22 11/16" and 48 13/16" on tables with 1 1/4" thick worksurfaces by means of electric two button control switch with up and down arrow indicators.

Base

The T-Leg or C-Leg base consists of a column assembly and foot, both finished with powder-coat paint. Column assembly consists of an outer member, an intermediate member, and an inner member. The lower outer member is 3 1/4" x 2" rectangular, 16-gauge steel tubing with a 1/4" thick steel plate welded inside the bottom end. The intermediate member is 3" x 1 3/4" rectangular, 16-gauge steel tubing. The top inner member is 2 3/4" x 1 1/2" rectangular, 16-gauge steel tubing with a 7 1/2" x 3 3/4" rectangular 11-gauge formed steel motor housing welded to the top end. The foot consists of two formed and welded 12-gauge steel components and is attached to the column with four 6 mm bolts. Two 1 3/4" diameter nylon base leveling glides with 3/8" of adjustability are threaded into each end of the foot.

Worksurface Support

The worksurface support is constructed using two formed 2.5 mm steel brackets that surround the motor housing at the top of each leg column. The bracket is secured to the housing using four 6 mm bolts. Four 1.5 mm J-Shaped cross members are included and can be adjusted based on worksurface width. When connected, the four channels create two full length cross members that attach to each leg bracket for stability.

Worksurfaces

Worksurfaces are available in two standard thickness, 3/4" or 1 1/4" overall thickness. Worksurfaces are constructed of 3/4" or 1 1/8" thick 45 lb density particleboard core. The top surface is covered with .030" high-pressure laminate and the bottom surface is covered with a phenolic backing. The perimeter is finished using high-impact plastic edging. The worksurface is pre-drilled and attached to the bases using twenty-four 5 mm tapping screws.

Cable Tray

The cable tray is an optional accessory which must be ordered separately. Constructed of 16-gauge sheet metal finished with a powder-coat paint which may be coordinated to match the color of the table base. Screws are provided for attachment to the underside of the worksurface, and tops are pre-drilled for cable tray attachment in predetermined locations based on worksurface size and base style. Trays provide open access from the front, user side to easily feed wires, route cables, place modules or power strips and/or install cable management systems.



TECHNICAL SPECIFICATIONS

Worksurface Screens

Screens are an optional accessory that must be ordered separately. All screens are secured to two or three 11-gauge steel formed brackets using two #10-32 knurled thumb screws per bracket. Screens are available in two styles.

Polyester Felt Screens

Polyester felt screens are constructed from 1/2" thick tackable, sound absorbing, 100% polyester felt and are available in a variety of colors. The panels have a density of 0.5 lb/ft² and are sound absorbing tested to ASTM C423 with an NRC rating of .44 when using no air gap (A Mount testing method) and an NRC rating of .81 with 2" air gap. The polyester felt is in accordance with ASTM-E84 and achieves a Class A Flame Spread.

Fabric Screens

Fabric screens are constructed from 1/2" thick tackable, low density fiberboard that is wrapped in a sewn fabric cover. The panels have a density of 21.84 lb/ft³ and are FSC Mix Credit Certified (FSC-C081621) for Sustainability. Fabric covers are available in a wide variety of KI fabrics.

Deluxe Control Pad

The Deluxe Control Pad is an optional accessory that includes three programmable memory buttons for saved height settings, an LED display that lets users read the tables overall height, and a side access USB-A port.

Passel Electric Adjustable-Height Table - Operating Capacity Charts

Tables with 1 1/4" Thick Worksurfaces			
Table Dimensions	1 1/4" Top Weight (approx.)	Base Only Operating Capacity	Operating Load Capacity
24 x 48	40 lb	250 lb	200 lb
24 x 54	45 lb	250 lb	200 lb
24 x 60	50 lb	250 lb	195 lb
24 x 66	55 lb	250 lb	190 lb
24 x 72	60 lb	250 lb	185 lb
30 x 48	50 lb	250 lb	195 lb
30 x 54	56 lb	250 lb	190 lb
30 x 60	63 lb	250 lb	180 lb
30 x 66	69 lb	250 lb	175 lb
30 x 72	75 lb	250 lb	170 lb

Tables with 3/4" Thick Worksurfaces			
Table Dimensions	3/4" Top Weight (approx.)	Base Only Operating Capacity	Operating Load Capacity
24 x 48	24 lb	250 lb	220 lb
24 x 54	27 lb	250 lb	215 lb
24 x 60	30 lb	250 lb	215 lb
24 x 66	33 lb	250 lb	210 lb
24 x 72	36 lb	250 lb	210 lb
30 x 48	30 lb	250 lb	215 lb
30 x 54	34 lb	250 lb	210 lb
30 x 60	38 lb	250 lb	215 lb
30 x 66	42 lb	250 lb	205 lb
30 x 72	45 lb	250 lb	200 lb

CODE COMPLIANCE




Furnishing Knowledge®

DIMENSIONS


Passel Adjustable-Height Table - C-Leg

Model Number	A Table Depth	B Table Width	C Table Height	D Worksurface Thickness	E Space Between Legs	F Worksurface-to-Floor	G Support Frame-to-Floor	H Worksurface Edge-to-Leg Mounting Bracket	I Leg Setback	J Leg Inset
PKFFA2448	23 ¹ / ₂ "	46 ¹ / ₂ "	22 ³ / ₁₆ " - 48 ⁵ / ₁₆ "	³ / ₄ "	37"	21 ³ / ₈ " - 47 ⁹ / ₁₆ "	19 ³ / ₈ " - 45 ⁹ / ₁₆ "	1 ⁹ / ₁₆ "	14 ³ / ₄ "	5 ⁹ / ₁₆ "
			22 ¹¹ / ₁₆ " - 48 ¹³ / ₁₆ "	1 ¹ / ₄ "						
PKFFA2454	23 ¹ / ₂ "	52 ¹ / ₂ "	22 ³ / ₁₆ " - 48 ⁵ / ₁₆ "	³ / ₄ "	43"	21 ³ / ₈ " - 47 ⁹ / ₁₆ "	19 ³ / ₈ " - 45 ⁹ / ₁₆ "	1 ⁹ / ₁₆ "	14 ³ / ₄ "	5 ⁹ / ₁₆ "
			22 ¹¹ / ₁₆ " - 48 ¹³ / ₁₆ "	1 ¹ / ₄ "						
PKFFA2460	23 ¹ / ₂ "	58 ¹ / ₂ "	22 ³ / ₁₆ " - 48 ⁵ / ₁₆ "	³ / ₄ "	49"	21 ³ / ₈ " - 47 ⁹ / ₁₆ "	19 ³ / ₈ " - 45 ⁹ / ₁₆ "	1 ⁹ / ₁₆ "	14 ³ / ₄ "	5 ⁹ / ₁₆ "
			22 ¹¹ / ₁₆ " - 48 ¹³ / ₁₆ "	1 ¹ / ₄ "						
PKFFA2466	23 ¹ / ₂ "	64 ¹ / ₂ "	22 ³ / ₁₆ " - 48 ⁵ / ₁₆ "	³ / ₄ "	55"	21 ³ / ₈ " - 47 ⁹ / ₁₆ "	19 ³ / ₈ " - 45 ⁹ / ₁₆ "	1 ⁹ / ₁₆ "	14 ³ / ₄ "	5 ⁹ / ₁₆ "
			22 ¹¹ / ₁₆ " - 48 ¹³ / ₁₆ "	1 ¹ / ₄ "						
PKFFA2472	23 ¹ / ₂ "	70 ¹ / ₂ "	22 ³ / ₁₆ " - 48 ⁵ / ₁₆ "	³ / ₄ "	58 ³ / ₄ "	21 ³ / ₈ " - 47 ⁹ / ₁₆ "	19 ³ / ₈ " - 45 ⁹ / ₁₆ "	2 ¹ / ₁₆ "	14 ³ / ₄ "	5 ⁹ / ₁₆ "
			22 ¹¹ / ₁₆ " - 48 ¹³ / ₁₆ "	1 ¹ / ₄ "						
PKFFA3048	29 ¹ / ₂ "	46 ¹ / ₂ "	22 ³ / ₁₆ " - 48 ⁵ / ₁₆ "	³ / ₄ "	37"	21 ³ / ₈ " - 47 ⁹ / ₁₆ "	19 ³ / ₈ " - 45 ⁹ / ₁₆ "	1 ⁹ / ₁₆ "	19 ¹ / ₁₆ "	7 ⁵ / ₁₆ "
			22 ¹¹ / ₁₆ " - 48 ¹³ / ₁₆ "	1 ¹ / ₄ "						
PKFFA3054	29 ¹ / ₂ "	52 ¹ / ₂ "	22 ³ / ₁₆ " - 48 ⁵ / ₁₆ "	³ / ₄ "	43"	21 ³ / ₈ " - 47 ⁹ / ₁₆ "	19 ³ / ₈ " - 45 ⁹ / ₁₆ "	1 ⁹ / ₁₆ "	19 ¹ / ₁₆ "	7 ⁵ / ₁₆ "
			22 ¹¹ / ₁₆ " - 48 ¹³ / ₁₆ "	1 ¹ / ₄ "						
PKFFA3060	29 ¹ / ₂ "	58 ¹ / ₂ "	22 ³ / ₁₆ " - 48 ⁵ / ₁₆ "	³ / ₄ "	49"	21 ³ / ₈ " - 47 ⁹ / ₁₆ "	19 ³ / ₈ " - 45 ⁹ / ₁₆ "	1 ⁹ / ₁₆ "	19 ¹ / ₁₆ "	7 ⁵ / ₁₆ "
			22 ¹¹ / ₁₆ " - 48 ¹³ / ₁₆ "	1 ¹ / ₄ "						
PKFFA3066	29 ¹ / ₂ "	64 ¹ / ₂ "	22 ³ / ₁₆ " - 48 ⁵ / ₁₆ "	³ / ₄ "	55"	21 ³ / ₈ " - 47 ⁹ / ₁₆ "	19 ³ / ₈ " - 45 ⁹ / ₁₆ "	1 ⁹ / ₁₆ "	19 ¹ / ₁₆ "	7 ⁵ / ₁₆ "
			22 ¹¹ / ₁₆ " - 48 ¹³ / ₁₆ "	1 ¹ / ₄ "						
PKFFA3072	29 ¹ / ₂ "	70 ¹ / ₂ "	22 ³ / ₁₆ " - 48 ⁵ / ₁₆ "	³ / ₄ "	58 ³ / ₄ "	21 ³ / ₈ " - 47 ⁹ / ₁₆ "	19 ³ / ₈ " - 45 ⁹ / ₁₆ "	2 ¹ / ₁₆ "	19 ¹ / ₁₆ "	7 ⁵ / ₁₆ "
			22 ¹¹ / ₁₆ " - 48 ¹³ / ₁₆ "	1 ¹ / ₄ "						


(model PKFFA2448-73P with glide base shown)

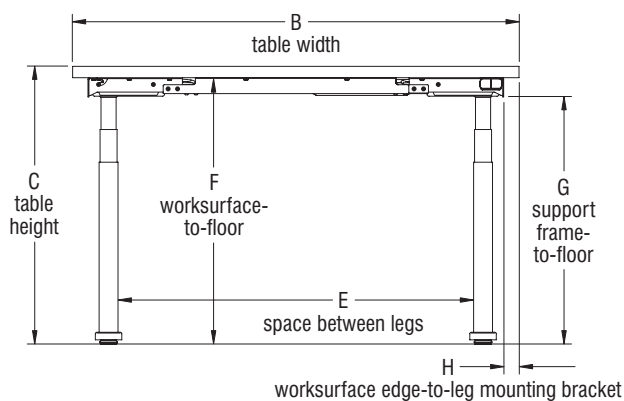

(front view)

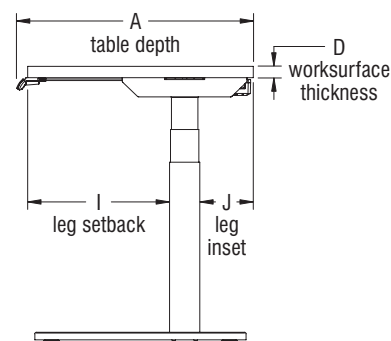

(side view)

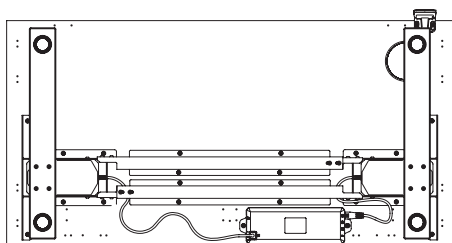

(bottom view)


Note: Table height dimensions in the chart above represent tables with glide bases. If the table has a caster base, 1" must be added to the "table height" column in the chart.

DIMENSIONS


Passel Adjustable-Height Table - T-Leg

Model Number	A Table Depth	B Table Width	C Table Height	D Worksurface Thickness	E Space Between Legs	F Worksurface-to-Floor	G Support Frame-to-Floor	H Worksurface Edge-to-Leg Mounting Bracket	I Leg Set-back	J Leg Inset
PKAFA2448	23 ¹ / ₂ "	46 ¹ / ₂ "	22 ³ / ₁₆ " - 48 ⁵ / ₁₆ "	3/4"	37"	21 ³ / ₈ " - 47 ⁹ / ₁₆ "	19 ³ / ₈ " - 45 ⁹ / ₁₆ "	1 ⁹ / ₁₆ "	10 ¹ / ₈ "	10 ¹ / ₈ "
			22 ¹¹ / ₁₆ " - 48 ¹³ / ₁₆ "	1 1/4"						
PKAFA2454	23 ¹ / ₂ "	52 ¹ / ₂ "	22 ³ / ₁₆ " - 48 ⁵ / ₁₆ "	3/4"	43"	21 ³ / ₈ " - 47 ⁹ / ₁₆ "	19 ³ / ₈ " - 45 ⁹ / ₁₆ "	1 ⁹ / ₁₆ "	10 ¹ / ₈ "	10 ¹ / ₈ "
			22 ¹¹ / ₁₆ " - 48 ¹³ / ₁₆ "	1 1/4"						
PKAFA2460	23 ¹ / ₂ "	58 ¹ / ₂ "	22 ³ / ₁₆ " - 48 ⁵ / ₁₆ "	3/4"	49"	21 ³ / ₈ " - 47 ⁹ / ₁₆ "	19 ³ / ₈ " - 45 ⁹ / ₁₆ "	1 ⁹ / ₁₆ "	10 ¹ / ₈ "	10 ¹ / ₈ "
			22 ¹¹ / ₁₆ " - 48 ¹³ / ₁₆ "	1 1/4"						
PKAFA2466	23 ¹ / ₂ "	64 ¹ / ₂ "	22 ³ / ₁₆ " - 48 ⁵ / ₁₆ "	3/4"	55"	21 ³ / ₈ " - 47 ⁹ / ₁₆ "	19 ³ / ₈ " - 45 ⁹ / ₁₆ "	1 ⁹ / ₁₆ "	10 ¹ / ₈ "	10 ¹ / ₈ "
			22 ¹¹ / ₁₆ " - 48 ¹³ / ₁₆ "	1 1/4"						
PKAFA2472	23 ¹ / ₂ "	70 ¹ / ₂ "	22 ³ / ₁₆ " - 48 ⁵ / ₁₆ "	3/4"	58 ³ / ₄ "	21 ³ / ₈ " - 47 ⁹ / ₁₆ "	19 ³ / ₈ " - 45 ⁹ / ₁₆ "	2 ¹ / ₁₆ "	10 ¹ / ₈ "	10 ¹ / ₈ "
			22 ¹¹ / ₁₆ " - 48 ¹³ / ₁₆ "	1 1/4"						
PKAFA3048	29 ¹ / ₂ "	46 ¹ / ₂ "	22 ³ / ₁₆ " - 48 ⁵ / ₁₆ "	3/4"	37"	21 ³ / ₈ " - 47 ⁹ / ₁₆ "	19 ³ / ₈ " - 45 ⁹ / ₁₆ "	1 ⁹ / ₁₆ "	13 ¹ / ₈ "	13 ¹ / ₈ "
			22 ¹¹ / ₁₆ " - 48 ¹³ / ₁₆ "	1 1/4"						
PKAFA3054	29 ¹ / ₂ "	52 ¹ / ₂ "	22 ³ / ₁₆ " - 48 ⁵ / ₁₆ "	3/4"	43"	21 ³ / ₈ " - 47 ⁹ / ₁₆ "	19 ³ / ₈ " - 45 ⁹ / ₁₆ "	1 ⁹ / ₁₆ "	13 ¹ / ₈ "	13 ¹ / ₈ "
			22 ¹¹ / ₁₆ " - 48 ¹³ / ₁₆ "	1 1/4"						
PKAFA3060	29 ¹ / ₂ "	58 ¹ / ₂ "	22 ³ / ₁₆ " - 48 ⁵ / ₁₆ "	3/4"	49"	21 ³ / ₈ " - 47 ⁹ / ₁₆ "	19 ³ / ₈ " - 45 ⁹ / ₁₆ "	1 ⁹ / ₁₆ "	13 ¹ / ₈ "	13 ¹ / ₈ "
			22 ¹¹ / ₁₆ " - 48 ¹³ / ₁₆ "	1 1/4"						
PKAFA3066	29 ¹ / ₂ "	64 ¹ / ₂ "	22 ³ / ₁₆ " - 48 ⁵ / ₁₆ "	3/4"	55"	21 ³ / ₈ " - 47 ⁹ / ₁₆ "	19 ³ / ₈ " - 45 ⁹ / ₁₆ "	1 ⁹ / ₁₆ "	13 ¹ / ₈ "	13 ¹ / ₈ "
			22 ¹¹ / ₁₆ " - 48 ¹³ / ₁₆ "	1 1/4"						
PKAFA3072	29 ¹ / ₂ "	70 ¹ / ₂ "	22 ³ / ₁₆ " - 48 ⁵ / ₁₆ "	3/4"	58 ³ / ₄ "	21 ³ / ₈ " - 47 ⁹ / ₁₆ "	19 ³ / ₈ " - 45 ⁹ / ₁₆ "	2 ¹ / ₁₆ "	13 ¹ / ₈ "	13 ¹ / ₈ "
			22 ¹¹ / ₁₆ " - 48 ¹³ / ₁₆ "	1 1/4"						


(model PKAFA2448-73P with glide base shown)

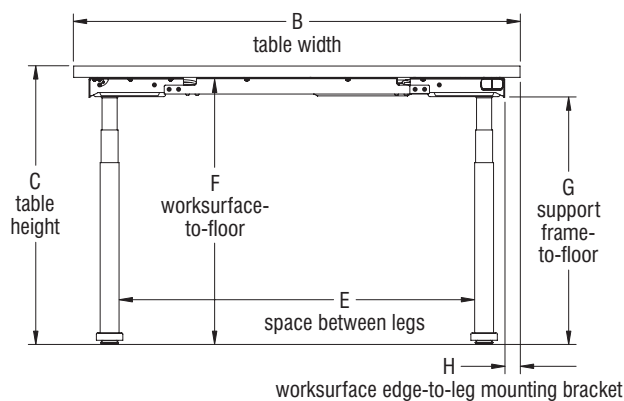

(front view)

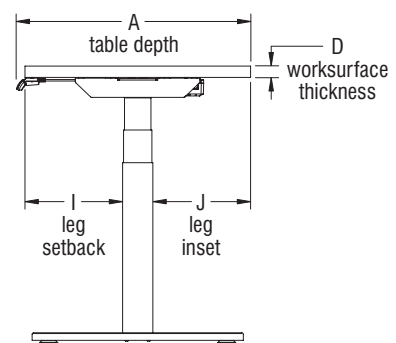

(side view)

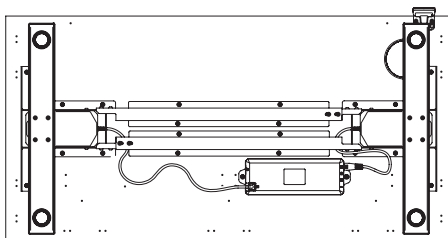

(bottom view)

Note: Table height dimensions in the chart above represent tables with glide bases. If the table has a caster base, 1" must be added to the "table height" column in the chart.

DIMENSIONS

Passel Worksurface Screens - Fabric (square corners)

Model Number	A Overall Screen Depth	B Overall Screen Width	C Overall Screen Height	D Screen Bottom- to-Floor	E Screen Top- to-Worksurface Top	F Worksurface Edge-to-Screen	Number of Brackets
PKDFA2424	27 ⁷ / ₈ "	24 ⁷ / ₈ "	23 ¹ / ₂ "	15 ⁵ / ₈ "-41 ³ / ₄ "	16 ⁵ / ₈ "	3 ³ / ₄ "	2
PKDFA3024	27 ⁷ / ₈ "	30 ⁷ / ₈ "	23 ¹ / ₂ "	15 ⁵ / ₈ "-41 ³ / ₄ "	16 ⁵ / ₈ "	3 ³ / ₄ "	2
PKDFA4224	27 ⁷ / ₈ "	41 ⁷ / ₈ "	23 ¹ / ₂ "	15 ⁵ / ₈ "-41 ³ / ₄ "	16 ⁵ / ₈ "	3 ³ / ₄ "	2
PKDFA4824	27 ⁷ / ₈ "	47 ⁷ / ₈ "	23 ¹ / ₂ "	15 ⁵ / ₈ "-41 ³ / ₄ "	16 ⁵ / ₈ "	3 ³ / ₄ "	2
PKDFA5424	27 ⁷ / ₈ "	53 ⁷ / ₈ "	23 ¹ / ₂ "	15 ⁵ / ₈ "-41 ³ / ₄ "	16 ⁵ / ₈ "	3 ³ / ₄ "	3
PKDFA6024	27 ⁷ / ₈ "	59 ⁷ / ₈ "	23 ¹ / ₂ "	15 ⁵ / ₈ "-41 ³ / ₄ "	16 ⁵ / ₈ "	3 ³ / ₄ "	3
PKDFA6624	27 ⁷ / ₈ "	65 ⁷ / ₈ "	23 ¹ / ₂ "	15 ⁵ / ₈ "-41 ³ / ₄ "	16 ⁵ / ₈ "	3 ³ / ₄ "	3
PKDFA7224	27 ⁷ / ₈ "	71 ⁷ / ₈ "	23 ¹ / ₂ "	15 ⁵ / ₈ "-41 ³ / ₄ "	16 ⁵ / ₈ "	3 ³ / ₄ "	3
PKDFA2430	27 ⁷ / ₈ "	24 ⁷ / ₈ "	29 ¹ / ₂ "	15 ⁵ / ₈ "-41 ³ / ₄ "	22 ⁵ / ₈ "	3 ³ / ₄ "	2
PKDFA3030	27 ⁷ / ₈ "	30 ⁷ / ₈ "	29 ¹ / ₂ "	15 ⁵ / ₈ "-41 ³ / ₄ "	22 ⁵ / ₈ "	3 ³ / ₄ "	2
PKDFA4230	27 ⁷ / ₈ "	41 ⁷ / ₈ "	29 ¹ / ₂ "	15 ⁵ / ₈ "-41 ³ / ₄ "	22 ⁵ / ₈ "	3 ³ / ₄ "	2
PKDFA4830	27 ⁷ / ₈ "	47 ⁷ / ₈ "	29 ¹ / ₂ "	15 ⁵ / ₈ "-41 ³ / ₄ "	22 ⁵ / ₈ "	3 ³ / ₄ "	2
PKDFA5430	27 ⁷ / ₈ "	53 ⁷ / ₈ "	29 ¹ / ₂ "	15 ⁵ / ₈ "-41 ³ / ₄ "	22 ⁵ / ₈ "	3 ³ / ₄ "	3
PKDFA6030	27 ⁷ / ₈ "	59 ⁷ / ₈ "	29 ¹ / ₂ "	15 ⁵ / ₈ "-41 ³ / ₄ "	22 ⁵ / ₈ "	3 ³ / ₄ "	3
PKDFA6630	27 ⁷ / ₈ "	65 ⁷ / ₈ "	29 ¹ / ₂ "	15 ⁵ / ₈ "-41 ³ / ₄ "	22 ⁵ / ₈ "	3 ³ / ₄ "	3
PKDFA7230	27 ⁷ / ₈ "	71 ⁷ / ₈ "	29 ¹ / ₂ "	15 ⁵ / ₈ "-41 ³ / ₄ "	22 ⁵ / ₈ "	3 ³ / ₄ "	3

The chart above references dimension illustrations on page 7.

Passel Worksurface Screens - Felt (square corners)

Model Number	A Overall Screen Depth	B Overall Screen Width	C Overall Screen Height	D Screen Bottom- to-Floor	E Screen Top- to-Worksurface Top	F Worksurface Edge-to-Screen	Number of Brackets
PKDPF2424R0	27 ⁷ / ₈ "	24 ⁷ / ₈ "	23 ¹ / ₂ "	15 ⁵ / ₈ "-41 ³ / ₄ "	16 ⁵ / ₈ "	3 ³ / ₄ "	2
PKDPF3024R0	27 ⁷ / ₈ "	30 ⁷ / ₈ "	23 ¹ / ₂ "	15 ⁵ / ₈ "-41 ³ / ₄ "	16 ⁵ / ₈ "	3 ³ / ₄ "	2
PKDPF4224R0	27 ⁷ / ₈ "	41 ⁷ / ₈ "	23 ¹ / ₂ "	15 ⁵ / ₈ "-41 ³ / ₄ "	16 ⁵ / ₈ "	3 ³ / ₄ "	2
PKDPF4824R0	27 ⁷ / ₈ "	47 ⁷ / ₈ "	23 ¹ / ₂ "	15 ⁵ / ₈ "-41 ³ / ₄ "	16 ⁵ / ₈ "	3 ³ / ₄ "	2
PKDPF5424R0	27 ⁷ / ₈ "	53 ⁷ / ₈ "	23 ¹ / ₂ "	15 ⁵ / ₈ "-41 ³ / ₄ "	16 ⁵ / ₈ "	3 ³ / ₄ "	3
PKDPF6024R0	27 ⁷ / ₈ "	59 ⁷ / ₈ "	23 ¹ / ₂ "	15 ⁵ / ₈ "-41 ³ / ₄ "	16 ⁵ / ₈ "	3 ³ / ₄ "	3
PKDPF6624R0	27 ⁷ / ₈ "	65 ⁷ / ₈ "	23 ¹ / ₂ "	15 ⁵ / ₈ "-41 ³ / ₄ "	16 ⁵ / ₈ "	3 ³ / ₄ "	3
PKDPF7224R0	27 ⁷ / ₈ "	71 ⁷ / ₈ "	23 ¹ / ₂ "	15 ⁵ / ₈ "-41 ³ / ₄ "	16 ⁵ / ₈ "	3 ³ / ₄ "	3
PKDPF2430R0	27 ⁷ / ₈ "	24 ⁷ / ₈ "	29 ¹ / ₂ "	15 ⁵ / ₈ "-41 ³ / ₄ "	22 ⁵ / ₈ "	3 ³ / ₄ "	2
PKDPF3030R0	27 ⁷ / ₈ "	30 ⁷ / ₈ "	29 ¹ / ₂ "	15 ⁵ / ₈ "-41 ³ / ₄ "	22 ⁵ / ₈ "	3 ³ / ₄ "	2
PKDPF4230R0	27 ⁷ / ₈ "	41 ⁷ / ₈ "	29 ¹ / ₂ "	15 ⁵ / ₈ "-41 ³ / ₄ "	22 ⁵ / ₈ "	3 ³ / ₄ "	2
PKDPF4830R0	27 ⁷ / ₈ "	47 ⁷ / ₈ "	29 ¹ / ₂ "	15 ⁵ / ₈ "-41 ³ / ₄ "	22 ⁵ / ₈ "	3 ³ / ₄ "	2
PKDPF5430R0	27 ⁷ / ₈ "	53 ⁷ / ₈ "	29 ¹ / ₂ "	15 ⁵ / ₈ "-41 ³ / ₄ "	22 ⁵ / ₈ "	3 ³ / ₄ "	3
PKDPF6030R0	27 ⁷ / ₈ "	59 ⁷ / ₈ "	29 ¹ / ₂ "	15 ⁵ / ₈ "-41 ³ / ₄ "	22 ⁵ / ₈ "	3 ³ / ₄ "	3
PKDPF6630R0	27 ⁷ / ₈ "	65 ⁷ / ₈ "	29 ¹ / ₂ "	15 ⁵ / ₈ "-41 ³ / ₄ "	22 ⁵ / ₈ "	3 ³ / ₄ "	3
PKDPF7230R0	27 ⁷ / ₈ "	71 ⁷ / ₈ "	29 ¹ / ₂ "	15 ⁵ / ₈ "-41 ³ / ₄ "	22 ⁵ / ₈ "	3 ³ / ₄ "	3

The chart above references dimension illustrations on page 7.

DIMENSIONS

Passel Worksurface Screens - Felt (one rounded corner)

Model Number	A Overall Screen Depth	B Overall Screen Width	C Overall Screen Height	D Screen Bottom- to-Floor	E Screen Top-to- Worksurface Top	F Worksurface Edge-to-Screen	Number of Brackets
PKDPF2424RI	27 ⁷ / ₈ "	247 ⁷ / ₈ "	231 ¹ / ₂ "	155 ⁵ / ₈ "-413 ³ / ₄ "	165 ⁵ / ₈ "	3 ³ / ₄ "	2
PKDPF3024RI	27 ⁷ / ₈ "	307 ⁷ / ₈ "	231 ¹ / ₂ "	155 ⁵ / ₈ "-413 ³ / ₄ "	165 ⁵ / ₈ "	3 ³ / ₄ "	2
PKDPF4224RI	27 ⁷ / ₈ "	417 ⁷ / ₈ "	231 ¹ / ₂ "	155 ⁵ / ₈ "-413 ³ / ₄ "	165 ⁵ / ₈ "	3 ³ / ₄ "	2
PKDPF4824RI	27 ⁷ / ₈ "	477 ⁷ / ₈ "	231 ¹ / ₂ "	155 ⁵ / ₈ "-413 ³ / ₄ "	165 ⁵ / ₈ "	3 ³ / ₄ "	2
PKDPF5424RI	27 ⁷ / ₈ "	537 ⁷ / ₈ "	231 ¹ / ₂ "	155 ⁵ / ₈ "-413 ³ / ₄ "	165 ⁵ / ₈ "	3 ³ / ₄ "	3
PKDPF6024RI	27 ⁷ / ₈ "	597 ⁷ / ₈ "	231 ¹ / ₂ "	155 ⁵ / ₈ "-413 ³ / ₄ "	165 ⁵ / ₈ "	3 ³ / ₄ "	3
PKDPF6624RI	27 ⁷ / ₈ "	657 ⁷ / ₈ "	231 ¹ / ₂ "	155 ⁵ / ₈ "-413 ³ / ₄ "	165 ⁵ / ₈ "	3 ³ / ₄ "	3
PKDPF7224RI	27 ⁷ / ₈ "	717 ⁷ / ₈ "	231 ¹ / ₂ "	155 ⁵ / ₈ "-413 ³ / ₄ "	165 ⁵ / ₈ "	3 ³ / ₄ "	3
PKDPF2430RI	27 ⁷ / ₈ "	247 ⁷ / ₈ "	291 ¹ / ₂ "	155 ⁵ / ₈ "-413 ³ / ₄ "	225 ⁵ / ₈ "	3 ³ / ₄ "	2
PKDPF3030RI	27 ⁷ / ₈ "	307 ⁷ / ₈ "	291 ¹ / ₂ "	155 ⁵ / ₈ "-413 ³ / ₄ "	225 ⁵ / ₈ "	3 ³ / ₄ "	2
PKDPF4230RI	27 ⁷ / ₈ "	417 ⁷ / ₈ "	291 ¹ / ₂ "	155 ⁵ / ₈ "-413 ³ / ₄ "	225 ⁵ / ₈ "	3 ³ / ₄ "	2
PKDPF4830RI	27 ⁷ / ₈ "	477 ⁷ / ₈ "	291 ¹ / ₂ "	155 ⁵ / ₈ "-413 ³ / ₄ "	225 ⁵ / ₈ "	3 ³ / ₄ "	2
PKDPF5430RI	27 ⁷ / ₈ "	537 ⁷ / ₈ "	291 ¹ / ₂ "	155 ⁵ / ₈ "-413 ³ / ₄ "	225 ⁵ / ₈ "	3 ³ / ₄ "	3
PKDPF6030RI	27 ⁷ / ₈ "	597 ⁷ / ₈ "	291 ¹ / ₂ "	155 ⁵ / ₈ "-413 ³ / ₄ "	225 ⁵ / ₈ "	3 ³ / ₄ "	3
PKDPF6630RI	27 ⁷ / ₈ "	657 ⁷ / ₈ "	291 ¹ / ₂ "	155 ⁵ / ₈ "-413 ³ / ₄ "	225 ⁵ / ₈ "	3 ³ / ₄ "	3
PKDPF7230RI	27 ⁷ / ₈ "	717 ⁷ / ₈ "	291 ¹ / ₂ "	155 ⁵ / ₈ "-413 ³ / ₄ "	225 ⁵ / ₈ "	3 ³ / ₄ "	3

The chart above references dimension illustrations on page 7.



Passel Worksurface Screens - Felt (two rounded corners)

Model Number	A Overall Screen Depth	B Overall Screen Width	C Overall Screen Height	D Screen Bottom- to-Floor	E Screen Top-to- Worksurface Top	F Worksurface Edge-to-Screen	Number of Brackets
PKDPF2424R2	27 ⁷ / ₈ "	247 ⁷ / ₈ "	231 ¹ / ₂ "	155 ⁵ / ₈ "-413 ³ / ₄ "	165 ⁵ / ₈ "	3 ³ / ₄ "	2
PKDPF3024R2	27 ⁷ / ₈ "	307 ⁷ / ₈ "	231 ¹ / ₂ "	155 ⁵ / ₈ "-413 ³ / ₄ "	165 ⁵ / ₈ "	3 ³ / ₄ "	2
PKDPF4224R2	27 ⁷ / ₈ "	417 ⁷ / ₈ "	231 ¹ / ₂ "	155 ⁵ / ₈ "-413 ³ / ₄ "	165 ⁵ / ₈ "	3 ³ / ₄ "	2
PKDPF4824R2	27 ⁷ / ₈ "	477 ⁷ / ₈ "	231 ¹ / ₂ "	155 ⁵ / ₈ "-413 ³ / ₄ "	165 ⁵ / ₈ "	3 ³ / ₄ "	2
PKDPF5424R2	27 ⁷ / ₈ "	537 ⁷ / ₈ "	231 ¹ / ₂ "	155 ⁵ / ₈ "-413 ³ / ₄ "	165 ⁵ / ₈ "	3 ³ / ₄ "	3
PKDPF6024R2	27 ⁷ / ₈ "	597 ⁷ / ₈ "	231 ¹ / ₂ "	155 ⁵ / ₈ "-413 ³ / ₄ "	165 ⁵ / ₈ "	3 ³ / ₄ "	3
PKDPF6624R2	27 ⁷ / ₈ "	657 ⁷ / ₈ "	231 ¹ / ₂ "	155 ⁵ / ₈ "-413 ³ / ₄ "	165 ⁵ / ₈ "	3 ³ / ₄ "	3
PKDPF7224R2	27 ⁷ / ₈ "	717 ⁷ / ₈ "	231 ¹ / ₂ "	155 ⁵ / ₈ "-413 ³ / ₄ "	165 ⁵ / ₈ "	3 ³ / ₄ "	3
PKDPF2430R2	27 ⁷ / ₈ "	247 ⁷ / ₈ "	291 ¹ / ₂ "	155 ⁵ / ₈ "-413 ³ / ₄ "	225 ⁵ / ₈ "	3 ³ / ₄ "	2
PKDPF3030R2	27 ⁷ / ₈ "	307 ⁷ / ₈ "	291 ¹ / ₂ "	155 ⁵ / ₈ "-413 ³ / ₄ "	225 ⁵ / ₈ "	3 ³ / ₄ "	2
PKDPF4230R2	27 ⁷ / ₈ "	417 ⁷ / ₈ "	291 ¹ / ₂ "	155 ⁵ / ₈ "-413 ³ / ₄ "	225 ⁵ / ₈ "	3 ³ / ₄ "	2
PKDPF4830R2	27 ⁷ / ₈ "	477 ⁷ / ₈ "	291 ¹ / ₂ "	155 ⁵ / ₈ "-413 ³ / ₄ "	225 ⁵ / ₈ "	3 ³ / ₄ "	2
PKDPF5430R2	27 ⁷ / ₈ "	537 ⁷ / ₈ "	291 ¹ / ₂ "	155 ⁵ / ₈ "-413 ³ / ₄ "	225 ⁵ / ₈ "	3 ³ / ₄ "	3
PKDPF6030R2	27 ⁷ / ₈ "	597 ⁷ / ₈ "	291 ¹ / ₂ "	155 ⁵ / ₈ "-413 ³ / ₄ "	225 ⁵ / ₈ "	3 ³ / ₄ "	3
PKDPF6630R2	27 ⁷ / ₈ "	657 ⁷ / ₈ "	291 ¹ / ₂ "	155 ⁵ / ₈ "-413 ³ / ₄ "	225 ⁵ / ₈ "	3 ³ / ₄ "	3
PKDPF7230R2	27 ⁷ / ₈ "	717 ⁷ / ₈ "	291 ¹ / ₂ "	155 ⁵ / ₈ "-413 ³ / ₄ "	225 ⁵ / ₈ "	3 ³ / ₄ "	3

The chart above references dimension illustrations on page 7.



DIMENSIONS

Passel Worksurface Screens - (models PKFFA2448-73P with glide base, PKDFA4824, & PKDFA2424 shown)

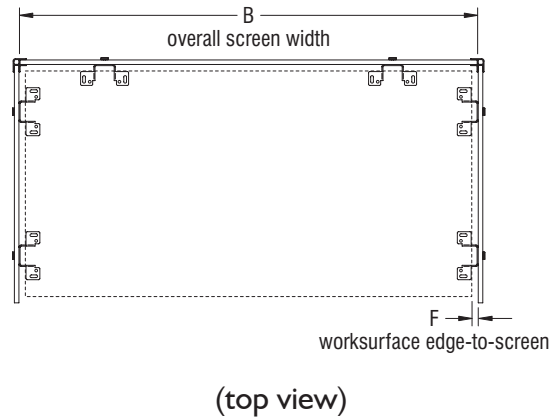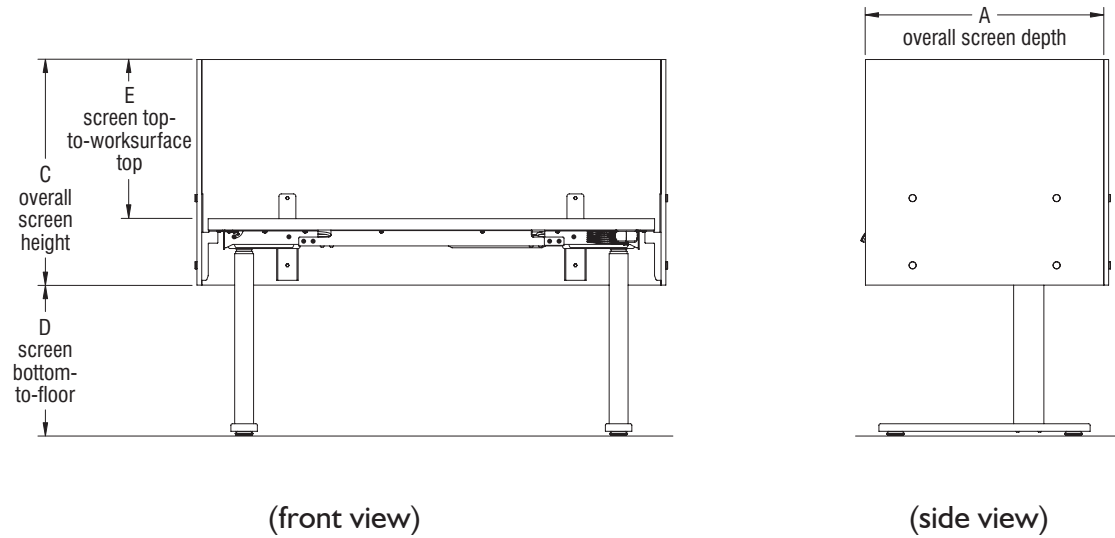


DIMENSIONS


Passel Cable Tray - (model PKCA36 shown)



(side view)

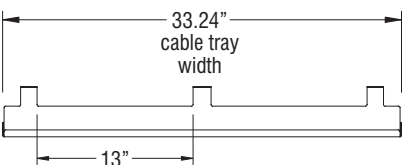

(front view)

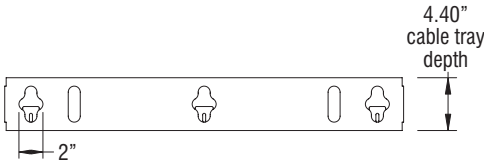


(bottom view)

CODE COMPLIANCE




STATEMENT OF LINE

Passel Adjustable-Height Tables




PKFFA2448 PKFFA3048
PKFFA2454 PKFFA3054
PKFFA2460 PKFFA3060
PKFFA2466 PKFFA3066
PKFFA2472 PKFFA3072




PKAFA2448 PKAFA3048
PKAFA2454 PKAFA3054
PKAFA2460 PKAFA3060
PKAFA2466 PKAFA3066
PKAFA2472 PKAFA3072

Passel Worksurface Screens




Fabric
Square Corners

PKDFA2424 PKDFA2430
PKDFA3024 PKDFA3030
PKDFA4224 PKDFA4230
PKDFA4824 PKDFA4830
PKDFA5424 PKDFA5430
PKDFA6024 PKDFA6030
PKDFA6624 PKDFA6630
PKDFA7224 PKDFA7230




Polyester Felt
Square Corners

PKDPF2424R0 PKDPF2430R0
PKDPF3024R0 PKDPF3030R0
PKDPF4224R0 PKDPF4230R0
PKDPF4824R0 PKDPF4830R0
PKDPF5424R0 PKDPF5430R0
PKDPF6024R0 PKDPF6030R0
PKDPF6624R0 PKDPF6630R0
PKDPF7224R0 PKDPF7230R0



Polyester Felt
One Rounded Corner

PKDPF2424R1 PKDPF2430R1
PKDPF3024R1 PKDPF3030R1
PKDPF4224R1 PKDPF4230R1
PKDPF4824R1 PKDPF4830R1
PKDPF5424R1 PKDPF5430R1
PKDPF6024R1 PKDPF6030R1
PKDPF6624R1 PKDPF6630R1
PKDPF7224R1 PKDPF7230R1



Polyester Felt
Two Rounded Corners


PKDPF2424R2 PKDPF2430R2
PKDPF3024R2 PKDPF3030R2
PKDPF4224R2 PKDPF4230R2
PKDPF4824R2 PKDPF4830R2
PKDPF5424R2 PKDPF5430R2
PKDPF6024R2 PKDPF6030R2
PKDPF6624R2 PKDPF6630R2
PKDPF7224R2 PKDPF7230R2



Screen Corner Connector

PKDSC24
PKDSC30

Passel Cable Tray



PKCA36

CODE COMPLIANCE

