

In Compliance with the Americans with Disabilities Act....

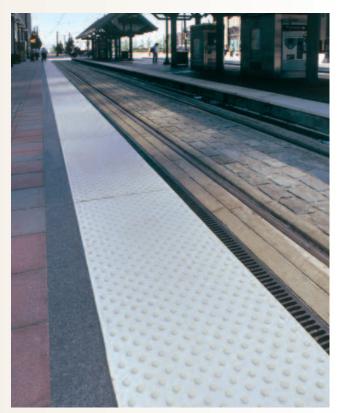


Please contact us for your color options.

Color: U1009

Our ADA warning unit meets the technical specifications of the ADA guidelines for application, design and installation. These concrete warning pavers are available in light and dark colors to contrast with adjoining surfaces.



12" ADA PAVER



Terra-Pavers Physical Properties Based on 2" Thick Paver					
PROPERTY	V ALUE	TEST METHOD	PROPERTY	V ALUE	Test Method
Compressive Strength	=>8,000 PSI Avg.	ASTM C140	Freeze Thaw	=< 1% loss of dry	ASTM C67
Flexural Strength	=>700 PSI Avg.	ASTM C293		weight (50 cycles)	
Water Absorption	< 5%-6%	ASTM C140	Center Load	1,850 lbs.	WTCL 99

Terra-Paver finishes and colors shown are only a representation of the actual colors. Request samples for approved colors and finishes.

Color: FDX 7008

Tactile Warning Strips for stairs, landings and ramps. Available in all of our standard sizes.

Terra-Pavers Product Summary

Standard Sizes (Nominal): 12" or 24" square

Thickness: 2" to 2 3/4" Weight: 24 to 32 1/2 lbs./sq.ft.

Dimensional Tolerance: +/- 1/16" (Length, Width, Height, Convex, Concave)



Terra-Paving Division 9001 Bus. Hwy. 51 P.O. Box 1520 Wausau, WI 54402-1520 (715) 359-3121 Fax: (715) 359-7456 (800) 388-8728

www.wausautile.com E-mail: wtile@wausautile.com





Wausau Tile America's One Source

In Compliance with the Americans with Disabilities Act....







ADA-3 Truncated Dome

1-800-388-8728 www.wausautile.com

