



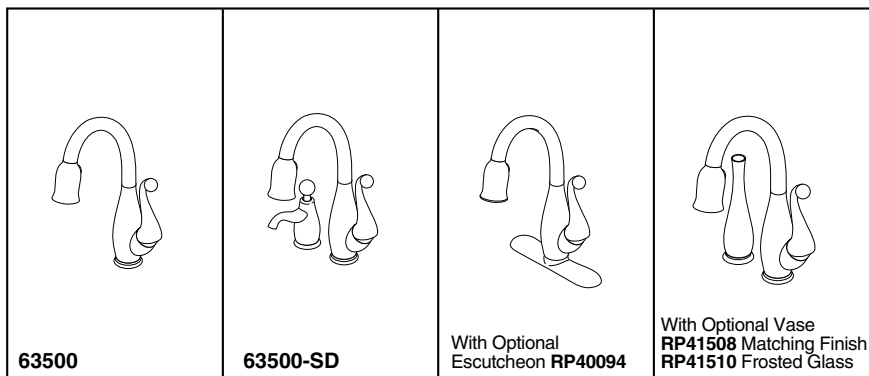

Submitted Model No.: _____

Specific Features: _____

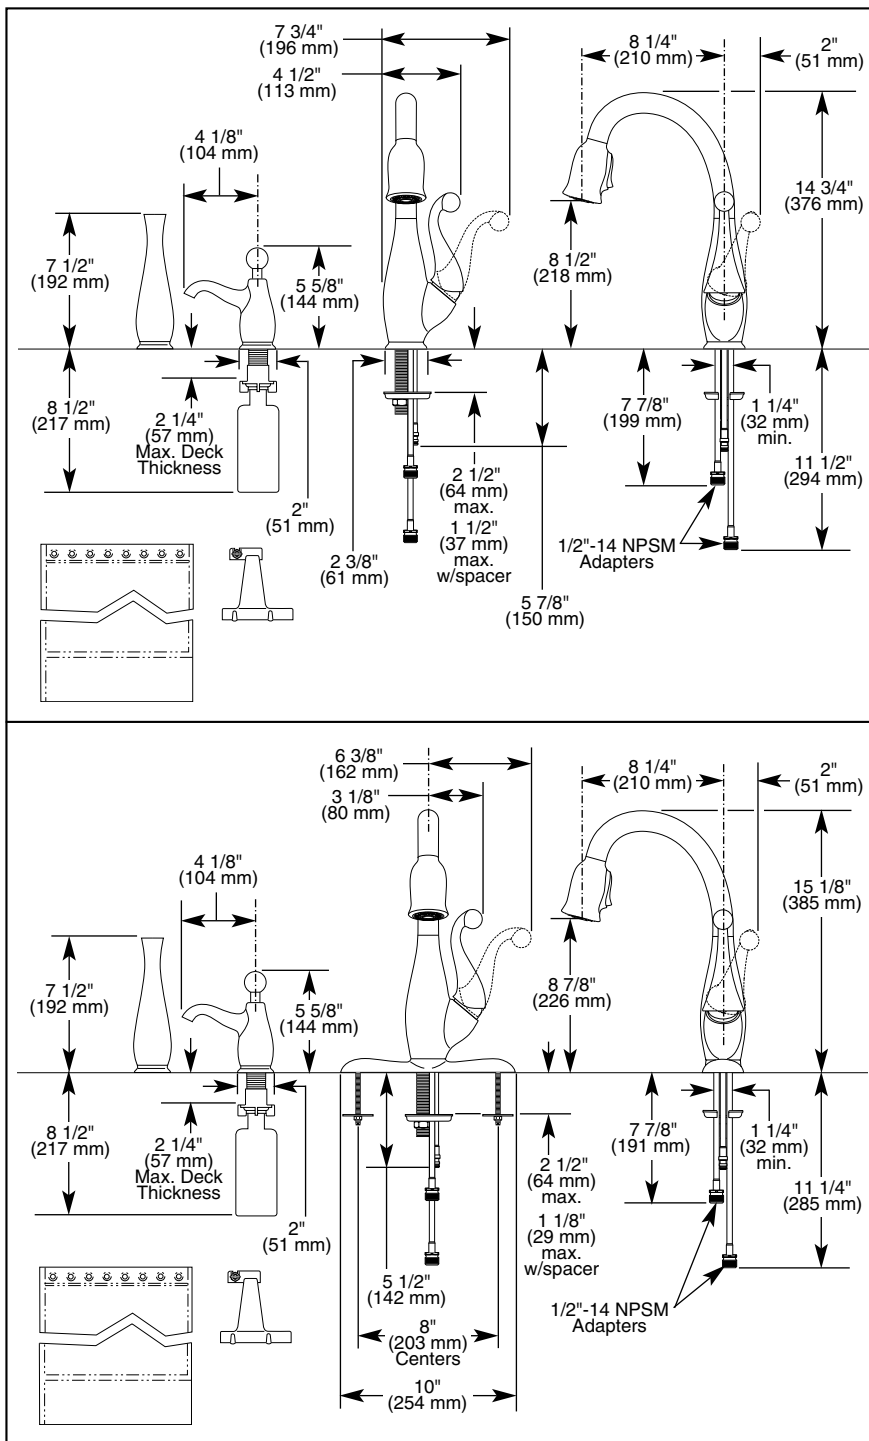

BRIZO™

KITCHEN FAUCETS

- Floriano™ Collection
- Single Handle Deck Mount
- 2-Function Pull-Down
- Single, 2 or 3 Hole Sink Applications
- Centermount or 8" (203 mm) Centers with Optional 10" (254 mm) Escutcheon
- Optional Vase Interchangeable with Soap Dispenser




COMPLIES WITH:

- ASME A112.18.1
- CSA B125
- ICC/ANSI A117.1/ADA

STANDARD SPECIFICATIONS:

- Single handle, 2-function pull-down kitchen faucets for exposed mounting on single, two and three hole sinks.
- Solid brass fabricated body.
- 14 3/4" (376 mm) high, 8 1/4" (210 mm) long, spout swings 360°.
- Lever handle. Control mechanism shall be of the rotating stainless steel ball type with replaceable non-metallic seats operating in stainless steel lined sockets.
- Control shall return to neutral position when faucet is turned off.
- Touch-Clean® sprayhead.
- Quick connect hoses.
- Pull-down wand operates in an aerated or spray mode via an ergonomic toggle diverter.
- Red/blue graphics on handle button to indicate hot/cold temperature.
- Tangle-free bag for hose.
- Twist and lock mechanism eliminates spray head wobble.
- Thin deck mounting aid to help secure product if used on thin sinks.
- Dual integral check valves in sprayer assembly.
- Integrated removable debris screen in sprayer assembly.
- Disposable hose lead to aid installation.
- Spacer for mounting nut to reduce number of turns required for installation.
- Mounting wrench to assist in tightening mounting nut securely.
- Hose guards integral to casting reduces wear and noise on hose.
- Hose travels inside mounting shank so it will not interfere with deck edges.
- Keyed trim ring and 10" (254 mm) escutcheon to help alignment and aid installation.

Note: See 63510-* for matching bar/prep.

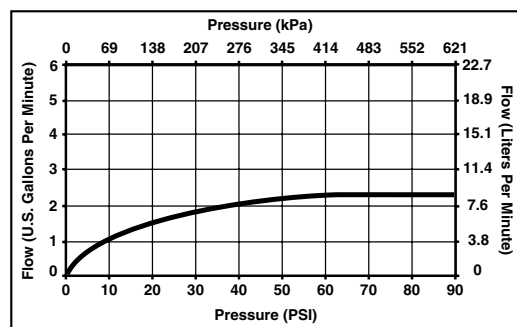

Standard Features	63500-*	63500-SD
Washerless	◆	◆
Centermount Installation	◆	
Two Hole Installation		◆
2 1/2" (64 mm) Thick Deck Installation Capability	◆	◆
Touch-Clean® Spray Head	◆	◆
Lever Handle		
14 3/4" (376 mm) High, 8 1/4" (210 mm) Long, Spout Swings 360°.	◆	◆
3/8" O.D. Straight, Staggered Copper Supply Tubes – 7 7/8" (199 mm) and 11 1/2" (294 mm) Long	◆	◆
Standard with 1/2"-14 NPSM Adapters	◆	◆
Wand Matches Finish	◆	◆
Soap/Lotion Dispenser		◆
Red/Blue Graphics on Handle Button to Indicate Hot/Cold Temperature	◆	◆

*To specify finish add suffix

Available Finishes

Suffix	Finish
PC	Polished Chrome
SS	<i>Brilliance</i> ® Stainless
WH	White