



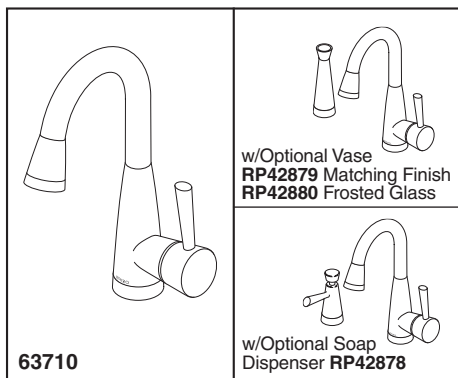

Submitted Model No.: _____

Specific Features: _____

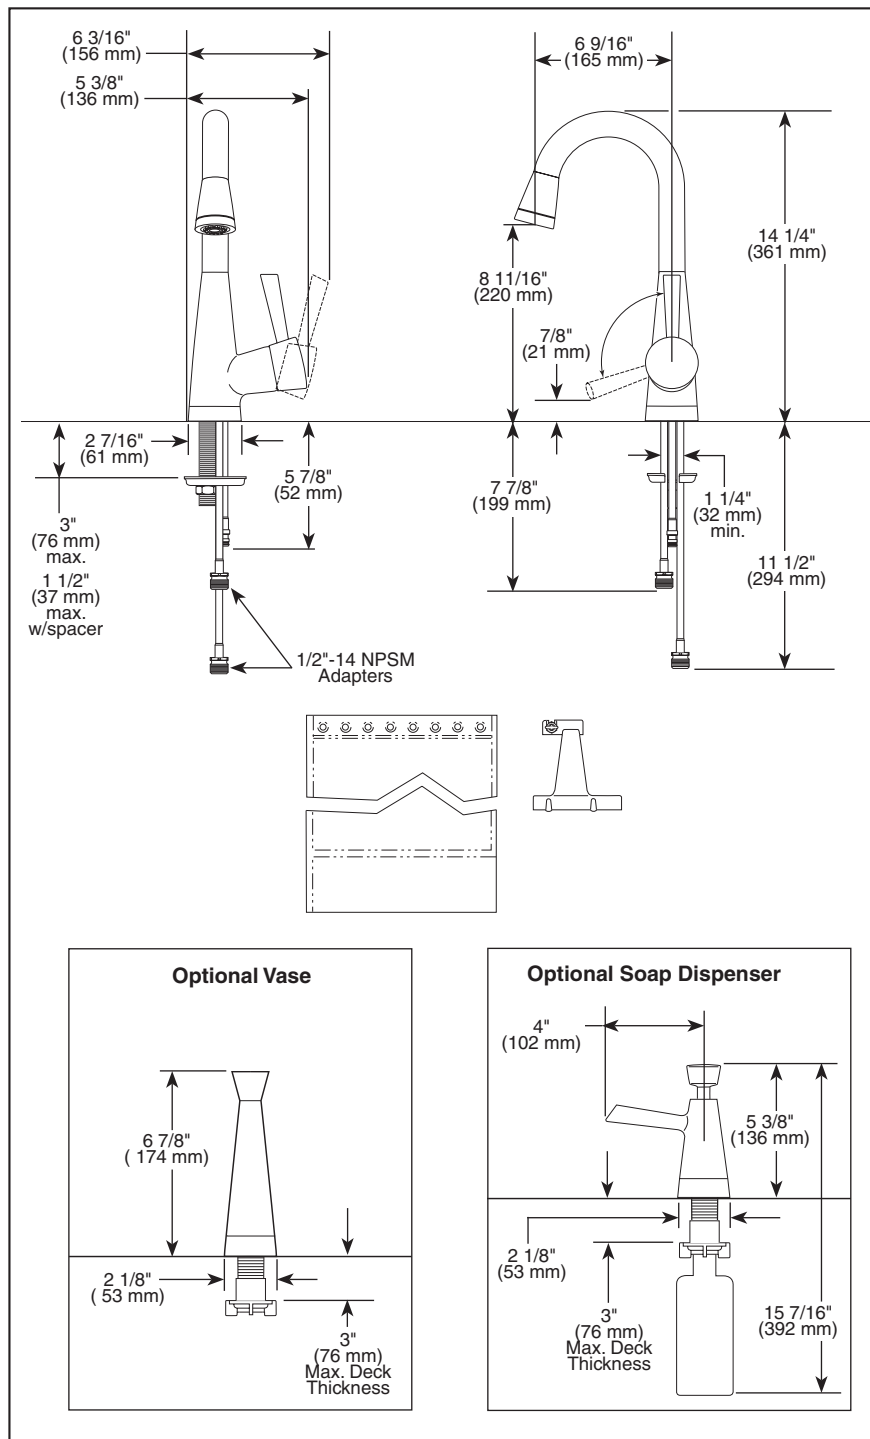

BRIZO™

BAR/PREP SINK FAUCETS

- Venuto™ Collection
- Single Handle Deck Mount
- 2-Function Pull-Down
- Single or 2 Hole Sink Applications
- Optional Vase Interchangeable with Soap Dispenser




COMPLIES WITH:

- ASME A112.18.1
- CSA B125
- ICC/ANSI A117.1/ADA

STANDARD SPECIFICATIONS:

- Single handle bar/prep sink faucets for exposed mounting on single hole sinks.
- Solid brass fabricated body.
- 14 1/4" (361 mm) high, 6 9/16" (165 mm) long, spout swings 360°.
- Lever handle. Control mechanism shall be of the rotating stainless steel ball type with replaceable non-metallic seats operating in stainless steel lined sockets.
- Quick connect hoses.
- Tangle-free bag for hose.
- Twist and lock mechanism eliminates spray head wobble.
- Red/Blue indicator on handle for hot/cold temperature.
- Dual integral check valves in sprayer assembly.
- Disposable hose lead to aide installation.
- Spacer for mounting nut to reduce number of turns required for installation.
- Mounting wrench to assist in tightening mounting nut securely.
- Hose travels inside mounting shank so it will not interfere with deck edges.
- Matching trim ring.

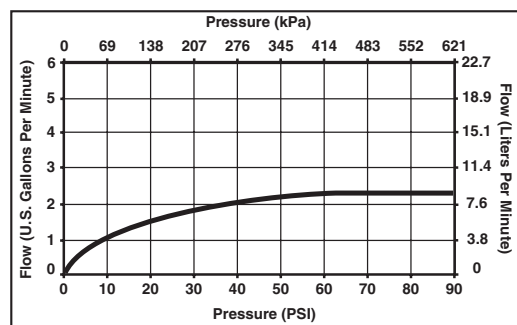

Standard Features	63710 -*
Washerless	◆
Single Hole Installation	◆
3" (76 mm) Thick Deck Installation Capability	◆
Lever Handle	
14 1/4" (3361 mm) High, 6 9/16" (165 mm) Long, Spout Swings 360°.	◆
3/8" O.D. Straight, Staggered Copper Supply Tubes – 7 7/8" (199 mm) and 11 1/2" (294 mm) Long	◆
Standard with 1/2"-14 NPSM Adapters	◆
Wand Matches Finish	◆
Red/Blue Indicator on Handle to Indicate Hot/Cold Temperature	◆

To specify finish add suffix

Available Finishes

Suffix	Finish
PC	Polished Chrome
SS	<i>Brilliance</i> ® Stainless
SSST	<i>Brilliance</i> ® Stainless/Soft-Touch® Black Accents
BLST	Matte Black/Soft-Touch® Black Accents