
TF 1051 Model D Waste Container w/ Hooded Top & Plastic Door



Options

(Note: Options may change without notice. Call to confirm current options.)

<u>Weatherstone</u>:

Sand - Gray - Brown - Buff - Cream - Soulard Green Light Charcoal - French Gray - Brick Red

Exposed Aggregate:

Tan w/Gray Matrix - Tan w/Brown Matrix
Tan w/Sand Matrix - Misty Gray w/Gray
Wyoming White

<u>Granitex (GTX)</u> 2078F, 4028F, 6208F, 1168F, 2098F

<u>Glass</u> Clear - Emerald - Blue - Amber Champaign - Charcoal

Custom Options Available

Size: 26" Sq. x 46" H. Weight: 840 lbs.

Capacity: 45 gallons with liner
Material: Reinforced Concrete
Wall Thickness: 2" at top with 2% pitch

Hardware: (4) - 1/2" Dia. elevator bolts, inserted on site

(4) - 1/2" Dia. zinc alloy inserts(1) - Locking mechanism(8) - 3/8" inserts for hinges

(8) - 3/8" x 1" bolts (4) - 1/4" Inserts

(2) - Aluminum Hinges w/pin(4) - 1/4" Dia. x 2-1/4" bolts

(2) - 1/4" x 20" bolts

(2) - 5/8" Dia. lifting inserts

Door: (1) - Plastic LLDPE Polyethylene door

(Brown - Sand - Gray - Soulard Green - Custom

Available.)

Door Options: Polyethelen plastic. 5 year warranty.

Packaging: Palletized

Maintenance: Occasionally rinse with water & mild

detergent

Re-seal annually

Anchoring: Optional

Logo Options: 16" Dia. x 1/4" Clear Lucite silkscreened with permanent inks. Installed

with four tamper-proof rivets, or custom

cast-in-place logo.

Special Features: Unit has concealed lock which uses a

standard allen

wrench key.

Top Opening: 16 1/2" x 7 1/2"

TF 1640 Liner


Size: 19-5/8" Sq. x 30-1/2" H

Weight: 13 lbs. Capacity: 45 gallons

Material: Polyethylene Plastic

Color: May vary Packaging: None

TE 1051 Model D Waste Container w/ Hooded Top & Plastic Door

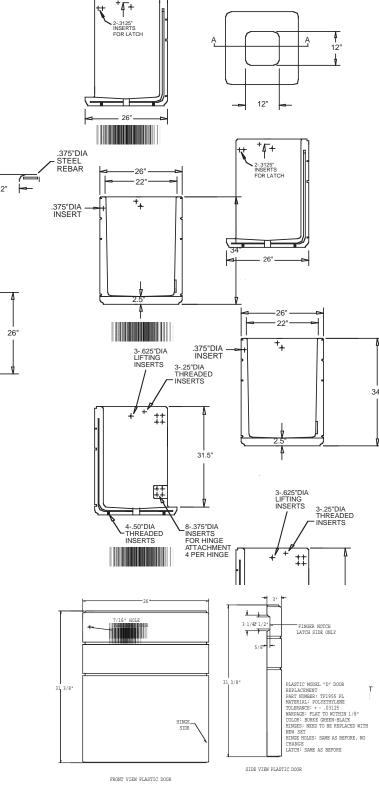

1.1 SUMMARY

A. Section includes: Furnish Precast Concrete Waste Containers indicated on drawings or specified herein.

1.2 REFERENCES

- A. American Society for Testing & Materials
 - 1. ASTM C33 2. ASTM C150 3. ASTM C31

1.5 SUBMITTALS

- A. Submit product data, shop drawings and samples.
 - Product Data: Manufacturer's specifications and technical data edited specifically for proposed system, including the following specific information:
 - a. Detailed specification of construction fabrication.
 - b. Manufacturer's installation instructions
 - c. Maintenance literature
 - d. Product warranty
 - 2. Shop Drawings: Indicate pertinent dimensions, general construction, component connections anchoring methods, hardware and installation procedures.
 - 3. Samples as requested by Architect.

1.6 QUALITY ASSURANCE

A. Qualifications of Manufacturer: Manufacturer to be prequalified by specifier prior to bidding. Failure to comply will result in disqualification of bid. Manufacturer to have at least five years experience in the manufacturer of precast concrete waste containers field proven for at least five years.

1.10 WARRANTY

Manufacturer shall submit a written warranty for precast products for the period of two (2) years upon acceptance of products.

2.1 MANUFACTURERS

A. Acceptable manufacturer for Precast Concrete Waste Containers to be known as:

Wausau Tile, Inc.

PO Box 1520, Wausau, WI 54402-1520.

(800) 388-8728 FAX (715) 355-4627

- B. Clarification Note: Drawings and installation specification are based on manufacturers proprietary literature from Wausau Tile, Inc. Other manufacturers shall comply with minimum levels of material and detailing indicated on drawings or specified herein.
- C. All Precast products for this project shall be of one manufacturer.

2.2 MATERIALS

- A. Portland Cement: ASTM C150 specifications for Portland Cement.
- B. Aggregates: All aggregates to meet ASTM C33 specifications, to be cleaned of foreign matter and properly graded to size.
- C. Coloring: Pigments used shall be inorganic, resistant to alkalinity and used as per manufacturers recommendations.

#