


TF 1194 Deerfield Waste Container w/Aluminum Low Profile Top & Liner

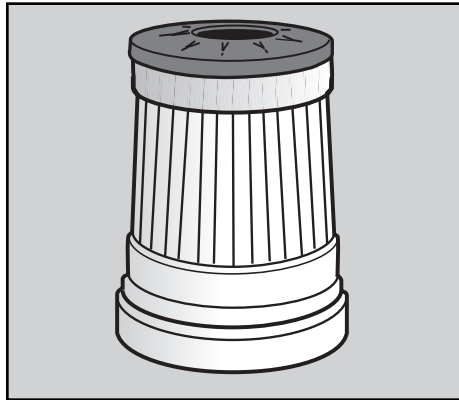

Options

(Note: Options may change without notice. Call to confirm current options.)

Weatherstone:

Sand - Gray - Brown - Buff - Cream
Light Charcoal - French Gray - Brick Red

Smooth Stained Concrete:

Sand - Gray - Brown - Red - Light Charcoal
Yellow - Orange

Custom Options Available




Size: 25" Dia. x 36" H.
Weight: 770 lbs.
Capacity: 31 gallons with liner.
Material: Reinforced Concrete.
Colors/Surfaces: See options.
Features: Part of Deerfield series.
Reinforcing: 1/2" & 1/4" Dia. steel rebar.
Wall Thickness: 2" at top with 2% pitch.
Hardware: (4) - 1/2" Dia. elevator bolts, inserted on site.
(4) - 1/2" Dia. zinc alloy inserts.
(1) - 3/4" Dia. nylon bearing sleeve.
(2) - 5/8" Dia. lifting inserts.
(1) - 3/8" Dia. zinc alloy inserts.
(2) - 1/4" Dia. threaded inserts.
Note: Sleeve must be lubricated at all times.
Packaging: Palletized.
Maintenance: Occasionally rinse with water & mild detergent.
Re-seal annually.
Anchoring: Optional.

TF 1495 Aluminum Low Profile Top

Size: 26-1/8" Dia. x 1-3/8" H.
24 lbs.
Material: Cast Aluminum.
Colors: Bronze.
(Color may change without notice.)
Hardware: (1) - Nylon washer.
(1) - Snap ring.
(1) - 3/4" Dia stainless steel shaft.
(1) - Striker Plate
(1) - Brass padlock & chain.
(1) - 3/8" Dia. x 1/2" bolt.
(2) - 1/4" Dia. x 1/2" bolt.
(1) - 1/4" x 1/2" Counter sunk screw.
Opening: 8-1/2" Dia.
Packaging: Shipped in carton.
Maintenance: Clean with mild soap and water.

TF 1625 Liner

Size: 20" Dia. x 28" H.
Weight: 11 lbs.
Capacity: 31 gallons.
Material: Recycled Polyethylene Plastic.
Color: May vary.
Packaging: None.

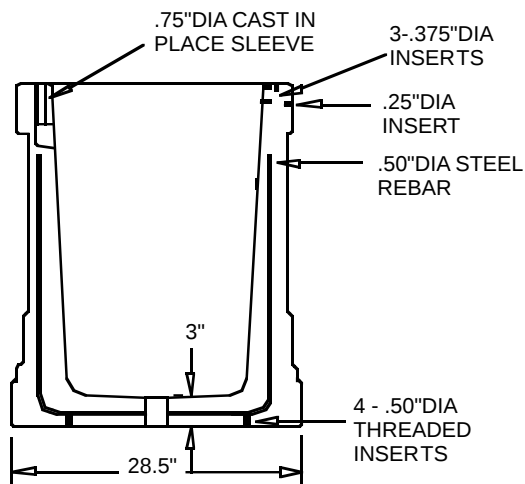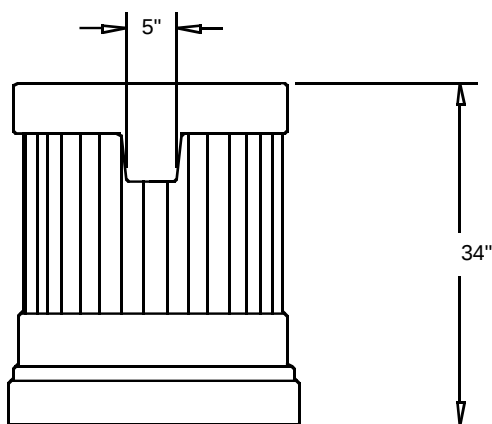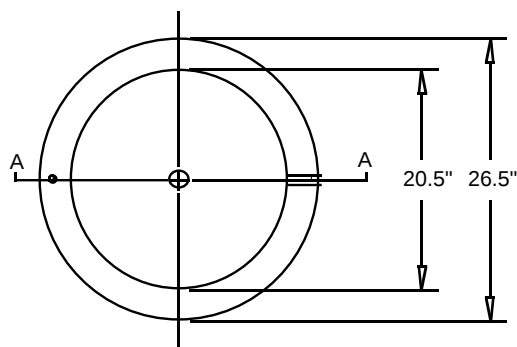

1.1 SUMMARY

- A. Section includes: Furnish Precast Concrete Waste Containers indicated on drawings or specified herein.

1.2 REFERENCES

- A. American Society for Testing & Materials
1. ASTM C33 2. ASTM C150 3. ASTM C31

1.5 SUBMITTALS

- A. Submit product data, shop drawings and samples.
1. Product Data: Manufacturer's specifications and technical data edited specifically for proposed system, including the following specific information:
 - a. Detailed specification of construction fabrication.
 - b. Manufacturer's installation instructions
 - c. Maintenance literature
 - d. Product warranty
 2. Shop Drawings: Indicate pertinent dimensions, general construction, component connections anchoring methods, hardware and installation procedures.
 3. Samples as requested by Architect.

1.6 QUALITY ASSURANCE

- A. Qualifications of Manufacturer: Manufacturer to be prequalified by specifier prior to bidding. Failure to comply will result in disqualification of bid. Manufacturer to have at least five years experience in the manufacturer of precast concrete waste containers field proven for at least five years.

1.10 WARRANTY

Manufacturer shall submit a written warranty for precast products for the period of two (2) years upon acceptance of products.

2.1 MANUFACTURERS

- A. Acceptable manufacturer for Precast Concrete Waste Containers to be known as:
Wausau Tile, Inc. Terra-Form Division.
PO Box 1520, Wausau, WI 54402-1520.
(800) 388-8728 FAX (715) 355-4627
- B. Clarification Note: Drawings and installation specification are based on manufacturers proprietary literature from Wausau Tile, Inc. Other manufacturers shall comply with minimum levels of material and detailing indicated on drawings or specified herein.
- C. All Precast products for this project shall be of one manufacturer.

2.2 MATERIALS

- A. Portland Cement: ASTM C150 specifications for Portland Cement.
- B. Aggregates: All aggregates to meet ASTM C33 specifications, to be cleaned of foreign matter and properly graded to size.
- C. Coloring: Pigments used shall be inorganic, resistant to alkalinity and used as per manufacturers recommendations.

#