

ANTI-GLARE LINEAR

TRACIA

MENDRISIO

DESIGN MARIO BOTTA - DANTE SOLCÀ

LOST DUO

DESIGN ERNESTO GISMONDI



Artemide®
ARCHITECTURAL


TRACIA SYSTEM




- cable suspended system of single and joining luminaire modules for indirect and direct T5 linear fluorescent lighting, Tracia is characterized by its unique exterior walls which, when illuminated, pass light through in a uniform pattern giving the appearance of a translucent presence
- pre-wired luminaire modules in extruded aluminum surfaced with a mirrored polycarbonate housing
- 2 separate switch circuits for the independent control of the direct and indirect lighting functions
- specular aluminum reflector provided for direct anti-glare emission (2 x T5) and indirect diffused emission (1 x T5)
- dust cover in polycarbonate
- light distribution: 34% indirect and 66% direct
- modules join in continuous linear runs, with required linear connectors, "L" connector allows for an uninterrupted layout in 90° directions to obtain a homogenous distribution throughout the open space
- feeder module contains supporting stainless steel cables adjustable at installation with pre-wired ceiling feeder canopy in steel and thermoplastic, mounting to standard electrical junction boxes
- ceiling non-feeder canopy in steel and thermoplastic with stainless steel cable, mounting directly to rigid ceiling surface (hardware not supplied)
- equipped with thermally protected, class P, high power factor 120V electronic fluorescent ballast
- for 277/347V electronic fluorescent ballast, dimmable electronic ballast, and emergency lighting options, please consult your Artemide Sales Representative

TRACIA SUSPENSION SYSTEM



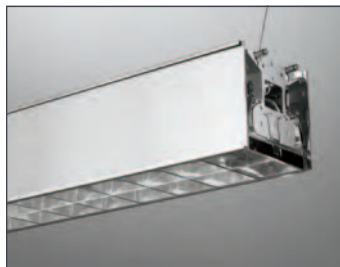

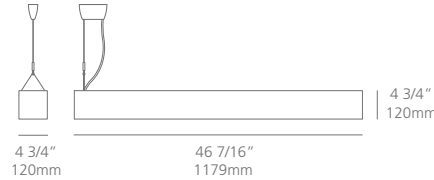

4 3/4"

120mm


46 7/16"

1179mm

4 3/4"

120mm

● silver (standard)




T5/G5

Cd/Klm

CODE	DESCRIPTION	LENGTH	WEIGHT
FEEDER MODULE			
T5/G5 - 28W	M145898 Tracia feeder module 3 x 28W FLU/EB	46 7/16" / 1179mm	9.9 lbs. / 4.50kg
T5/G5 HO - 54W	M145098 Tracia feeder module 3 x 54W FLU/EB HO	46 7/16" / 1179mm	9.9 lbs. / 4.50kg
NON-FEEDER MODULE			
T5/G5 - 28W	M146098 Tracia non-feeder module 3 x 28W FLU/EB	46 7/16" / 1179mm	9.2 lbs. / 4.16kg
T5/G5 HO - 54W	M145198 Tracia non-feeder module 3 x 54W FLU/EB HO	46 7/16" / 1179mm	9.2 lbs. / 4.16kg

TRACIA SUSPENSION SYSTEM COMPONENTS

	M145298 Tracia Module Suspension Cable 1 9/16" D x 39 3/8" L @ 0.2 lbs. 40mm D x 1000mm L @ 0.09kg		M145498 Tracia Module Linear Connector 4 3/4" x 4 3/4" @ 0.1 lbs. 120 x 120mm @ 0.05kg
	M145398 Tracia Module End Cover 4 3/4" x 4 3/4" @ 0.13 lbs. 120 x 120mm @ 0.06kg		M145598 Tracia Module 90° Connector 4 3/4" H x 6 1/8" L @ 0.85 lbs. 120mm H x 156mm L @ 0.39kg

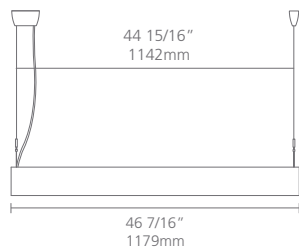

SINGLE SUSPENSION



LINEAR LIGHTING SYSTEM

MODULE OFF AND ON



SHOWROOM ASTON MARTIN, PARIS 15ÈME (F), HÉLÈNE AZIZA



MENDRISIO SYSTEM



- direct-indirect modular pendant system using 2 x 28W, 2 x 35W, or 2 x 54W T5 fluorescent lamps
- extruded aluminum body with grey painted finish
- available in two standard lengths: 49 3/8" and 61"
- anti-glare reflector in specular aluminum
- light distribution: 44% indirect and 56% direct
- feeder module contains supporting stainless steel cables adjustable at installation with pre-wired ceiling feeder canopy in steel and thermoplastic, mounting to standard electrical junction boxes
- electrical connection via quick connectors
- polycarbonate upper screen
- ceiling non-feeder canopy in steel and thermoplastic, with stainless steel cable, mounting directly to rigid ceiling surface (hardware not supplied)
- equipped with thermally protected, class P, high power factor 120V electronic fluorescent ballast
- for 277V electronic fluorescent ballast, dimmable electronic ballast, and emergency lighting options, please consult your Artemide Sales Representative



CANTINA PIETRA, SUVERETO (I) MARIO BOTTA, OFFICE MORETTI

MENDRISIO SUSPENSION SYSTEM



8 5/16"
211mm

49 3/16", 61"
1250, 1550mm

3 5/16"
84mm

T5/G5


Cd/Klm

grey (standard)

CODE		DESCRIPTION	LENGTH	WEIGHT
FEEDER MODULE				
T5/G5 - 28W		M147198 Mendrisio 49 feeder module 2 x 28W FLU/EB	49 3/16" / 1250mm	11.50 lbs. / 5.20kg
T5/G5 HO - 54W		M147398 Mendrisio 49 feeder module 2 x 54W FLU/EB HO	49 3/16" / 1250mm	11.50 lbs. / 5.20kg
T5/G5 - 35W		M147598 Mendrisio 61 feeder module 2 x 35W FLU/EB	61" / 1550mm	13.20 lbs. / 6.00kg
NON-FEEDER MODULE				
T5/G5 - 28W		M147098 Mendrisio 49 non-feeder module 2 x 28W FLU/EB	49 3/16" / 1250mm	11.00 lbs. / 5.00kg
T5/G5 HO - 54W		M147298 Mendrisio 49 non-feeder module 2 x 54W FLU/EB HO	49 3/16" / 1250mm	11.00 lbs. / 5.00kg
T5/G5 - 35W		M147498 Mendrisio 61 non-feeder module 2 x 35W FLU/EB	61" / 1550mm	12.75 lbs. / 5.80kg

MENDRISIO SUSPENSION SYSTEM COMPONENTS

	M147698 Mendrisio Suspension Cable 1 9/16" D x 55" L @ 0.2 lbs. 40mm D x 1400mm L @ 0.09kg ● grey (standard)
	M147798 Mendrisio End Cap 8 5/16" x 3 5/16" x 3/8" @ 0.07 lbs. 211 x 84 x 9mm @ 0.03kg ● grey (standard)
	M147898 Mendrisio Linear Connector 8 5/16" x 3 5/16" x 3/16" @ 0.09 lbs. 211 x 84 x 4mm @ 0.04kg ● grey (standard)

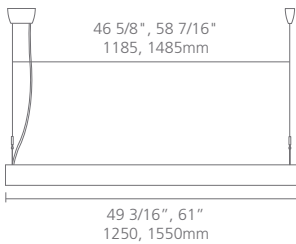

SINGLE SUSPENSION



LINEAR LIGHTING SYSTEM


LOST DUO



- cable suspended luminaire providing indirect and direct lighting using 2 x 54W HO or 2 x 80W HO T5 fluorescent lamps
- center support frame in extruded anodized aluminum
- available in two lengths: 48 1/8" and 59 1/8"
- diffuser body and side reflectors in specular aluminum
- two anti-glare grilles in metalized aluminum
- light distribution: 55% indirect and 45% direct
- end caps and canopy in translucent injection molded polycarbonate
- support cables in stainless steel supplied with grip-lock connectors for quick height adjustment at installation
- ceiling feeder and canopy mounting to standard electrical junction boxes
- non-feed support canopy in steel mounting directly to rigid ceiling surface (hardware not supplied)
- equipped with thermally protected, class P, high power factor 120V electronic fluorescent ballast
- for 277V electronic fluorescent ballast, dimmable electronic ballast, and emergency lighting options, please consult your Artemide Sales Representative

LOST DUO SUSPENSION



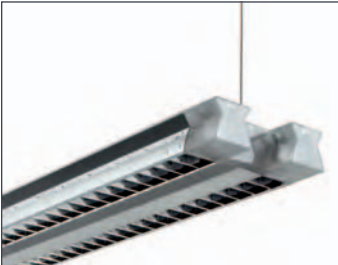

55 5/8" / 1413mm

center of junction box


max 45" / 1150mm

1 7/16" / 37mm

5 3/16" / 132mm


48 1/16", 59 5/8" / 1220, 1514mm


● anodized aluminum (standard)



T5/G5 Cd/Klm

CODE	DESCRIPTION	LENGTH	WEIGHT
T5/G5 HO - 54W	Lost duo suspension 2 x 54W HO FLU/EB	48 1/6" / 1220mm	4.0 lbs. / 1.80kg
T5/G5 HO - 80W		59 5/8" / 1514mm	4.8 lbs. / 2.20kg

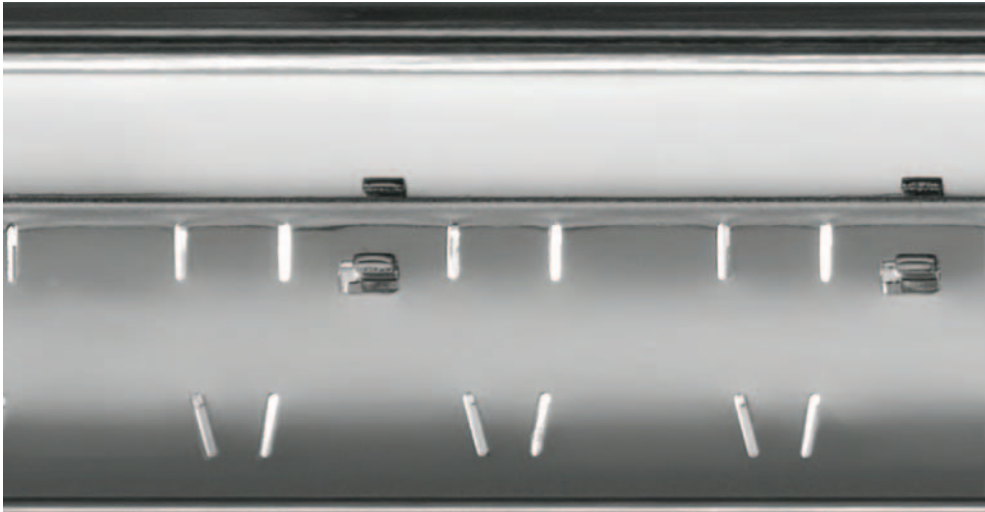

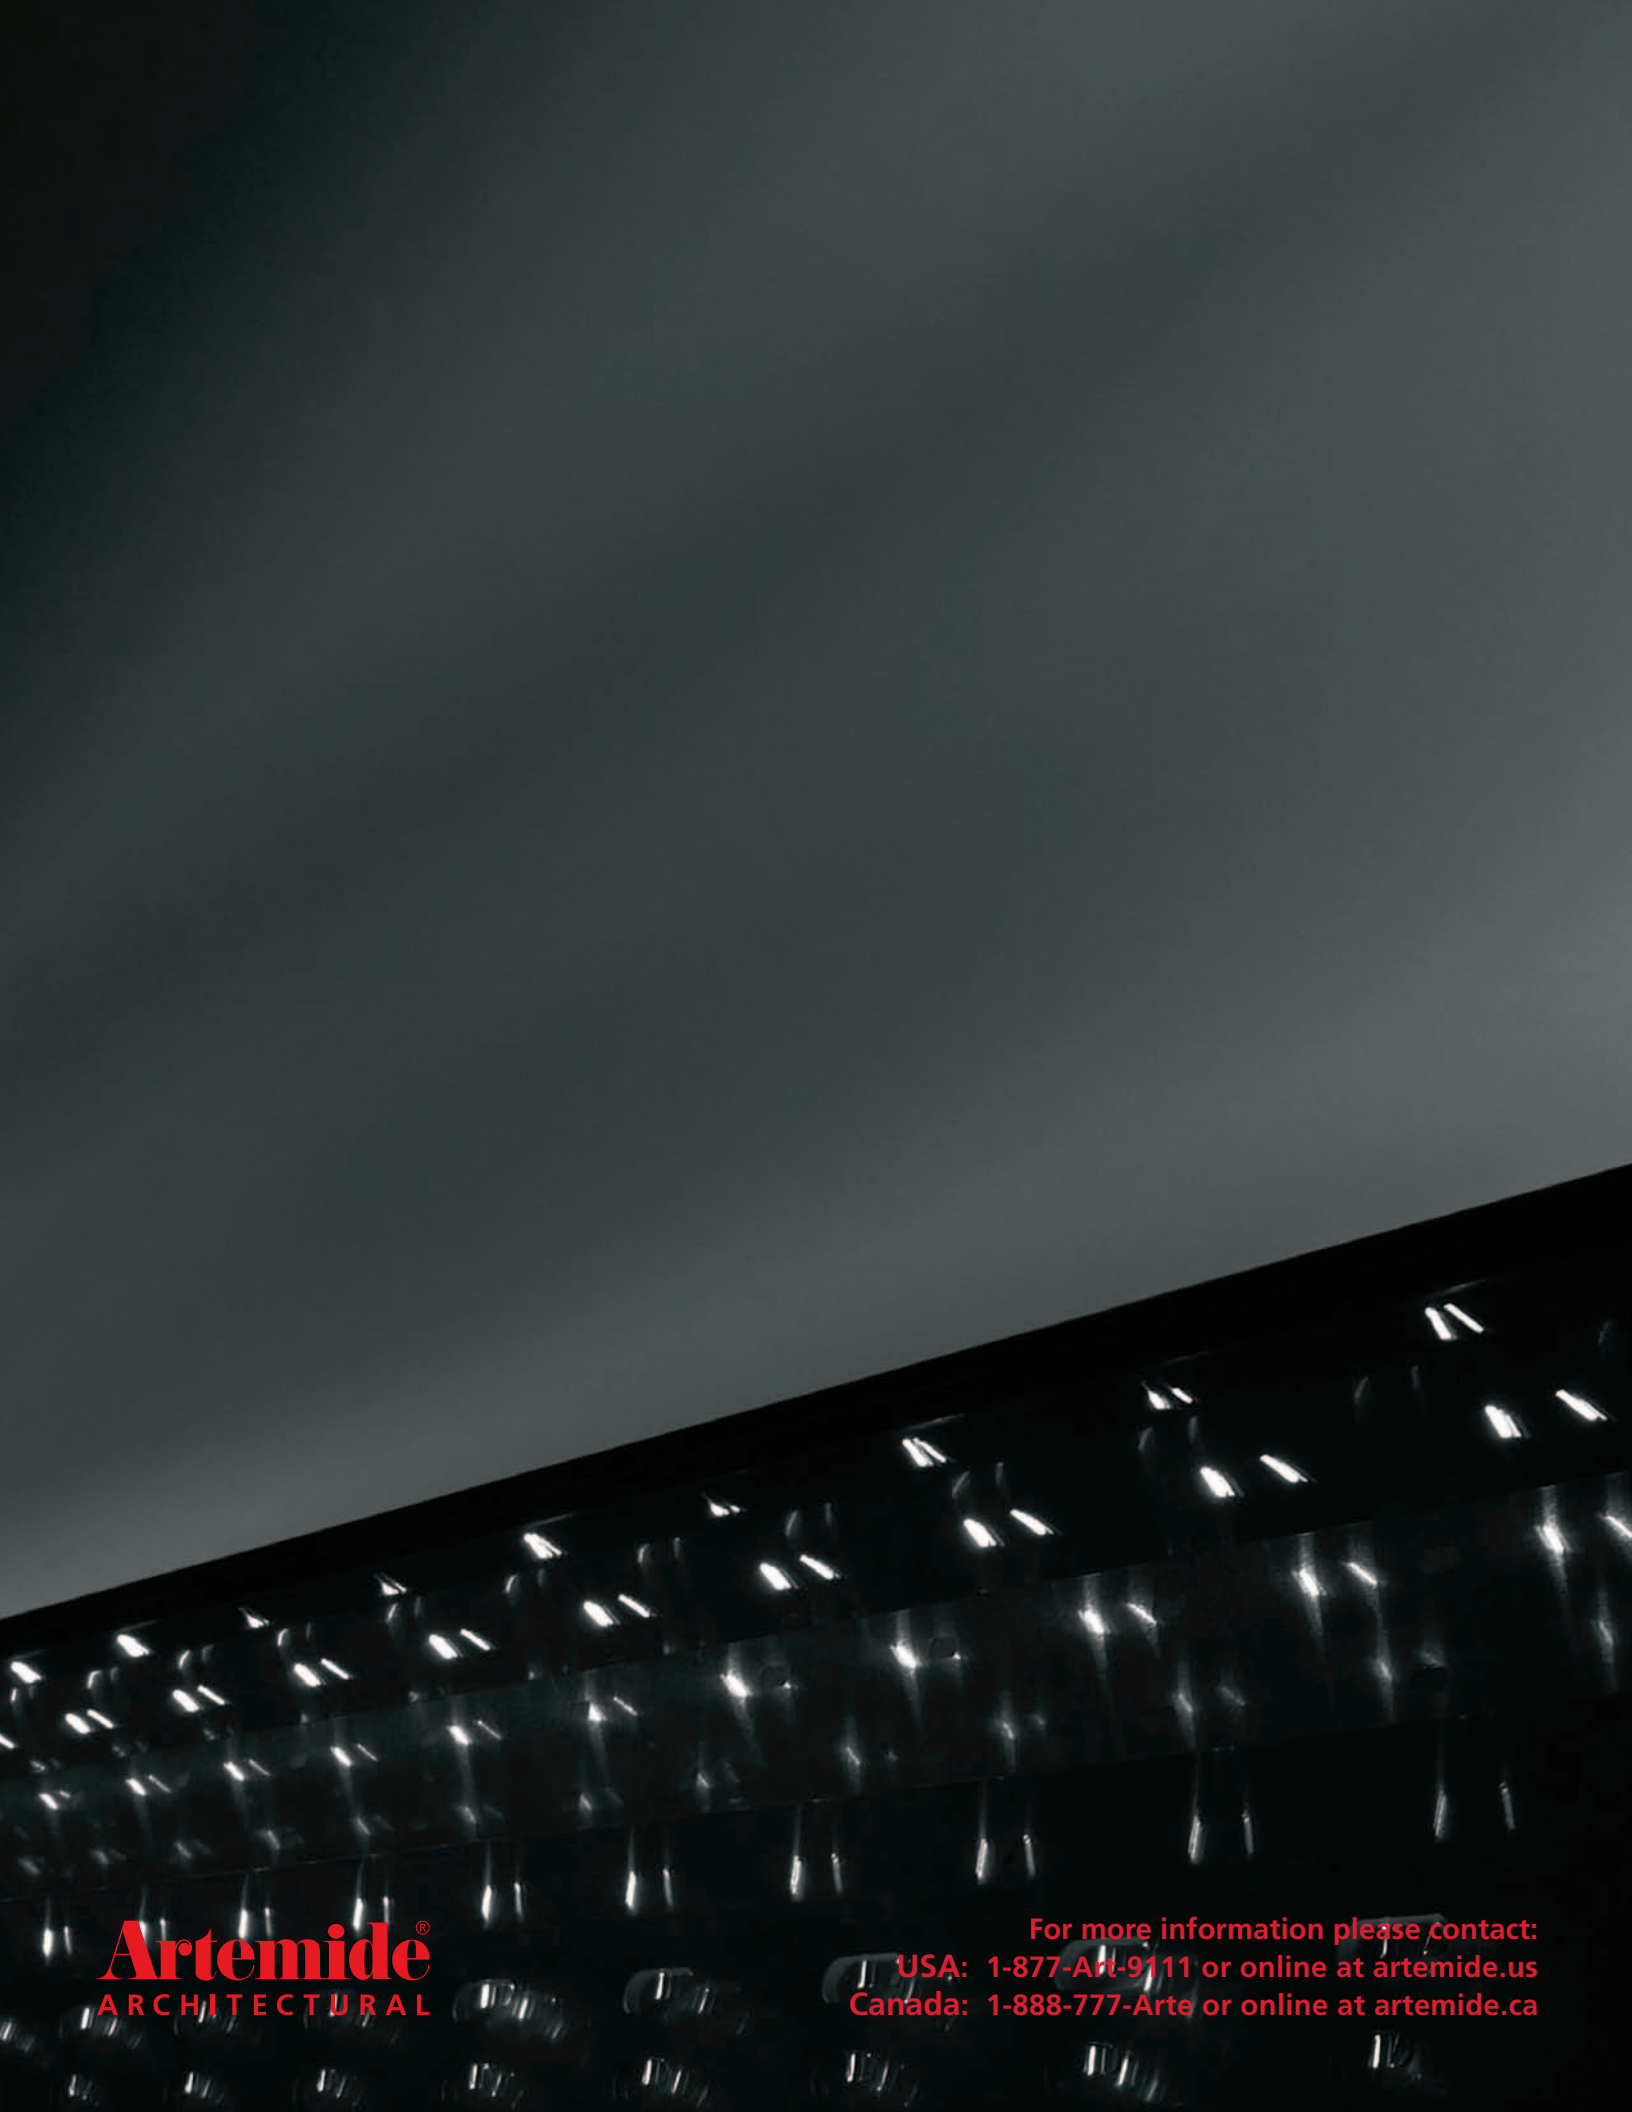

Artemide[®]
ARCHITECTURAL

For more information please contact:
USA: 1-877-Art-9111 or online at artemide.us
Canada: 1-888-777-Arte or online at artemide.ca