



PROJECT
FIXTURE TYPE
CATALOG#

2930 South Fairview Street  
 Santa Ana, CA 92704  
 Phone: 714 668 3660  
 Fax: 714 668 1107  
 allighting@earthlink.net  
 http://www.allighting.com


# BL-85/86/87/89

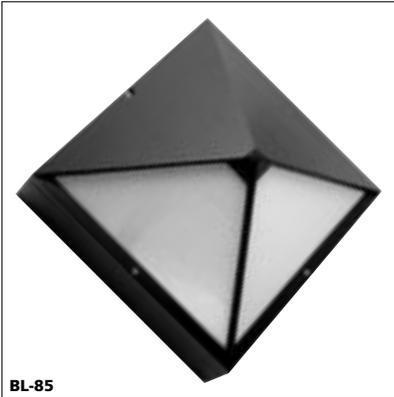

BL-85

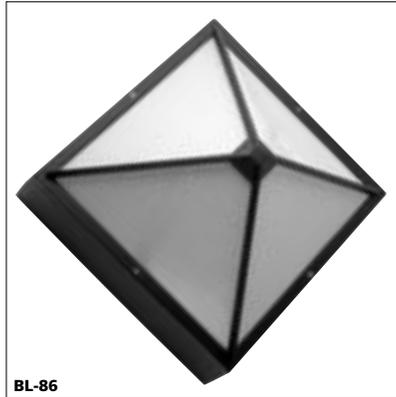

BL-86

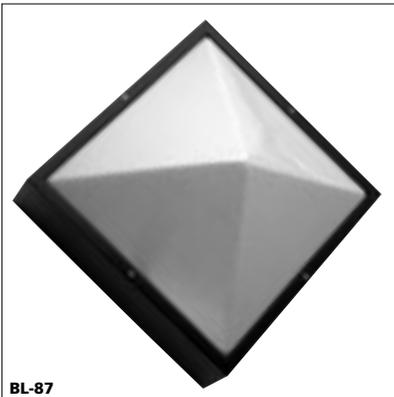

BL-87



BL-89

## Building Mount

**14" Square**

**Corridor**


**Walkways**

**Accent**

**Building Entrances**

## Luminaire Dimensions

Luminaire	A	B	C
BL-85	20"	8-1/2"	14"
BL-86	20"	8-1/2"	14"
BL-87	20"	8"	14"
BL-89	20"	8-5/8"	14"



## Specifications



**Certifications** The fixture shall be ETL and CETL listed for wet location. Also meets IP65 standard

**Ballast Housing** Cast aluminum with a minimum thickness of 1/8". Mounting plate welded to ballast housing for J-box mounting. Conduit mounting available, consult factory. Housing is fully gasketed with 3/16" extruded EDPM cord gasket.

**Lens Frame** Cast aluminum mounted to ballast housing with 10-24 stainless steel allen cap screws.

**Lens** Opal UV-stabilized polycarbonate (OP) is standard on the BL-85/86/87. Lens supplied with one-piece extruded silicone gasket. The BL-89 lens shall be tempered flat and textured P62 glass with silicone gasket.

**Ballast** Fluorescent ballasts for 42CFT and 2-D lamps are electronic (minus 20° C). Other fluorescent 13- through 26-watt quad tube is core & coil (0° C).

**Finish** BK-BZ-WH-GR-GY-NA baked enamel standard, other colors available.

## Product Order Guide

Series	Max Watts	Lamp Type	Voltage <sup>1</sup>	Lens	Finish <sup>1</sup>	Options
BL-85	(2) 26 CFQ	CFQ <sup>2</sup>	120	OP Opal Polycarbonate	BK Black	EMG Emergency Battery Backup
BL-86	42 CFT	CFT <sup>2</sup>	208	TG Textured Glass <sup>3</sup>	BZ Bronze	
BL-87	38 Watt 2-D	F382D	240		WH White	
BL-89	70 MH	E-17	277		GR Green	
	70 HPS	E-17			NA Natural Aluminum	
					GY Gray	
					CC Custom Color	

<sup>1</sup> Consult factory for other colors and voltages

<sup>2</sup> CF = single biax, CFQ = double biax, CFT = triple biax

<sup>3</sup> TG lens BL-89 only

BL