


**TWO-HANDLE CENTERSET LAVATORY FAUCET
WITH CONVENTIONAL SPOUT & FACTORY INSTALLED HANDLES**



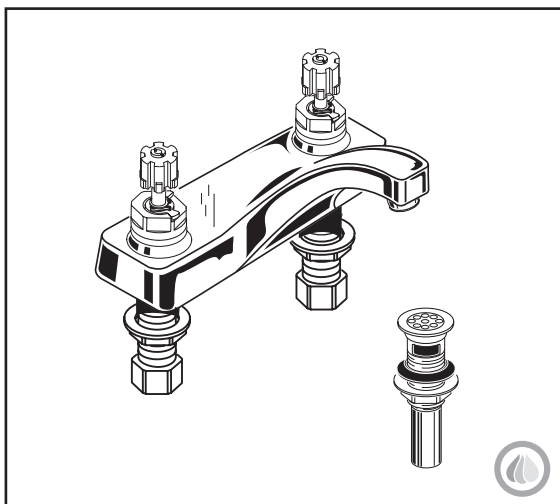

Shown without handles.

Faucet comes complete with factory installed handles.


V = Vandal-Resistant, H = Standard

MODEL NUMBER:

- 

☐ **5402.142H Centerset Lavatory Faucet**
 1.5 gpm pressure compensating aerator.
 Metal lever handles. Grid drain.
- 

☐ **5402.172H Centerset Lavatory Faucet**
 1.5 gpm pressure compensating aerator.
 Brass wrist blade handles. Grid drain.
- ☐ **5402.172V Centerset Lavatory Faucet**
 1.5 gpm pressure compensating aerator.
 Vandal-resistant brass wrist blade handles.
 Vandal-resistant aerator. Grid drain.

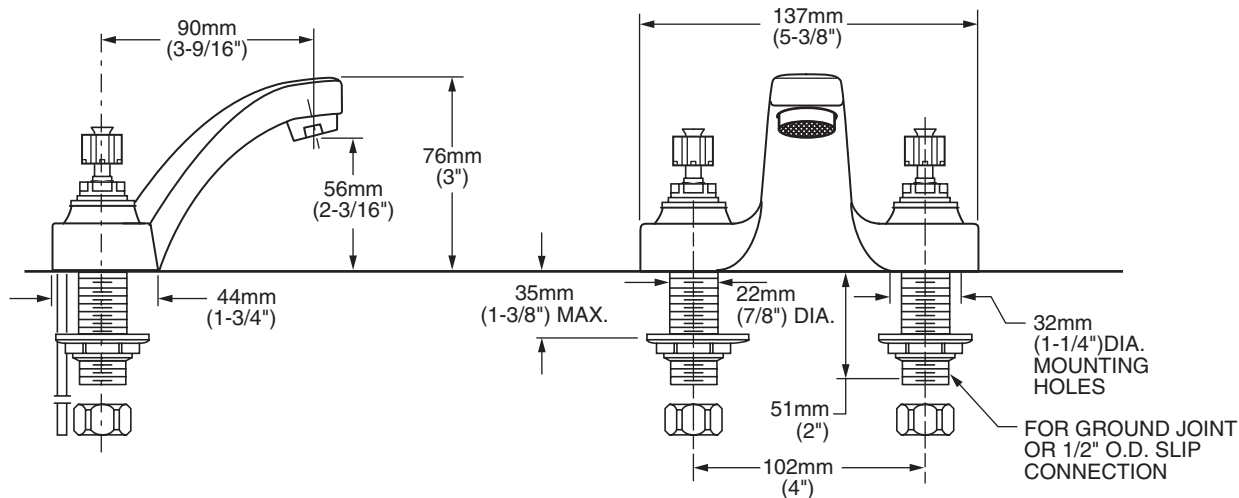

GENERAL DESCRIPTION:

Durable cast brass construction. Amarilis 1/4 turn washerless ceramic disc valve cartridges. One-half inch male inlet shanks with brass coupling nuts and shank nuts. All brass drain bodies with 1-1/4" (32mm) tailpieces. Vandal-resistant faucets feature vandal-resistant aerators, drains and index buttons on factory-installed handles. 1.5 gpm/5.7L/min. maximum flow rate.

PRODUCT FEATURES:

Pressure Compensating Aerator: Provides a constant water flow of 1.5 gpm throughout the pressure range.

Solid Brass Construction: Durable - Excellent in high use applications. Ideal for prolonged contact with water.

Ceramic Disc Valve Cartridges: Assures a lifetime of drip-free performance.

Low Lead: Meets NSF Standard 61/Section 9 & Prop 65 lead requirements.

Factory Installed Handles: Simplifies installation.


SUGGESTED SPECIFICATION:



4" centerset lavatory faucet shall be cast brass construction with all brass shank nuts and coupling nuts. Shall feature water-conserving 1.5 gpm/5.7L/min. pressure compensating aerator. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Fitting shall be American Standard Model # 5402.____.____.

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

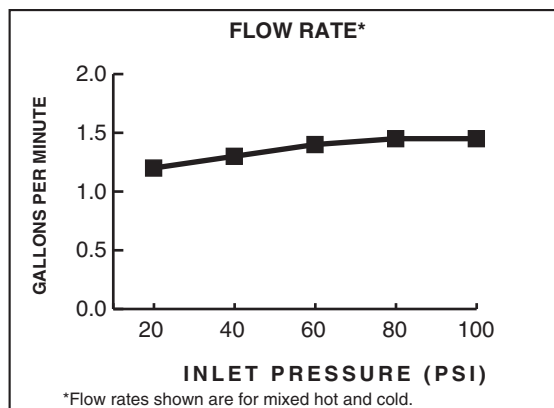**ASME A112.18.1
CSA B 125
NSF 61/Section 9**



			Product Number	Description	Finish
					Polished Chrome
					002
			5402.142H	Centerset lavatory faucet. 1.5 gpm/5.7L/min pressure compensating aerator. Metal Lever Handles. Grid drain.	
			5402.172H	Centerset lavatory faucet. 1.5 gpm/5.7L/min pressure compensating aerator. Brass Wrist Blade Handles. Grid drain.	
			5402.172V	Centerset lavatory faucet. Vandal-Resistant 1.5 gpm/5.7L/min pressure compensating aerator. Vandal-Resistant Brass Wrist Blade Handles. Grid drain.	

 **MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES
AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND
USABLE BUILDING FACILITIES-CHECK LOCAL CODES**

Other Aerators Available:

Part Suffix	Description
V15	1.5 gpm Pressure Compensating Vandal-Resistant Aerator
L15	1.5 gpm Pressure Compensating Laminar Flow
LV15	1.5 gpm Pressure Compensating Vandal-Resistant Laminar Flow Outlet
V05	0.5 gpm Pressure Compensating Vandal-Resistant Spray