

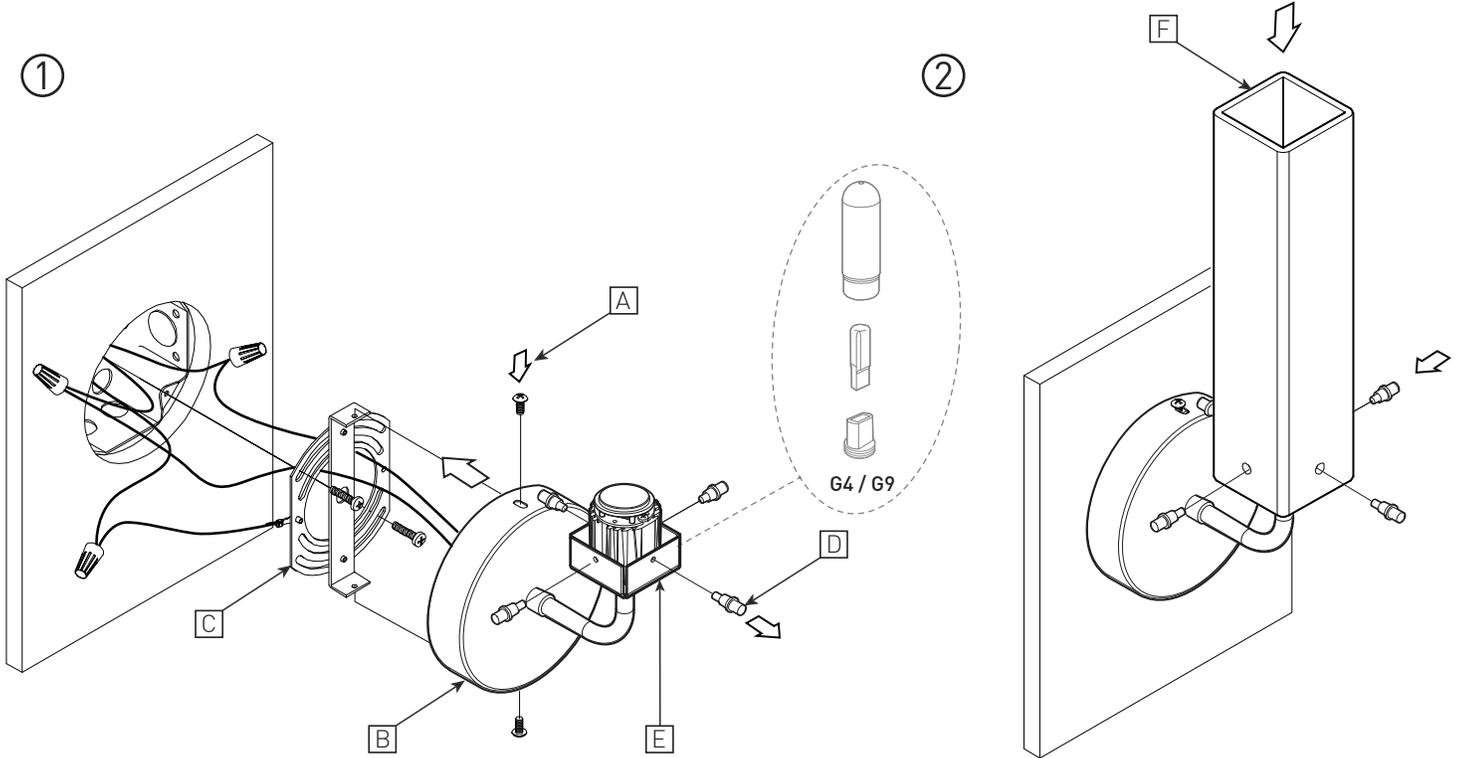




INSTALLATION MAINTENANCE

Wall surface Applique murale



BULBS AMPOULES



INSTALLATION

REMOVE SCREWS [A] (8-32 X 3/8in) TO RELEASE THE CANOPY [B] FROM THE UNIVERSAL CROSSBAR [C].

1- INSTALLATION ON 4" JUNCTION BOX

- 1.1 - INSTALL THE UNIVERSAL CROSSBAR [C], AND MAKE ALL WIRING CONNECTION.
- 1.2 - ATTACH THE WALL CANOPY [B] WITH 2-WAY MOUNTING SCREWS [A].

2- GLASS SHADE INSTALLATION

- 2.1 - REMOVE THE FOUR SCREWS [G] OF THE BRACKET [E].
- 2.2 - EXCEPT FOR THE LED VERSION WHERE THE LIGHT SOURCE IS INCLUDED, INSERT LIGHT BULB (NOT INCLUDED) INTO LIGHT SOCKET AND, FOR HALOGEN VERSION, ADD THE GLASS PROTECTOR.
- 2.3 - PUT THE GLASS SHADE [F] OVER THE BRACKET [E].
- 2.4 - SCREW BACK THE FOUR SCREWS [D] TO SUPPORT THE GLASS SHADE [F] ON THE BRACKET [E].

MAINTENANCE

REPEAT STEP 2.

INSTALLATION

DÉVISSER LES 2 VIS [A] (8-32 X 3/8in) POUR LIBÉRER LE PAVILLON [B] DE LA PLAQUE UNIVERSELLE [C].

1- INSTALLATION DE LA BOÎTE ÉLECTRIQUE 4"

- 1.1 - INSTALLER LA PLAQUE UNIVERSELLE [C] ET FAIRE LA CONNEXION DES FILS.
- 1.2 - FIXER LE PAVILLON [B] SUR LA BOÎTE ÉLECTRIQUE À L'AIDE DES (2) VIS DE MONTAGE FOURNIES [A].

2- INSTALLATION DU VERRE

- 2.1 - DÉVISSER LES QUATRE VIS [D] DU SUPPORT [E].
- 2.2 - À L'EXCEPTION DE LA VERSION DEL OÙ LA SOURCE LUMINEUSE EST FOURNIE ET INSTALLÉE, INSÉRER L'AMPOULE (NON FOURNIE) DANS LA DOUILLE ET, POUR LES VERSIONS HALOGÈNES, AJOUTER LE VERRE DE PROTECTION FOURNI.
- 2.3 - PLACER LE VERRE [F] PAR DESSUS LE SUPPORT [E].
- 2.4 - REVISSER EN PLACE LES QUATRE VIS [D] POUR SOUTENIR LE VERRE [F] SUR LE SUPPORT [E].

MAINTENANCE

RÉPÉTER L'ÉTAPE 2.