




## Revelation w/ EcoSlim Electrical Instructions (TSF)

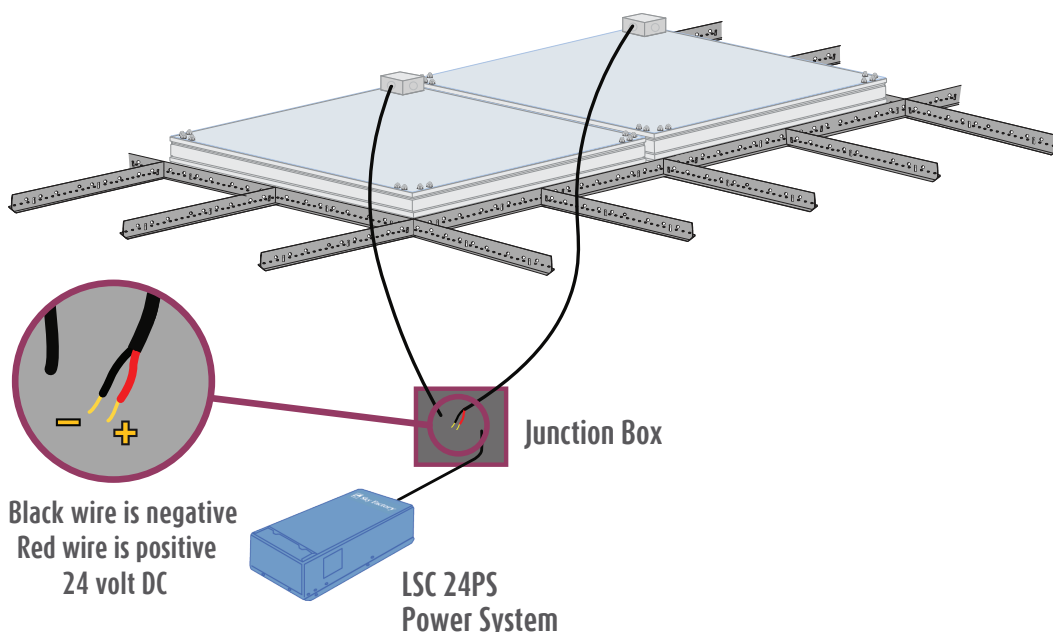

### Installation Packet Includes:

Revelation w/ EcoSlim Electrical Instructions (TSF)

ES26 Series Power System Fusing and Maximum Number of Fixtures per Power System  
ES33 Series Power System Fusing and Maximum Number of Fixtures per Power System  
ES34 Series Power System Fusing and Maximum Number of Fixtures per Power System  
ES36 Series Power System Fusing and Maximum Number of Fixtures per Power System  
ES44 Series Power System Fusing and Maximum Number of Fixtures per Power System  
Maximum Number of EcoPlus Fixtures per Branch Circuit: ES26, ES33, ES34, ES36 & ES44  
Custom SkyCeiling wiring diagram (where applicable)

EcoPlus and EcoSlim Drawings and Charts (TSF)

Wiring Diagrams EL000979, EL000980, EL000981, EL000982  
Dimming Multiple Power Systems EL000364  
Dimmer Assembly EL000195  
Sky Factory LSC 24PS Power System: Electrical Panel and Dimensions  
Wire Sizing Chart

For technical support at any time during the installation, please call us **toll free at 866-759-3228**.  
We want your installation to go as smoothly as possible. Thank you for choosing The Sky Factory.

## Revelation w/ EcoSlim electrical requirements:

ES26 Series = ES26, ES26M, ES26G

ES33 Series = ES33, ES33M, ES33G

ES34 Series = ES34, ES34M, ES34G

ES36 Series = ES36, ES36M, ES36G

ES44 Series = ES44, ES44M, ES44G

NOTE: For custom sizes, see Custom SkyCeiling wiring diagram (where applicable)

All EcoSlim fixtures are 24V DC only.

EcoSlim fixtures must be mounted in dry locations only.

EcoSlim fixtures must be powered by provided UL, CSA and CE Compliant TSF 24PS Power System

### Sky Factory TSF 24PS Power System:

Input: 90-264V, 47 - 63 Hz

Output: 24V DC

Maximum Watts (useable) per power system: 1000 w/ dimmer, 1080 w/o dimmer

Maximum of four branch circuits per power system:

250 Watts per branch maximum w/ dimmer

270 Watts per branch maximum w/o dimmer

Fully enclosed with NEMA 1 rating

Removeable front cover for easy wiring

Powder coated 18 gauge (0.0478 inch) steel enclosure; color – Blue (RAL 5015)

For electrical panel detail and mounting dimensions, see

EcoPlus and EcoSlim Drawings and Charts (TSF)''

AC input terminal block accepts wire size 10-18 AWG

Branch circuit terminal block accepts wire sizes 10-22 AWG

Power system must have 12" clearance for air flow. Wall mount recommended.

Power system must be mounted in dry locations.

Power system is specified for Sky Factory EcoSlim and EcoPlus fixtures only.

Dimmer control:

AC On/Off and Variable DC Output with one control

One control can operate multiple power systems

Control assembly mounts in standard single wide switch box.

## Revelation w/ EcoSlim electrical requirements (cont'd):

For maximum number of fixtures per power system, see pages 8-10

For maximum number of fixtures per branch circuit, see page 11

For installations with one or more custom sizes, see Custom SkyCeiling wiring diagram attached

Single dimmer control can operate multiple power systems. See

“EcoPlus and EcoSlim Drawings and Charts (TSF)”

RF filter, if used, is not provided by the Sky Factory.

One filter per power system if wired appropriately.

See Step 3 and “EcoPlus and EcoSlim Drawings and Charts (TSF)”

**CAUTION:** If one filter is used, branch circuits on output side of filter must be individually fused to avoid excessive current within any single branch.

For EcoSlim with LSC 24PS Power System wiring diagrams, see

“EcoPlus and EcoSlim Drawings and Charts (TSF)”

*Electrical work must be performed by a qualified electrician who is familiar with DC lighting systems and must conform to all local and national codes.*

## Non-Dimmable Certification:

LSC 24PS Power System when used with

ES22 Series, ES24 Series, ES26 Series, ES33 Series, ES34 Series, ES36 Series, ES44 Series,

EP22 Series, EP24 Series, EP26 Series, EP33 Series, EP34 Series, EP36 Series, EP44 Series fixtures

UL, CSA and CE certified by Intertek Group plc

## Dimmable Certification:

Dimmable LSC 24PS Power System when used with

ES22 Series, ES24 Series, ES26 Series, ES33 Series, ES34 Series, ES36 Series, ES44 Series,

EP22 Series, EP24 Series, EP26 Series, EP33 Series, EP34 Series, EP36 Series, EP44 Series fixtures

UL, CSA and CE certified by Intertek Group plc

## Step 1: Wiring the Revelation fixtures to the power system

See also “EcoPlus and EcoSlim Drawings and Charts (TSF)” and Custom SkyCeiling wiring diagram (where applicable)

EcoSlim Lighting System - ES26 Series to ES44 Series				
TSF Model No.	Light Box Dimensions and Weight Only		System Wattage (Max)	Input Current @ 24 Volts DC
	WxLxH	Weight		
ES26	22.8125 x 34.8125 x 3.72 (inches)	28.3 lb	63.2	2.64A
ES33	34.8125 x 34.8125 x 3.72 (inches)	20.8 lb	46.8	1.95A
ES34	34.8125 x 46.8125 x 3.72 (inches)	27.1 lb	56.2	2.34A
ES36	34.8125 x 70.8125 x 3.72 (inches)	40 lb	72.5	3.02A
ES44	46.8125 x 46.8125 x 3.72 (inches)	35.3 lb	65.5	2.73A
ES26M	57 x 177 x 9.54 (cm)	12.9 kg	63.2	2.64A
ES33M	87 x 87 x 9.54 (cm)	9.5 kg	46.8	1.95A
ES34M	87 x 117 x 9.54 (cm)	12.3 kg	56.2	2.34A
ES36M	87 x 177 x 9.54 (cm)	18.1 kg	72.5	3.02A
ES44M	117 x 117 x 9.54 (cm)	16 kg	65.5	2.73A
ES26G	59.5 x 184.5 x 9.54 (cm)	12.9 kg	63.2	2.64A
ES33G	90.8 x 90.8 x 9.54 (cm)	9.5 kg	46.8	1.95A
ES34G	90.8 x 122 x 9.54 (cm)	12.3 kg	56.2	2.34A
ES36G	90.8 x 184.5 x 9.54 (cm)	18.1 kg	72.5	3.02A
ES44G	122 x 122 x 9.54 (cm)	16 kg	65.5	2.73A

NOTE: For custom sizes, see also Custom SkyCeiling wiring diagram



**Notice:** The LED fixtures are 24V DC ONLY.

AC voltage connected directly to the fixtures  
will destroy the lighting system.

Fixtures are wired together in single or multiple branch circuits. Fixtures in each branch may be arranged in rows or clusters, depending on the installation.

## Step 1 continued

A junction box with 1/2" trade size knock-outs is attached on top corner of each fixture.

- Power leads inside fixture junction box are polarized, red (+) to (+) and black (-) to (-).
- Wire size 18 AWG stranded.

For maximum number of fixtures per power system, see page 8-10

For maximum number of fixtures per branch circuit, see pages 11

For installations with one or more custom sizes, see Custom SkyCeiling wiring diagram

Wire from fixture to power system branch circuit is polarized, (+) to (+) and (-) to (-).

- Wire and additional junction boxes from the fixtures to the power system supplied by others.
- Voltage drop will occur over long distances. For appropriate lengths and gauges, see Wire Sizing Chart in "EcoPlus and EcoSlim Drawings and Charts (TSF)"

Each power system has up to four branch circuits:

- In Non-Dimmable SkyCeilings, each branch is 270 Watts Maximum, see EL000979 and EL000981
- In Dimmable Systems, each branch is 250 Watts Maximum, see EL000980 and EL000982

Branch circuit terminal block on power system accepts wire sizes 10-16 AWG.



**Notice:** CHECK THE POLARITY BEFORE TURNING ON POWER. MAKE SURE:

Red wires on the fixtures go to the "+" terminals of the power system

Black wires on the fixtures go to the "-" terminals of the power system

**IF THE SYSTEM IS WIRED BACKWARD, IT WILL DESTROY THE LED'S!**

## Step 2: Wiring the power system

(For wiring the power system using an RF filter, see also Step 3.)

Power system enclosure must have a minimum 12" (30.5cm) clearance for adequate air flow for proper cooling and the screens must be inspected regularly for dust accumulation.

Connect AC line voltage to appropriate terminals on power system – “**L**” (**Line**), “**N**” (**Neutral**) and “**G**” (**Ground**). AC terminal block on power system accepts wire sizes 10-18 AWG.

External fuse in AC line is required. When using multiple power systems, each power system must have a dedicated, fused AC circuit:



**Notice:** AC LINE FUSE MUST BE LESS THAN OR EQUAL TO INTERNAL POWER SYSTEM FUSE.  
FOR POWER SYSTEM FUSING, SEE PAGES 8-10

For Dimming Systems Only:

Connect dimmer to primary power system with 16-22 AWG low voltage wire.  
(See EL000195 for dimmer assembly details.)

- Dimmer **BRT**(Bright) to power system **BRIGHT**
- Dimmer **COM**(Common) to power system **WIPER**
- Dimmer **DIM**(Dimmer) to power system **DIM**
- See EL000980 and EL000982.
- For operating multiple power systems on a single dimmer, see “multiple power systems” below

Install the dimmer switch in a standard wall box. Wiring and box for the dimmer switch provided by others.

When operating multiple power systems with one dimmer:

- Run three wires from dimmer to primary power system as detailed above.
- Run two wires from primary power system to additional power systems: **DIM** to **DIM** and **WIPER** to **WIPER**.
- See EL000364

### Step 3: Wiring the power system in MRI applications or applications requiring an RF filter

Power system must be located outside of shielded room in MRI applications.

**IN MRI APPLICATIONS, AN RF FILTER IS REQUIRED AND WILL BE SUPPLIED BY OTHERS.**



**Notice:** IF ONLY ONE FILTER IS USED, BRANCH CIRCUITS ON OUTPUT SIDE MUST BE INDIVIDUALLY FUSED TO AVOID EXCESSIVE CURRENT IN EVENT OF A FAILURE WITHIN ANY SINGLE BRANCH. SEE BELOW

To use one filter per power system with more than one branch

Inside the RF filter and on the Input side:

- Connect all positive, or "+", legs of the branch circuits from the power system to one leg of the RF filter.
- Connect all negative, or "-", legs of the branch circuits from the power system to the other leg of the RF filter.

Inside the RF filter and on the Output side:

- Connect the positive, or "+", leg of each branch circuit from the SkyCeiling to a 10 amp in-line fuse and then connect them to the leg of the RF filter which corresponds to the positive input.
- Connect the negative, or "-", leg of each branch circuit from the SkyCeiling to the leg of the RF filter which corresponds to the negative input.

See EL000981 and EL000982

### Step 4: Checking the Polarity



**Notice:** CHECK THE POLARITY BEFORE TURNING ON POWER. MAKE SURE:

Red wires on the fixtures go to the "+" terminals of the power system

Black wires on the fixtures go to the "-" terminals of the power system

**IF THE SYSTEM IS WIRED BACKWARD, IT WILL DESTROY THE LED'S!**

Revelation ES26 Series					
(Non-Dimming & No RF Filter/Dimming & No RF Filter/Non-Dimming & RF Filter/Dimming & RF Filter)					
Power System Fusing and Maximum Number of Fixtures per Power System					
Size Watts	AC In	Cert	Internal AC Fuse	Branch Circuits	Max Fixtures
200	85-264	UL CE	F5A/L250V 5X20 GLASS GFE	A	2
320	88-264	UL CE	F6.3A/L250V 5X20 GLASS GFE	A,B	4
480	85-264	UL CE	F10A/L250V 5X20 GLASS GFE	A,B	6
750	90-264	UL CE	F15A/L250V 5X20 CERAMIC GBM	A,B,C,D	10
1500	90-264	UL CE	F25A/H250V 6.3X32 CERAMIC ABP	A,B,C,D	12

Revelation ES33 Series					
(Non-Dimming & No RF Filter)					
Power System Fusing and Maximum Number of Fixtures per Power System					
Size Watts	AC In	Cert	Internal AC Fuse	Branch Circuits	Max Fixtures
200	85-264	UL CE	F5A/L250V 5X20 GLASS GFE	A	3
320	88-264	UL CE	F6.3A/L250V 5X20 GLASS GFE	A,B	6
480	85-264	UL CE	F10A/L250V 5X20 GLASS GFE	A,B	9
750	90-264	UL CE	F15A/L250V 5X20 CERAMIC GBM	A,B,C	14
1500	90-264	UL CE	F25A/H250V 6.3X32 CERAMIC ABP	A,B,C,D	20

Revelation ES33 Series					
(Dimming & No RF Filter/Non-Dimming & RF Filter/Dimming & RF Filter)					
Power System Fusing and Maximum Number of Fixtures per Power System					
Size Watts	AC In	Cert	Internal AC Fuse	Branch Circuits	Max Fixtures
200	85-264	UL CE	F5A/L250V 5X20 GLASS GFE	A	3
320	88-264	UL CE	F6.3A/L250V 5X20 GLASS GFE	A,B	6
480	85-264	UL CE	F10A/L250V 5X20 GLASS GFE	A,B,C	9
750	90-264	UL CE	F15A/L250V 5X20 CERAMIC GBM	A,B,C,D	14
1500	90-264	UL CE	F25A/H250V 6.3X32 CERAMIC ABP	A,B,C,D	16



Revelation ES34 Series (Non-Dimming & No RF Filter) Power System Fusing and Maximum Number of Fixtures per Power System					
Size Watts	AC In	Cert	Internal AC Fuse	Branch Circuits	Max Fixtures
200	85-264	UL CE	F5A/L250V 5X20 GLASS GFE	A	3
320	88-264	UL CE	F6.3A/L250V 5X20 GLASS GFE	A,B	5
480	85-264	UL CE	F10A/L250V 5X20 GLASS GFE	A,B	7
750	90-264	UL CE	F15A/L250V 5X20 CERAMIC GBM	A,B,C	12
1500	90-264	UL CE	F25A/H250V 6.3X32 CERAMIC ABP	A,B,C,D	16

Revelation ES34 Series (Dimming & No RF Filter/Non-Dimming & RF Filter/Dimming & RF Filter) Power System Fusing and Maximum Number of Fixtures per Power System					
Size Watts	AC In	Cert	Internal AC Fuse	Branch Circuits	Max Fixtures
200	85-264	UL CE	F5A/L250V 5X20 GLASS GFE	A	3
320	88-264	UL CE	F6.3A/L250V 5X20 GLASS GFE	A,B	5
480	85-264	UL CE	F10A/L250V 5X20 GLASS GFE	A,B,C	7
750	90-264	UL CE	F15A/L250V 5X20 CERAMIC GBM	A,B,C,D	12

Revelation ES36 Series					
(Non-Dimming & No RF Filter/Dimming & No RF Filter/Non-Dimming & RF Filter/Dimming & RF Filter)					
Power System Fusing and Maximum Number of Fixtures per Power System					
Size Watts	AC In	Cert	Internal AC Fuse	Branch Circuits	Max Fixtures
200	85-264	UL CE	F5A/L250V 5X20 GLASS GFE	A	2
320	88-264	UL CE	F6.3A/L250V 5X20 GLASS GFE	A	3
480	85-264	UL CE	F10A/L250V 5X20 GLASS GFE	A,B	5
750	90-264	UL CE	F15A/L250V 5X20 CERAMIC GBM	A,B,C	9
1500	90-264	UL CE	F25A/H250V 6.3X32 CERAMIC ABP	A,B,C,D	12

Revelation ES44 Series					
(Non-Dimming & No RF Filter)					
Power System Fusing and Maximum Number of Fixtures per Power System					
Size Watts	AC In	Cert	Internal AC Fuse	Branch Circuits	Max Fixtures
200	85-264	UL CE	F5A/L250V 5X20 GLASS GFE	A	2
320	88-264	UL CE	F6.3A/L250V 5X20 GLASS GFE	A	4
480	85-264	UL CE	F10A/L250V 5X20 GLASS GFE	A,B	6
750	90-264	UL CE	F15A/L250V 5X20 CERAMIC GBM	A,B,C	10
1500	90-264	UL CE	F25A/H250V 6.3X32 CERAMIC ABP	A,B,C,D	16

Revelation ES44 Series					
(Dimming & No RF Filter/Non-Dimming & RF Filter/Dimming & RF Filter)					
Power System Fusing and Maximum Number of Fixtures per Power System					
Size Watts	AC In	Cert	Internal AC Fuse	Branch Circuits	Max Fixtures
200	85-264	UL CE	F5A/L250V 5X20 GLASS GFE	A	2
320	88-264	UL CE	F6.3A/L250V 5X20 GLASS GFE	A,B	4
480	85-264	UL CE	F10A/L250V 5X20 GLASS GFE	A,B	6
750	90-264	UL CE	F15A/L250V 5X20 CERAMIC GBM	A,B,C,D	10
1500	90-264	UL CE	F25A/H250V 6.3X32 CERAMIC ABP	A,B,C,D	12

## Maximum Number of Revelation Fixtures per Branch Circuit

ES26 Series = ES26, ES26M, ES26G

ES33 Series = ES33, ES33M, ES33G

ES34 Series = ES34, ES34M, ES34G

ES36 Series = ES36, ES36M, ES36G

ES44 Series = ES44, ES44M, ES44G

Number of Branch Circuits	Type of Fixture (Without RF Filter)				
	ES26 Series Non-Dimmable	ES33 Series Non-Dimmable	ES34 Series Non-Dimmable	ES36 Series Non-Dimmable	ES44 Series Non-Dimmable
1	3	5	4	3	4
2	6	10	8	6	8
3	9	15	12	9	12
4	12	20	16	12	16
Number of Branch Circuits	Type of Fixture (Without RF Filter)				
	ES26 Series Dimmable	ES33 Series Dimmable	ES34 Series Dimmable	ES36 Series Dimmable	ES44 Series Dimmable
1	3	4	3	3	3
2	6	8	6	6	6
3	9	12	9	9	9
4	12	16	12	12	12
Number of Branch Circuits	Type of Fixture (With RF Filter)				
	ES26 Series Non-Dimmable	ES33 Series Non-Dimmable	ES34 Series Non-Dimmable	ES36 Series Non-Dimmable	ES44 Series Non-Dimmable
1	3	4	3	3	3
2	6	8	6	6	6
3	9	12	9	9	9
4	12	16	12	12	12
Number of Branch Circuits	Type of Fixture (With RF Filter)				
	ES26 Series Dimmable	ES33 Series Dimmable	ES34 Series Dimmable	ES36 Series Dimmable	ES44 Series Dimmable
1	3	4	3	3	3
2	6	8	6	6	6
3	9	12	9	9	9
4	12	16	12	12	12