


Drawing # ML1IN

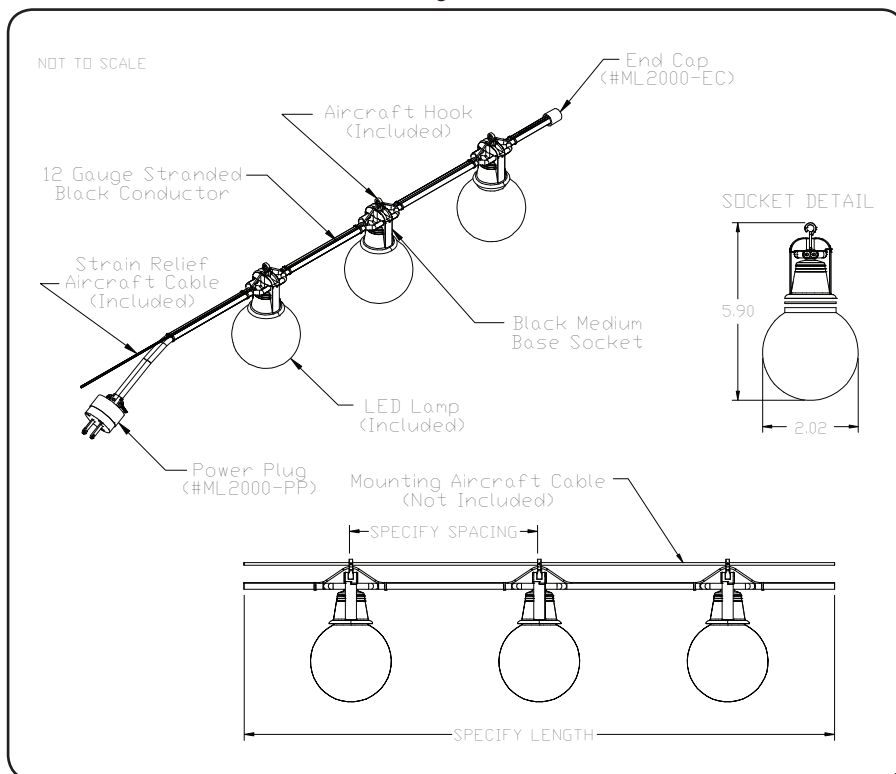

Read Instructions Entirely Before Starting Installation:

1. Read and follow all safety instructions listed below
2. Do not cover MarketLite as the covering may cause it to overheat, melt, and even ignite.
3. Do not use MarketLite if damaged, such as, broken outer jacket, loose connections, or frayed wire insulation. Inspect periodically.
4. Do not secure MarketLite with staples, nails, or like means that might damage the insulation. Secure it by using aircraft cable and mounting hooks provided.
5. Do not submerge MarketLite in liquid.
6. Do not install MarketLite on places where it is subject to continuous flexing.
7. Do not mount MarketLite inside cabinets, tanks, or enclosures of any kind.
8. Do not over tighten bulb. Over tightening bulb will break the seal and allow water to enter the bulb.
9. Ground Fault Circuit Interruptor (GFCI) protections should be provided on circuits or outlets when MarketLite is used for outdoor applications.
10. Surge protector must be set up for electrical power system to avoid damaging MarketLite lighting system.

WARNING: When using MarketLite for any application, basic safety precautions should always be followed to reduce the risk of fire, electric shock and personal injuries. MarketLite must be installed in accordance with the NEC or CEC as applicable. Do not install MarketLite in hazardous locations or closer than 6" from any curtain or similar combustible material.

Maximum Runs

Volts	Watts	Max. Watts Per Run	12" O/C	18" O/C	24" O/C
120V		1920W			
12V	5	240W(48 Lamps)	48'	72'	96'
12V	15	240W(16 Lamps)	16'	24'	32'

Product Features

- Applications:** Indoor and Outdoor
Voltage: 120V or 12V
Socket Base: Medium Base
Length: Built to Order
Finish: Black
Feed: Standard 6' Leads
Mounting: Aircraft Cable Included
Listing: Dry or Wet Location

