


ESC130

Inground Luminaires

1/6



we-ef

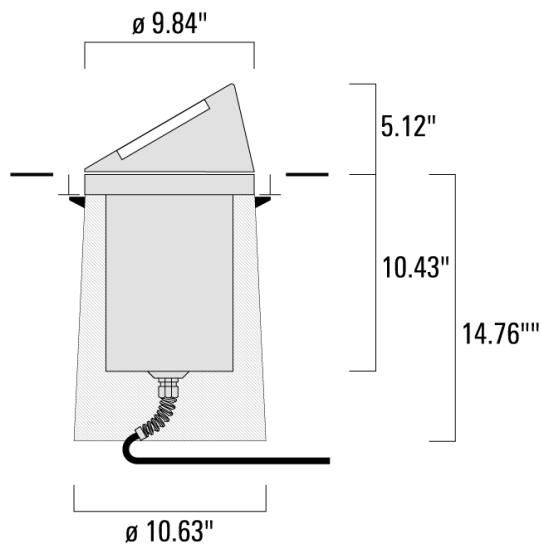

Description

IP67. Semi-recessed, inground uplight. Suitable for installation in concrete or earth. Ideal luminaire for the uplighting of trees, where the protection of lens from falling debris or leaves is desired. The 30° 'hood' also prevents glare to adjacent pedestrian traffic.

ESC130

Inground Luminaires

2/6



we-ef

Specifications

Material Specification

Body:	Stainless steel body. Diecast marine grade aluminum hood. Composite outer housing.
Lens:	3/8 in thick clear tempered glass lens
Colours:	RAL9004 Black RAL9007 Grey Metallic RAL9016 White RAL8019 Dark Bronze
Gasket:	Silicone rubber gasket
Fasteners:	PCS polymer coated stainless steel
Ingress protection:	IP67
Impact protection:	IK10+
Corrosion protection:	5CE
Mounting:	Suitable for installation in concrete or in earth.
Listings:	Please contact WE-EF for ETL/UL listing status

Electrical Specification

Power supply:	Integral [ECG] CMH ballast for 120 or 277 volt supply. Specify voltage.
Driver / Ballast:	Integral ECG control gear
Termination:	Factory sealed termination chamber
Cable:	3 feet of flexible 18/3 cable

Ambient Temperature

Ta less than 25 degrees C.

ESC130

Inground Luminaires

3/6



Choices

Light Distributions	Lumens	Wattages	Colour Temperatures	Colours
 symmetric, medium beam [M]	3300	35	 3000K	 RAL9004 Black
 symmetric, very narrow beam [VN]				 RAL9007 Grey Metallic
				 RAL9016 White
				 RAL8019 Dark Bronze

ESC130

Inground Luminaires

4/6



Configurations

Light Distributions	Part ID	Light Source	Lumen	Gear	Weight	Link
 symmetric, medium beam [M]	610-3050	CMH39 T-6/ G-12 base	3300	electronic gear	18.00	

ESC130

Inground Luminaires


5/6



Configurations

Light Distributions	Part ID	Light Source	Lumen	Gear	Weight	Link
 symmetric, very narrow beam [VN]	610-3051	CMH39 T-6/ G-12 base	3300	electronic gear	18.00	

Related Families / ESC100

Family		Dimensions	Wattage	Lumen	Links	
					Links	Download Data Sheet
ESC130 LED		9.84	18 W	2217		
ESC140 LED		12.01	24 W	3228		

ESC130

Inground Luminaires


6/6



Optical Accessories

CTA® Cool Touch Adaptor

611-8030 Cool Touch Adapter CTA



Electrical Accessories

Sealable junction box

	C1	M1	M2
697-8072 Sealable junction box SJB 130	5.75	Ø 0.39	Ø 0.47 - 0.75

